UW KANE HALL CAAMS UPGRADES

ABBREVIATIONS

&	AND
L	ANGLE
@	AT
Ø	DIAMETER
#	POUND OR NUMBER
(E)	EXISTING
CL	CENTERLINE
PL	PROPERTY LINE
A.B.	ANCHOR BOLT
ABV	ABOVE
AC	AIR CONDITIONING
ACP	ACOUSTIC CEILING PANEL
ACU	AIR CONDITION UNIT
ADJ	ADJUSTABLE
AFF	ABOVE FINISHED FLOOR
ALT	ALTERNATE
ALUM	ALUMINUM
APPROX	APPROXIMATELY
ARCH	ARCHITECT, ARCHITECTURAL
BRK	BRICK
BLDG	BUILDING
BLW	BELOW
BM	BEAM
B.O.	BOTTOM OF
BRS	BACKER ROD & SEALANT
CB	CATCH BASIN
CBB	CEMENT BACKER BOARD
CEM	CEMENT
CJ	CONTROL JOINT
CL	CENTERLINE
CLG	CEILING
CLR	CLEAR
CO	CLEAN OUT
COL	COLUMN
CONC	CONCRETE
COND	CONDITION
CONT	CONTINUOUS
CPT	CARPET
CT	CERAMIC TILE
CT.B	CERAMIC TILE BASE
CTR	CENTER
CTW	CURTAIN WALL
DBL	DOUBLE
DEMO	DEMOLISH
DF	DRINKING FOUNTAIN
DIA	DIAMETER
DIFF	DIFFUSER
DIM	DIMENSION
DISP	DISPENSER
DK	DECKING
DN	DOWN
DR	DOOR
DS	DOWNSPOUT
DTL	DETAIL
DW	DISHWASHER
E	EAST
EA	EACH
ECS	EXTERIOR COMPOSITE SIDING
EF	EXHAUST FAN
EFG	ENTRANCE FLOOR GRILLE
EJ	EXPANSION JOINT
EL	ELEVATION
ELEC	ELECTRICAL
ELEV	ELEVATOR
EMERG	EMERGENCY
EPX	EPOXY
EQ	EQUAL
EXP	EXPANSION
EXT	EXTERIOR
FBP	FIBER BOARD PANEL
FD	FLOOR DRAIN
FE	FIRE EXTINGUISHER
FF	FINISH FLOOR
FH	FIRE HYDRANT
FIN	FINISH
FLR	FLOOR
F.O.	FACE OF
FOIC	FURNISHED BY OWNER, INSTALL BY CONTRACTOR
FOIO	FURNISHED BY OWNER INSTALL BY OWNER
FR	FIRE RESISTANT
FRP	FIBERGLASS REINFORCED PANEL
FS	FLOOR SINK
FT	FEET
GA	GAUGE
GALV	GALVANIZED
GB	GRAB BAR
GC	GENERAL CONTRACTOR
GL	GLASS
GLB	GLU-LAM BEAM
GND	GROUND
GR	GRADE
GRPH	GRAPHIC
GRT'D	GROUTED
GWB	GYPSUM WALL BOARD
HB	HOSE BIBB
HC	HANDICAP
HCMU	HOLLOW CLAY MASONRY UNIT
HDWD	HARDWOOD
HDWE	HARDWARE
HT	HEIGHT
HTSAM	HIGH-TEMP SELF ADHERED MEMBRANE
HM	HOLLOW METAL
HR	HOUR
HORIZ	HORIZONTAL
I.D.	INSIDE DIAMETER
IGU	INSULATED GLAZED UNIT
INSUL	INSULATION
INT	INTERIOR
IR.GWB	IMPACT RESISTANT GWB
JAN	JANITOR
JT	JOINT
KIT	KITCHEN
LAB	LABORATORY
LAM	LAMINATE
LAV	LAVATORY
LKR	LOCKER
LOC	LOCATE
LT	LIGHT
LVL	LAMINATED VENEER LUMBER
L.WD	LINEAR WOOD PANEL
M	MEN'S
MATL	MATERIAL
MAX	MAXIMUM
MC	MEDICINE CABINET
MECH	MECHANICAL
MEMB	MEMBRANE
MFR	MANUFACTURER
MIN	MINIMUM
MIR	MIRROR
MISC	MISCELLANEOUS
MH	MANHOLE
MO	MASONRY OPENING
MP	METAL PANEL
MTD	MOUNTED
MTL	METAL
MULL	MULLION
N	NORTH
NA	NOT APPLICABLE
NIC	NOT IN CONTRACT
NOM	NOMINAL
NTS	NOT TO SCALE
NR	NOT RATED
OA	OVERALL
OBS	OBSCURE
O.C.	ON CENTER
O.D.	OUTSIDE DIAMETER
OFF	OFFICE
OPNG	OPENING
OPP	OPPOSITE
OTS	OPEN TO STRUCTURE
PAP	PREFINISHED ACOUSTICAL PANEL
PC	PRECAST CONCRETE
PCLT	PORCELAIN TILE
PL	PLATE
PLAS	PLASTER
PLY	PLYWOOD
P.LAM	PLASTIC LAMINATE
PNT	PAINT
POC	POINT OF CONNECTION
PR	PAIR
PSL	PARALLEL STRAND LUMBER
PT	PRESSURE TREATED
PTN	PARTITION
QT	QUARRY TILE
R or RAD	RADIUS
RB	RESILIENT BASE
RCP	REFLECTED CEILING PLAN
RD	ROOF DRAIN
REF	REFERENCE
REFR	REFRIGERATOR
REINF	REINFORCED
RELOC	RELOCATE
REQ'D	REQUIRED
RES	RESILIENT
RM	ROOM
RO	ROUGH OPENING
RV	ROOF VENT
RL	RAIN WATER LEADER
S	SOUTH
SA	SMOKE ALARM
SAM	SELF-ADHERED MEMBRANE
SC	SOLID CORE
SCWD	SOLID CORE WOOD DOOR
S.CONC	SEALED CONCRETE
SCHED	SCHEDULE
SECT	SECTION
SFRM	SPRAYED FIRE-RESISTANT MATERIAL
SG	SAFETY GLASS
SHT	SHEET
SIM	SIMILAR
SPEC	SPECIFICATION
SQ	SQUARE
SRF	SLIP RESISTANT FLOORING
S.S.	STAINLESS STEEL
ST	STONE
STA	STATION
STD	STANDARD
STF	STOREFRONT
STL	STEEL
STN	STAIN
STN.T	STAIN (TRANSPARENT)
STOR	STORAGE
STRUCT	STRUCTURE
SOG	SLAB ON GRADE
SUSP	SUSPENDED
SYM	SYMMETRICAL
TMP	TEMPERED
T&G	TONGUE & GROOVE
TEL	TELEPHONE
TER	TERRAZZO
THK	THICK
T.O.	TOP OF
TS	TUBE STEEL
TV	TELEVISION
TYP	TYPICAL
UL	UNDERWRITERS' LABORATORIES
UNO	UNLESS NOTED OTHERWISE
UTIL	UTILITY
VCT	VINYL COMPOSITION TILE
VERT	VERTICAL
VEST	VESTIBULE
VIF	VERIFY IN FIELD
VTR	VENT THRU ROOF
W	WEST
W/	WITH
WC	WATER CLOSET
WD	WOOD
WF	WIDE FLANGE
WIN	WINDOW
W/O	WITHOUT
WOM	WALK OFF MAT
WM	WOMEN'S
WP	WATERPROOFING
WR	WATER RESISTANT
WRB	WATER-RESISTIVE BARRIER
WSCT	WAINSCOT
WT	WEIGHT
WWR	WELDED WIRE REINFORCEMENT

MATERIAL SYMBOLS

CMU
BRICK
CONCRETE
SAND
GRAVEL
EARTH
STEEL
ALUMINUM
BACKERBOARD
GYPSUM WALL BOARD/SHEATHING
ACOUSTICAL CEILING TILE
EPS OR XPS INSULATION
FOAM IN PLACE INSULATION
POLYISO INSULATION
BATT INSULATION
SEMI-RIGID INSULATION (MINERAL WOOL)
FINISHED WOOD
PLYWOOD FINISHED

DRAFTING SYMBOLS

1 A101 SIM	WALL SECTION
1 A101 SIM	BLDG SECTION
X A3.0	EXTERIOR ELEVATION
1 1 A6.0 1 1	INTERIOR ELEVATION
1 A101 SIM	DETAIL
PROJECT NORTH TRUE NORTH	NORTH ARROW
00	GRID HEAD
101	ROOM TAG
1i	WINDOW OR SKYLIGHT TAG
1i	STOREFRONT TAG
FRTYPE	WALL TAG
C1	CASEWORK TAG
FRTYPE	FLOOR, CEILING, SOFFIT & ROOF TAG
1i	LIGHTING AND FURNITURE TAG
1i	EQUIPMENT TAG
PNT-1	MATERIAL TAG
DOOR	DOOR TAG
1	KEY NOTE
NAME ELEVATION	ELEVATION NOTE
XXX T.O. XXX	SPOT ELEVATION
CL	CENTERLINE
PL	PROPERTY LINE
XXXXX	FLOOR TRANSITION
1 DESCRIPTION	REVISION
	BREAKLINE
	DIMENSION POINT
1 A101 SIM	ENLARGED PLAN OR DETAIL CALLOUT

GENERAL NOTES

1. REFER TO ELECTRICAL & SECURITY DRAWINGS FOR ADDITIONAL NOTES AND SYMBOLS.
2. MATERIALS, ASSEMBLIES AND NOTED ITEMS ARE NEW UNLESS OTHERWISE NOTED.
3. CONTRACTOR SHALL VERIFY CONDITIONS. NOTIFY THE ARCHITECT OF ANY CONDITIONS INCONSISTENT WITH THE INTENT OF THE DRAWINGS PRIOR TO STARTING OR CONTINUING WORK IN THE AREA CONCERNED.

CODE:
1. ALL WORK SHALL CONFORM TO APPLICABLE CODES AND LOCAL BUILDING REQUIREMENTS, WHICH INCLUDE THE MOST CURRENT EDITIONS OF THE INTERNATIONAL BUILDING CODE WITH LOCAL AMENDMENTS, NATIONAL ELECTRICAL CODE (NEC), INTERNATIONAL FIRE CODE (IFC), AND WASHINGTON STATE ENERGY CODE (WEC).
2. ELECTRICAL PERMITS TO BE APPLIED FOR UNDER SEPARATE APPLICATION BY CONTRACTOR.
3. PROVIDE FIREBLOCKS AND DRAFTSTOPS PER IBC.
4. PROVIDE CLOSURE MEETING THE REQUIREMENT OF GOVERNING FIRE AUTHORITIES BETWEEN FIRE RATED FLOORS, SHAFTS AND BUILDING PARTITIONS AND PENETRATING DUCTS, PIPES, CONDUIT, MECHANICAL, ELECTRICAL, AND OTHER ITEMS.
5. RECESSES LOCATED WITHIN FIRE RATED PARTITIONS SHALL BE CONSTRUCTED TO MAINTAIN THE REQUIRED FIRE RATING OF THE PARTITION.

HAZMAT:
1. HAZARDOUS MATERIAL REMOVAL & DISPOSAL: BEFORE BEGINNING ANY DEMOLITION OR OTHER WORK, COMPLY WITH DOCUMENTS PREPARED BY THE OWNER'S HAZARDOUS MATERIALS CONSULTANT. THIS APPLIES TO DEMOLITION, DISPOSAL AND CONSTRUCTION OPERATIONS ASSOCIATED WITH THE PROJECT. THE CONTRACTOR WILL SUSPEND WORK IMMEDIATELY AND NOTIFY THE OWNER IF MATERIALS SUSPECTED OF BEING HAZARDOUS, AND NOT PREVIOUSLY IDENTIFIED, ARE ENCOUNTERED IN THE COURSE OF THE CONTRACTOR'S WORK.

DEMOLITION:
1. WHERE ITEMS ARE INDICATED ON PLANS TO BE DEMOLISHED, IT SHALL MEAN THE COMPLETE REMOVAL AND DISPOSAL OF THE ITEM INDICATED UNLESS OTHERWISE NOTED. CONTRACTOR IS RESPONSIBLE FOR REVIEW OF THE HAZARDOUS MATERIALS ABATEMENT, ARCHITECTURAL, STRUCTURAL, MECHANICAL AND ELECTRICAL DRAWINGS AND SPECIFICATIONS FOR CUTTING AND PATCHING WORK.

DIMENSIONS:
1. DO NOT SCALE DRAWINGS.
2. VERIFY DIMENSIONS SHOWN ON DRAWINGS. USE ONLY DIMENSIONS INDICATED. PRIOR TO STARTING OR CONTINUING WORK, NOTIFY ARCHITECT OF DISCREPANCIES OR CONDITIONS INCONSISTENT WITH THE INTENT OF THE CONSTRUCTION DOCUMENTS.
3. DIMENSIONS ARE TO FACE OF CONCRETE, FACE OF MASONRY, OR FACE OF STUD, UNLESS OTHERWISE NOTED.
4. FINISHED SURFACE OF INFILL OR EXTENSIONS OF EXISTING PARTITIONS SHALL ALIGN WITH ADJACENT EXISTING SURFACES UNLESS OTHERWISE NOTED.
5. VERTICAL DIMENSIONS ARE MEASURED FROM STRUCTURAL SLAB, TOP OF STEEL OR TOP OF SHEATHING, UNLESS NOTED OTHERWISE.

COORDINATION:
1. COORDINATE ALL OPERATIONS WITH OWNER, SUCH AS AREAS USED FOR MATERIAL STORAGE, ACCESS TO AND FROM THE SITE, TIMING OF WORK AND REQUIREMENTS OF NOISE ORDINANCE. INSTALL DUST AND NOISE BARRIERS AS REQUIRED TO PROTECT EXISTING ADJACENT BUILDINGS AND OCCUPANTS AND TO MAINTAIN AN ENVIRONMENT SUITABLE TO PERMIT CONTINUED OCCUPANCY OF SUBJECT AND ADJACENT BUILDINGS.
2. REVIEW DEMOLITION DRAWINGS. PATCH AND REPAIR ALL EXISTING SURFACES AFFECTED BY DEMOLITION WORK.
3. VERIFY LOCATIONS OF EXISTING UTILITIES. CAP, MARK AND PROTECT AS NECESSARY TO COMPLETE THE WORK.
4. REVIEW ARCHITECTURAL, ELECTRICAL, & SECURITY DRAWINGS AND PROVIDE ROUGH-INS THROUGH SLABS, BEAMS, WALLS, CEILINGS, AND ROOFS FOR DUCTS, PIPES, CONDUITS, JUNCTION BOXES, CABINETS AND EQUIPMENT. VERIFY SIZE AND LOCATION BEFORE PROCEEDING WITH WORK. COORDINATE WITH INSTALLATION REQUIREMENTS. PATCH AND REPAIR EXISTING SURFACES AS NECESSARY TO COMPLETE WORK.
5. COORDINATE AND PROVIDE REQUIRED PENETRATIONS AND PATCHING WITH INDIVIDUAL SUBCONTRACTORS TO SUIT NEW WORK.
6. CONTRACTOR TO OBTAIN AND VERIFY ROUGH-IN DIMENSION REQUIREMENTS FOR CABINETRY, EQUIPMENT, ACCESSORIES AND THE LIKE INCLUDING THOSE DESIGNATED FOIC AND FOIO. CONTRACTOR TO PROVIDE BACKING, BLOCKING, SUPPORT AS REQUIRED FOR INSTALLATION. CONTRACTOR TO COORDINATE POWER, DATA, COMMUNICATIONS AND SECURITY REQUIREMENTS FOR FOIC AND FOIO EQUIPMENT WHERE SERVICES ARE REQUIRED. INCLUDE STUB OUTS AND CONNECTIONS. VERIFY AND COORDINATE DIMENSIONS OF FOIC AND FOIO ITEMS PRIOR TO PROCEEDING WITH WORK. INCLUDE STUB OUTS FOR FUTURE WORK.
7. CONDUITS SHALL BE CONCEALED IN WALLS, CHASES, ABOVE SUSPENDED CEILINGS, BELOW FLOORS OR BE FURRED-IN IN ROOMS WITH EXISTING CEILINGS, UNLESS OTHERWISE NOTED. DO NOT CONCEAL CONDUITS, ETC. IN ELECTRICAL, MECHANICAL, AND COMMUNICATION ROOMS.
8. CAREFULLY COORDINATE ELECTRICAL AND SECURITY INSTALLATIONS WITH EXISTING STRUCTURE AND BUILDING SYSTEMS.
9. "REMOVE" MEANS TO COMPLETELY AND PERMANENTLY REMOVE FROM THE PROJECT.
10. REFER TO ELECTRICAL DRAWINGS FOR ELECTRICAL DEVICES AND LOCATIONS. COORDINATE AND REVIEW DEVICE LOCATIONS WITH ARCHITECT IN FIELD PRIOR TO ROUGH-IN.

PROJECT INFORMATION

PROJECT OWNER:
UNIVERSITY OF WASHINGTON
4333 BROOKLYN AVE NE
BOX 359451
SEATTLE, WA 98195-9451

PROJECT MANAGER:
CHRIS SEVERNS

PROJECT ADDRESS:
KANE HALL
4069 SPOKANE LANE NE
SEATTLE, WA 98195

SCOPE DESCRIPTION:
ENHANCE THE EXISTING CAMPUS CAAMS SYSTEM TO ADD AND INTEGRATE ELECTRONIC ACCESS CONTROL AND LOCK-DOWN FUNCTIONALITY AT 67 EXISTING DOORS THROUGHOUT KANE HALL IN ACCORDANCE WITH UW CAMPUS STANDARDS. NO CHANGE TO EXISTING EMERGENCY EGRESS FUNCTION OR EXIT ACCESS TRAVEL DISTANCES

DESIGN TEAM

ARCHITECT:
SHKS ARCHITECTS
1050 NORTH 38TH ST
SEATTLE, WA 98103
TEL: 206.675.9151
CONTACT: SEAN KELLY
EMAIL: SEANK@SHKSARCHITECTS.COM

ELECTRICAL ENGINEER:
HARGIS ENGINEERS
1201 THIRD AVE, SUITE 600
TEL: 206.436.0466
CONTACT: PATRICK SHANNON
EMAIL: PATRICK.SHANNON@HARGIS.BIZ

COST CONSULTANT:
JMB CONSULTING GROUP LLC
4320 29TH AVENUE W
SEATTLE, WA 98199
TEL: 206.708.7280
CONTACT: JON BAYLES
EMAIL: JON.BAYLES@JMBCONSULTINGGROUP.COM

SECURITY INTEGRATION:
PAVION (RFI) ENGINEERS
800 SW 34TH ST. SUITE D
RENTON, WA 98057
TEL: (669) 333-6669
CONTACT: DAVE WOOD
EMAIL:DWOOD@RFI.COM

APPLICABLE CODES

2021 INTERNATIONAL BUILDING CODE
2010 ADA STANDARDS FOR ACCESSIBLE DESIGN
2017 ANSI A117.1
2021 WASHINGTON STATE ENERGY CODE
2021 INTERNATIONAL FIRE CODE
2020 NATIONAL ELECTRICAL CODE

VICINITY MAP

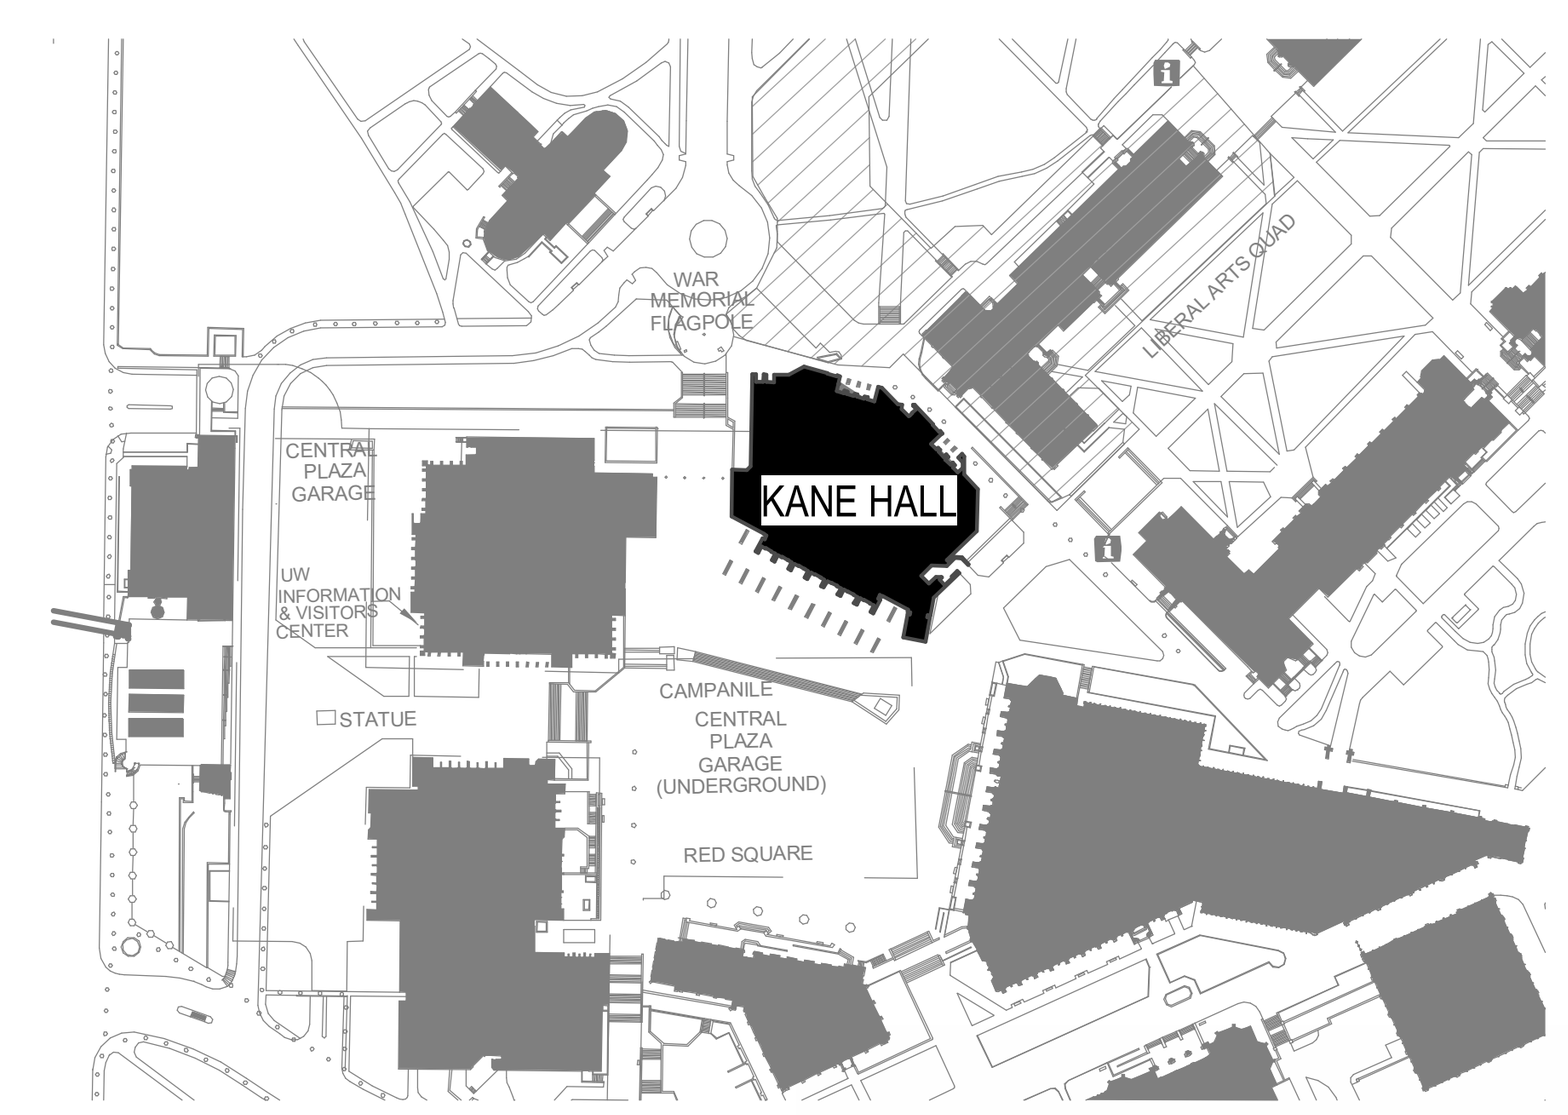

SHEET INDEX

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL
CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

COVER SHEET

SHEET No.

A0.0

4/14/2026 10:14:13 AM

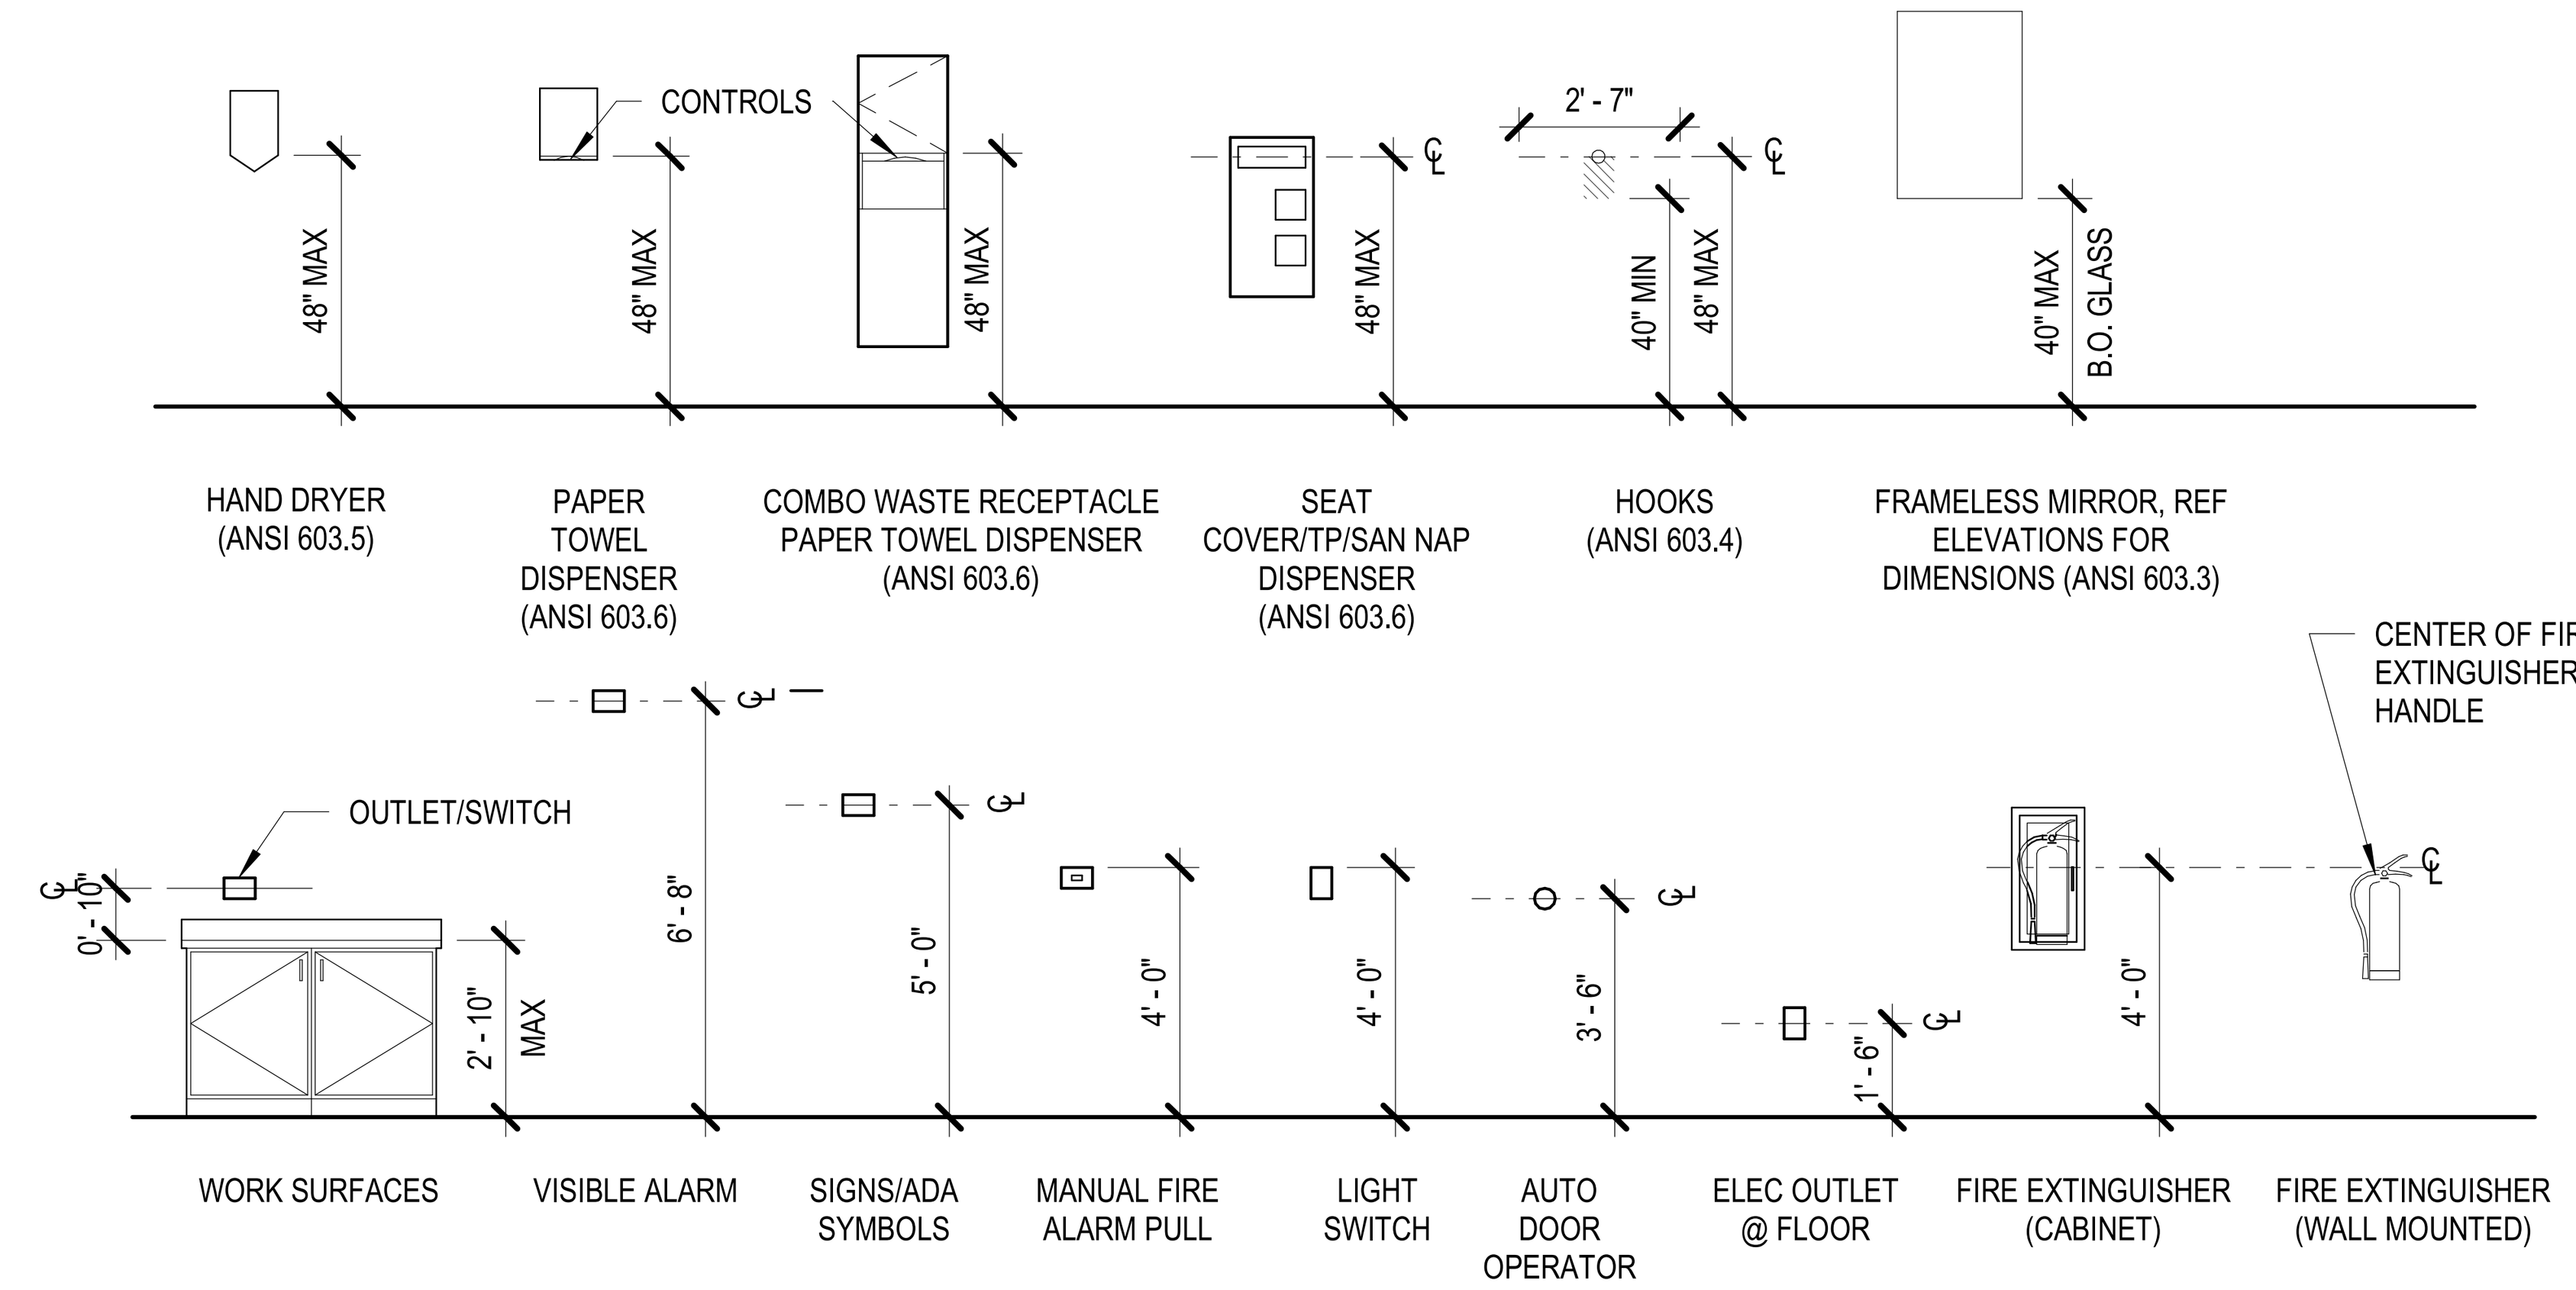

8 SIGNALS, OPERATORS, AND SURFACE HEIGHTS

SCALE: 1/4" = 1'-0"

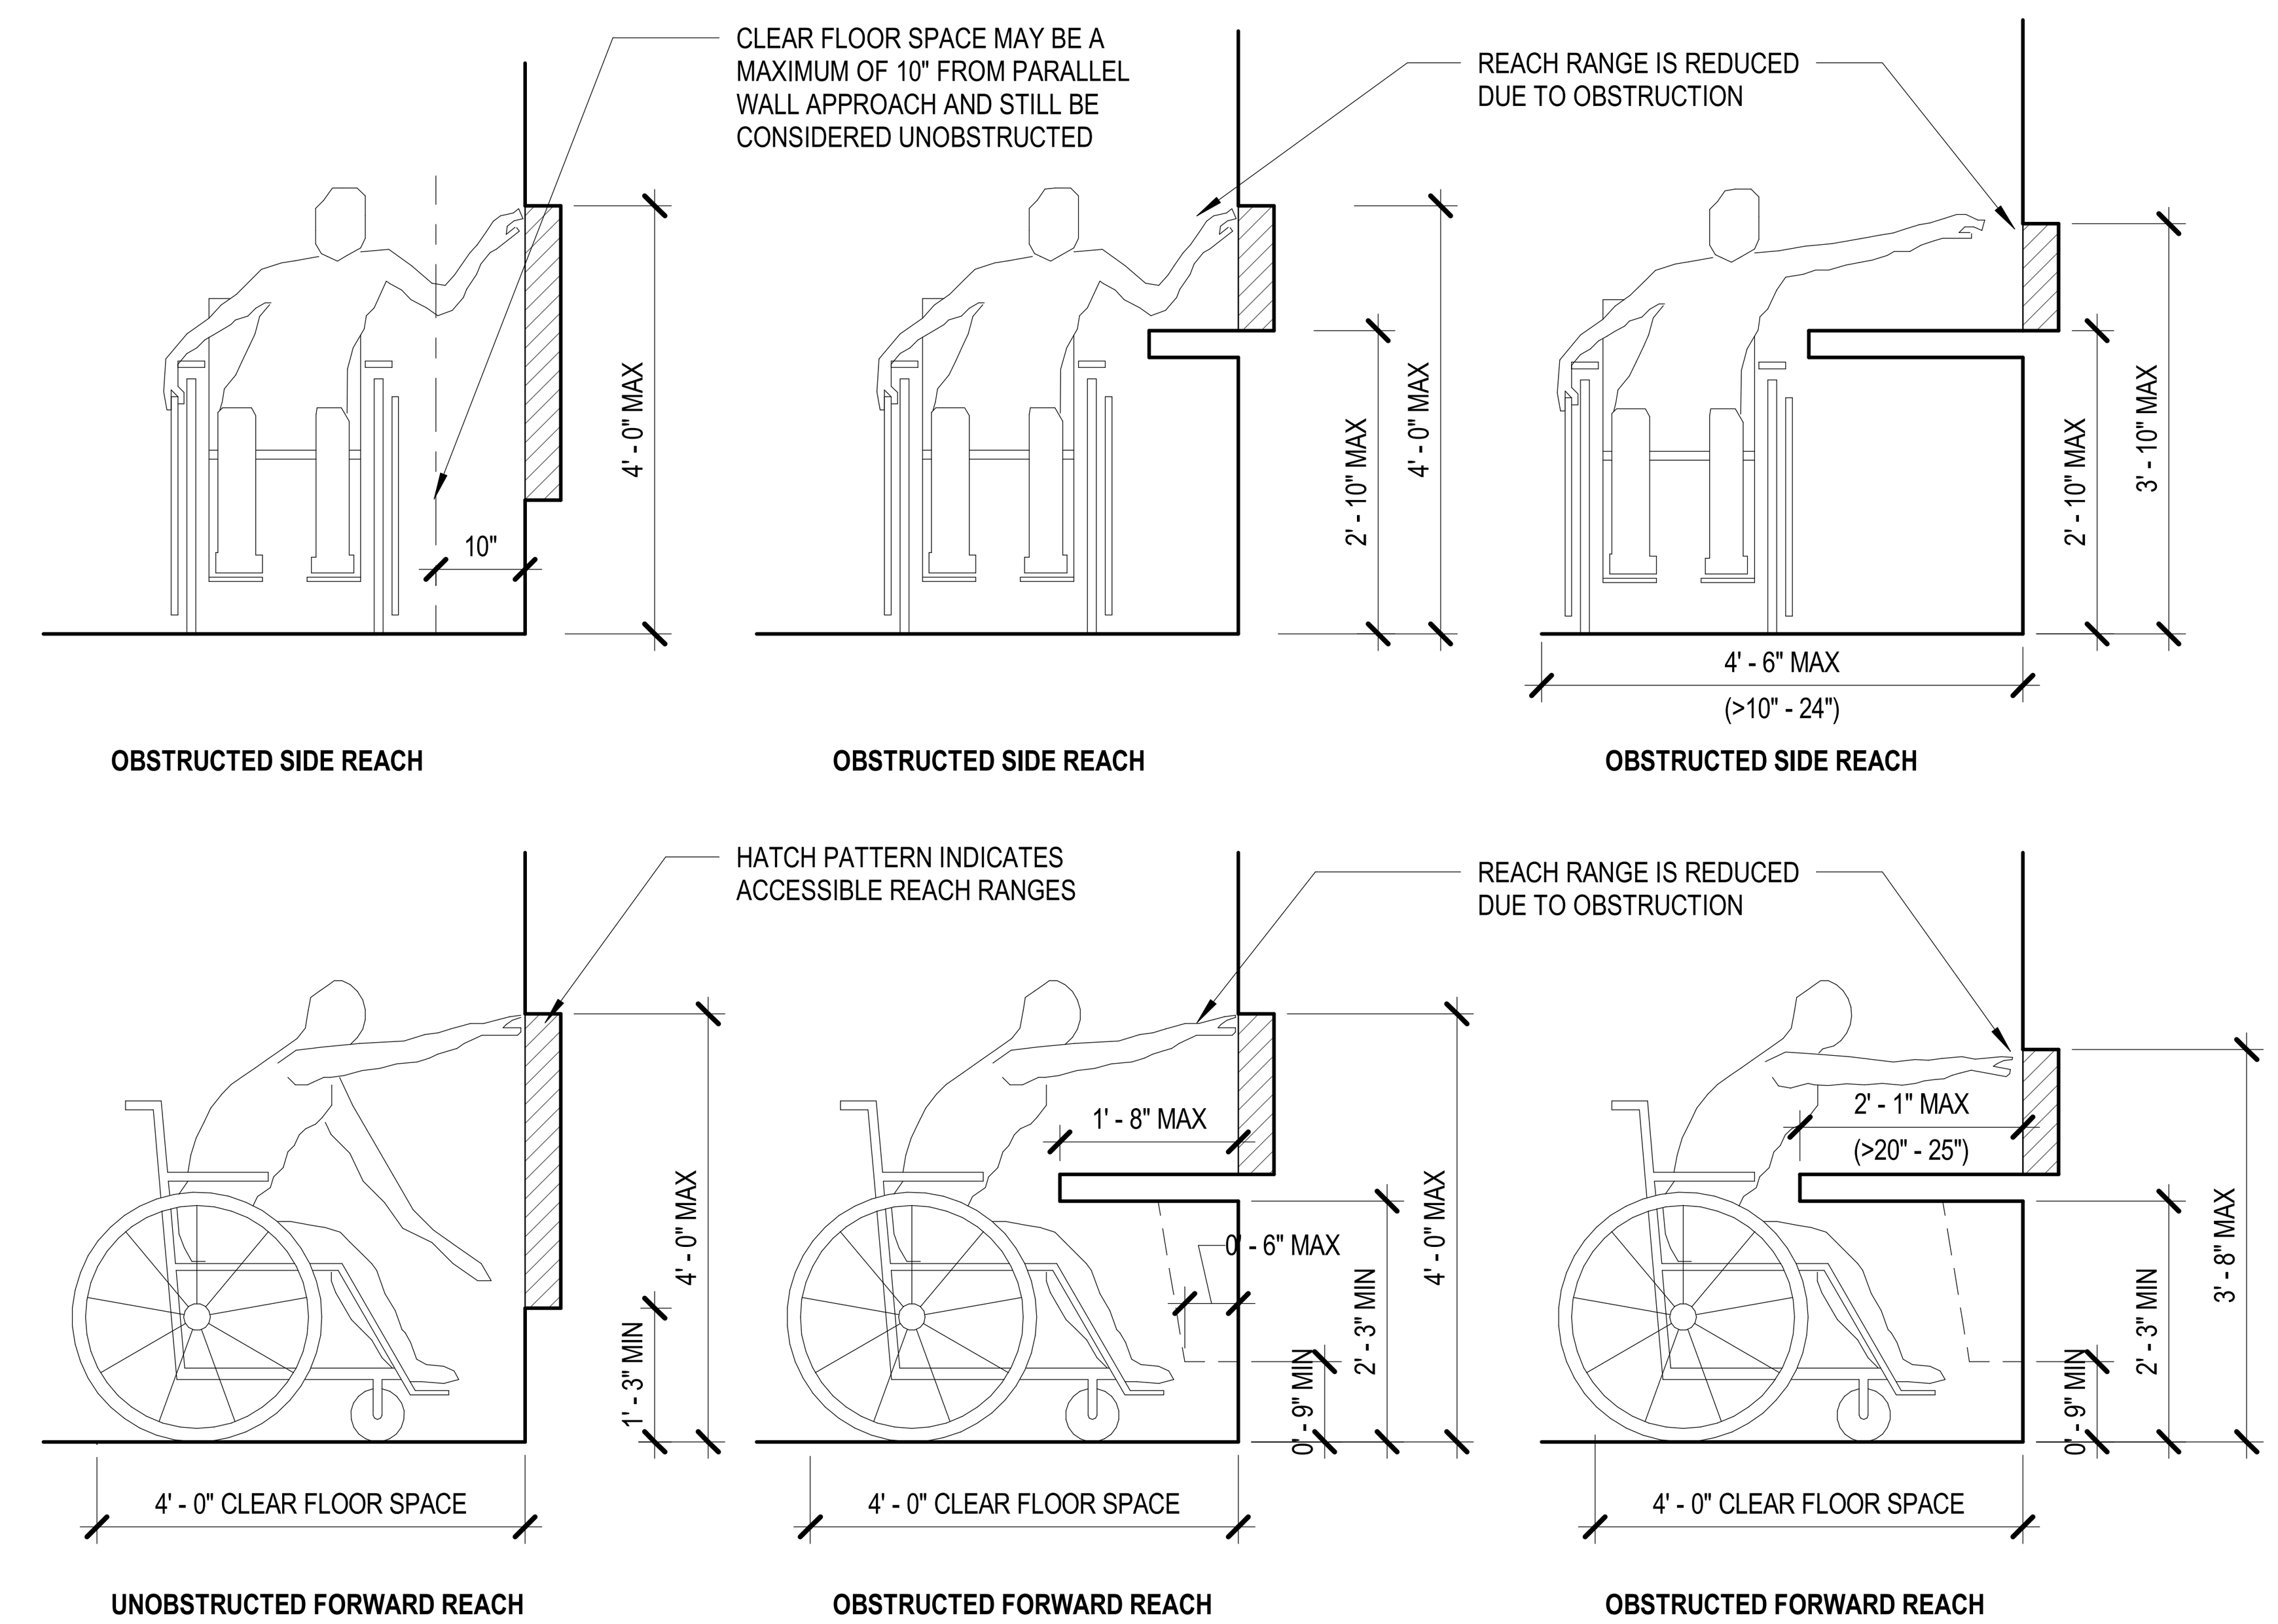

NOTE: EXISTING ELEMENTS SHALL BE PERMITTED AT 54" MAX ABOVE FINISHED FLOOR

18 REACH RANGE

SCALE: 1/2" = 1'-0"

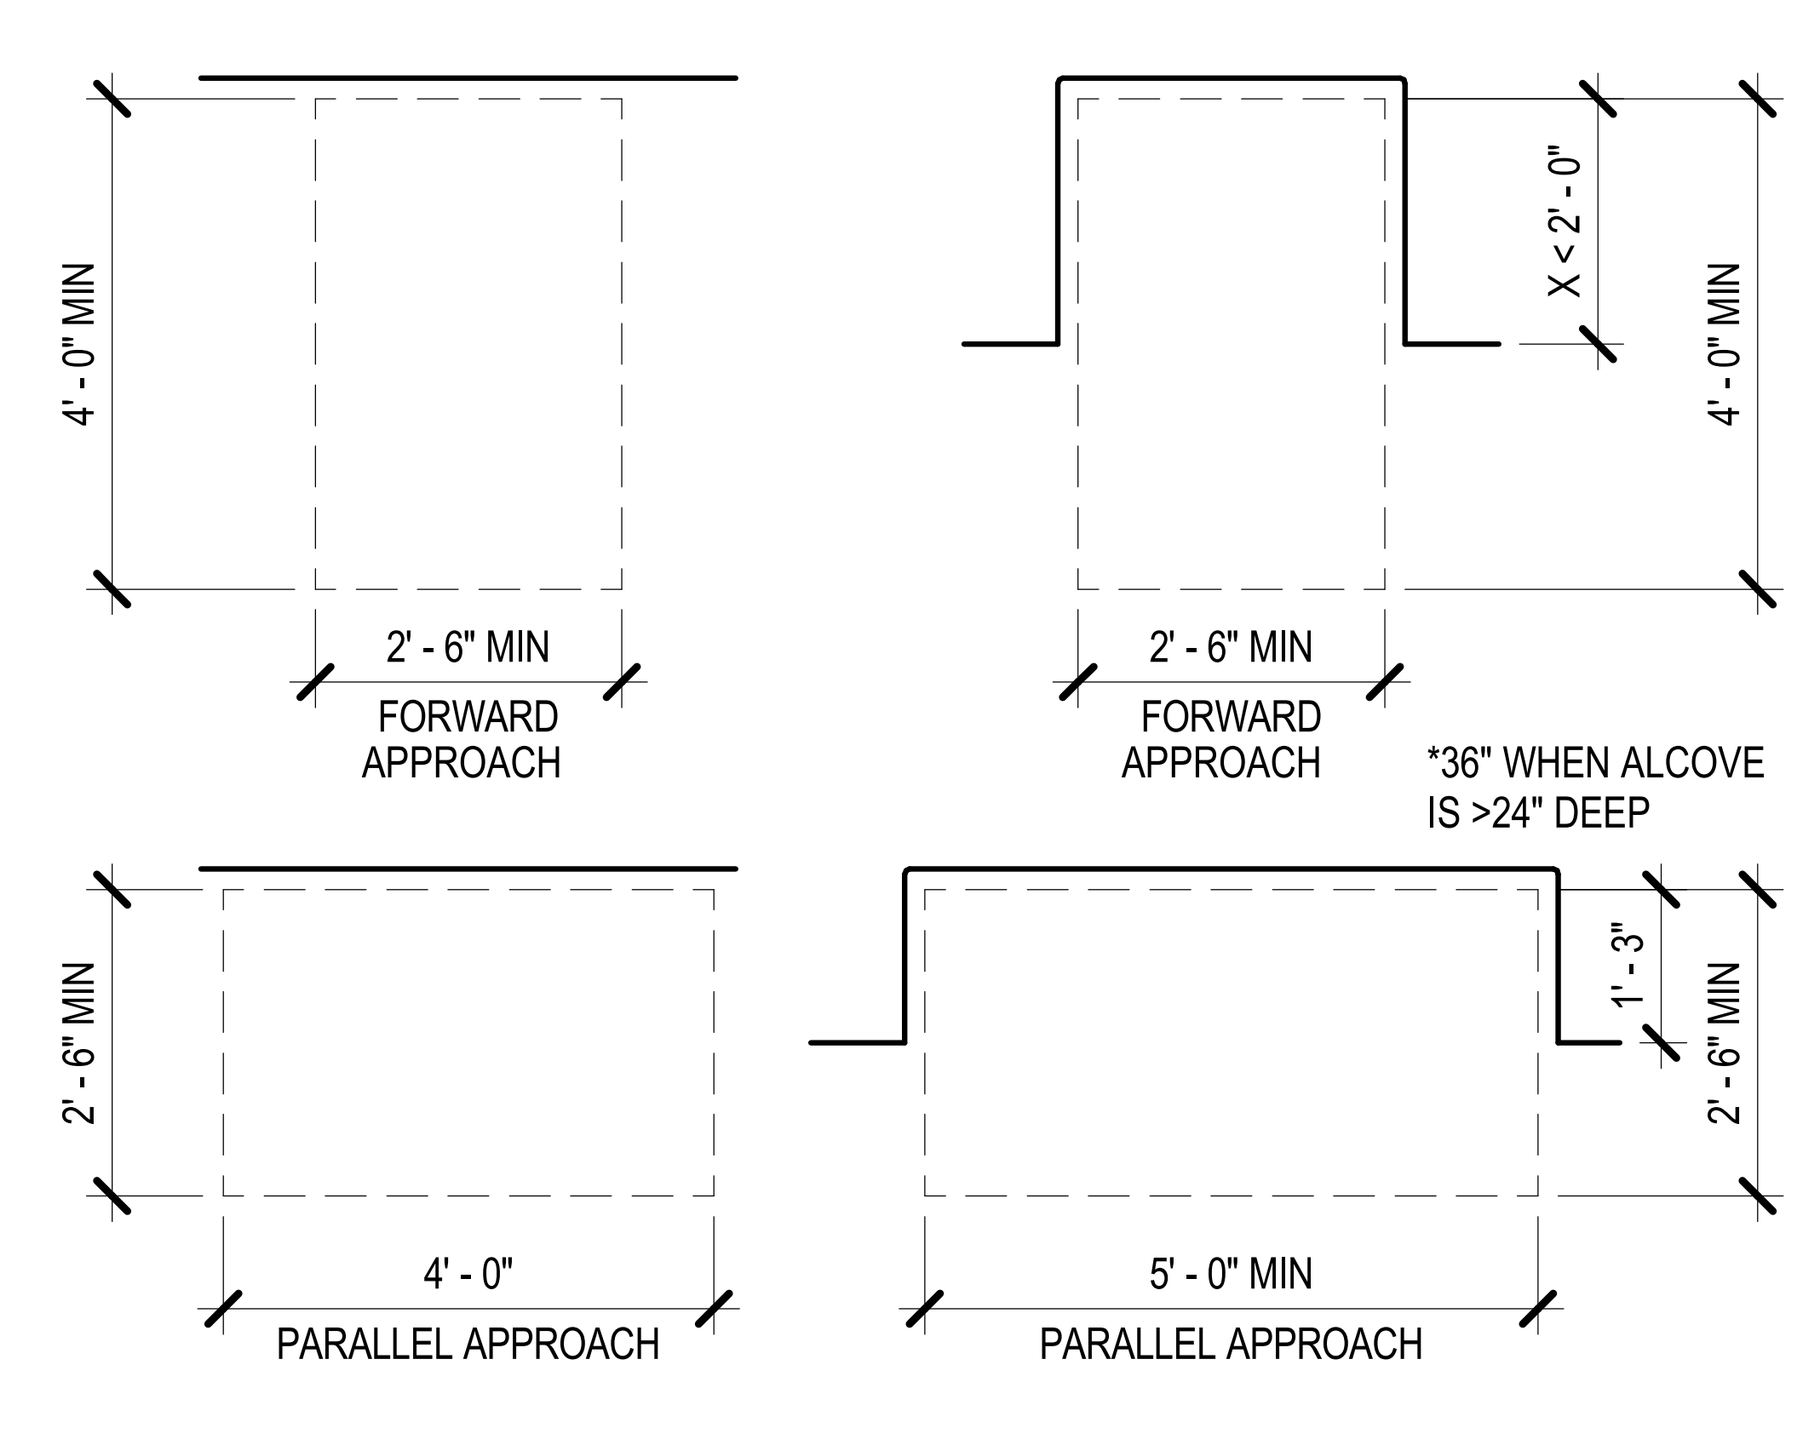

NOTE: ONE FULL, UNOBSTRUCTED SIDE OF THE CLEAR FLOOR SPACE SHALL ADJOIN OR OVERLAP AN ACCESSIBLE ROUTE OR ADJOIN ANOTHER CLEAR FLOOR SPACE. SECTION 305.6

7 CLEAR FLOOR SPACES

SCALE: 3/8" = 1'-0"

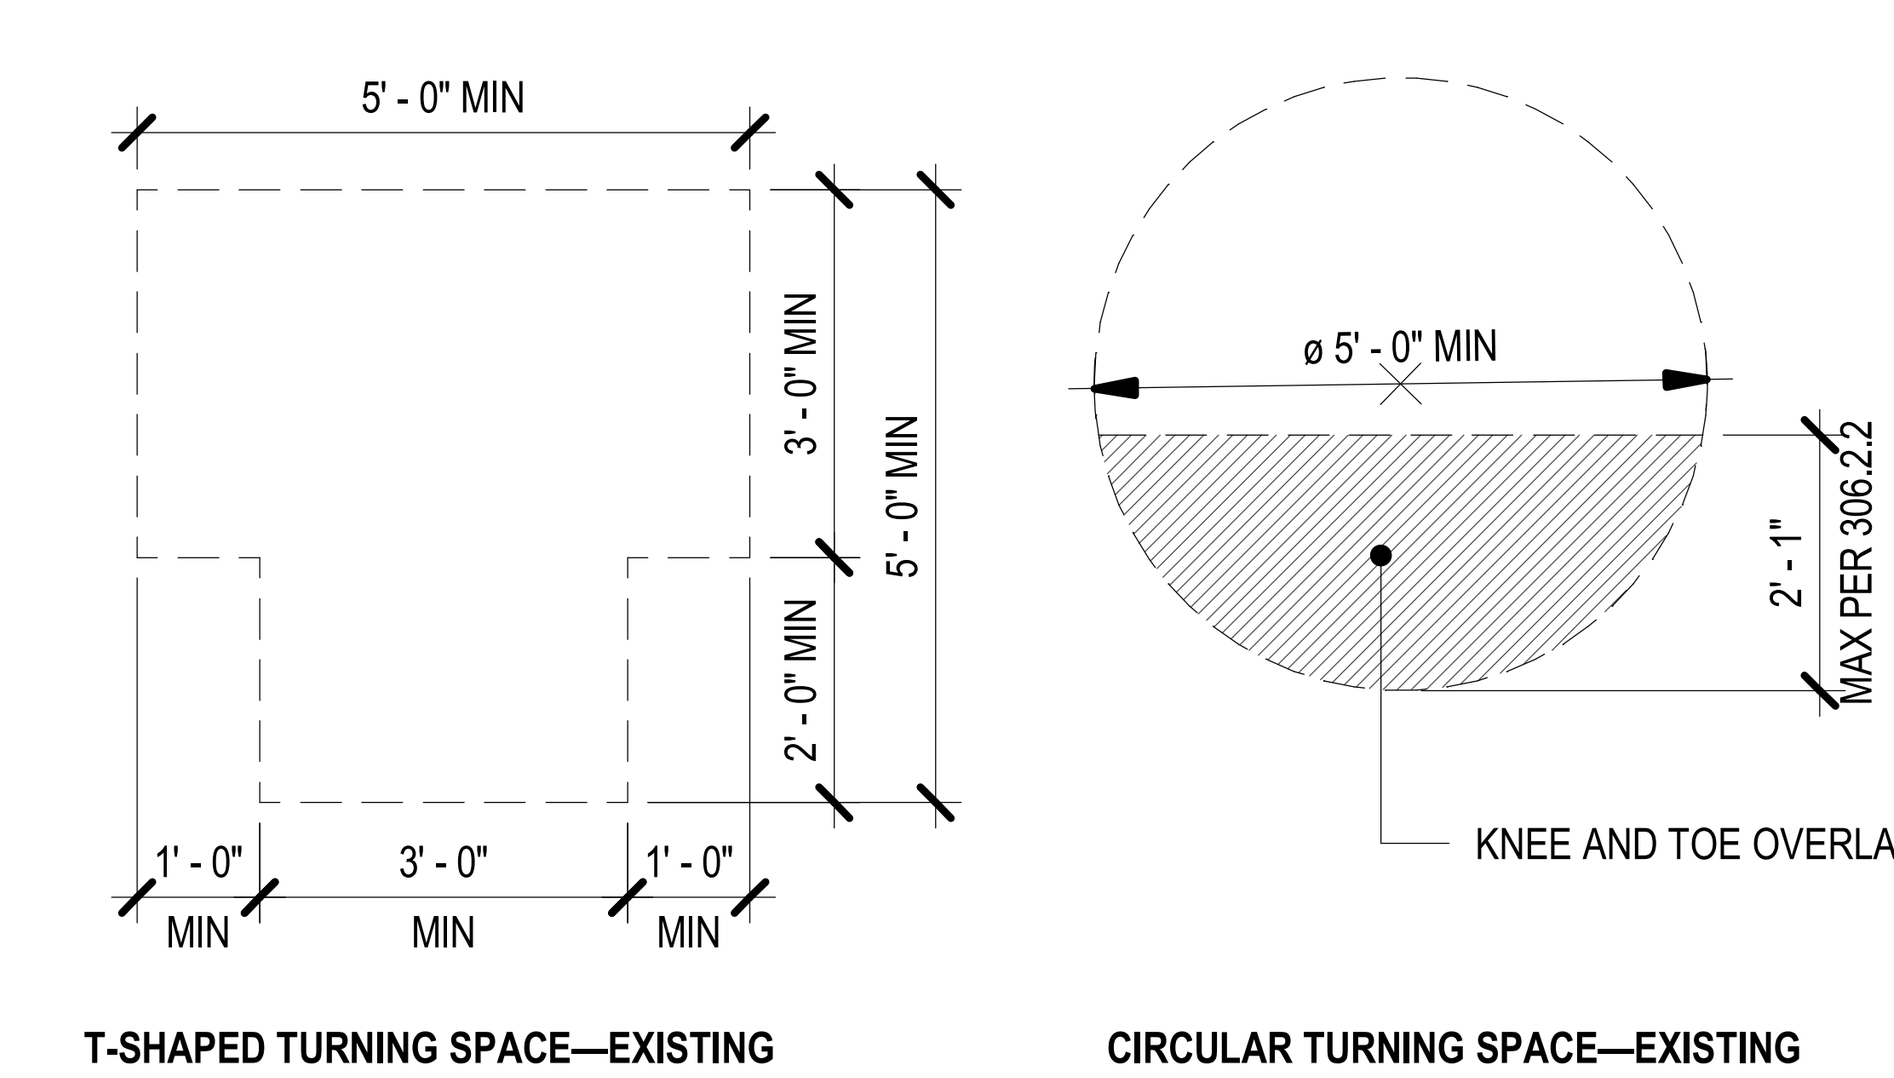

NOTES:
1. FLOOR SURFACES OF A TURNING SPACE SHALL HAVE A SLOPE NO STEEPER THAN 1:48
2. TURNING SPACES SHALL BE PERMITTED TO INCLUDE KNEE AND TOE CLEARANCES
3. UNLESS OTHERWISE SPECIFIED, DOORS SHALL BE PERMITTED TO SWING INTO THE TURNING SPACES

1 TURNING SPACE IN (E) BUILDINGS

SCALE: 3/8" = 1'-0"

ACCESSIBILITY NOTES:

A. GENERAL

1. BUILDINGS AND FACILITIES SHALL BE DESIGNED AND CONSTRUCTED TO BE ACCESSIBLE IN ACCORDANCE WITH THE IBC CHAPTER 11: ACCESSIBILITY AND ICC/ANSI A117.1-2009, AS AMENDED.
2. SCOPING: SITES, BUILDINGS, STRUCTURES, FACILITIES, ELEMENTS, AND SPACES, TEMPORARY OR PERMANENT, SHALL BE ACCESSIBLE TO PERSONS WITH PHYSICAL DISABILITIES (IBC 1103.1)
3. ACCESSIBLE MEANS OF EGRESS (IBC 1007): ACCESSIBLE SPACES SHALL BE PROVIDED WITH NOT LESS THAN ONE ACCESSIBLE MEANS OF EGRESS. WHERE MORE THAN ONE MEANS OF EGRESS ARE REQUIRED BY SECTION 1015.1 OR 1021.1 FROM ANY ACCESSIBLE SPACE, EACH ACCESSIBLE PORTION OF THE SPACE SHALL BE SERVED BY NOT LESS THAN TWO ACCESSIBLE MEANS OF EGRESS (IBC 1007.1). EACH REQUIRED ACCESSIBLE MEANS OF EGRESS SHALL BE CONTINUOUS TO A PUBLIC WAY AND SHALL CONSIST OF ONE OR MORE OF THE FOLLOWING COMPONENTS (IBC 1007.2):
   A. ACCESSIBLE ROUTE
   B. INTERIOR EXIT STAIRWAYS
   C. EXTERIOR EXIT STAIRWAYS
   D. ELEVATORS
   E. PLATFORM LIFTS
   F. HORIZONTAL EXITS
   G. RAMPS
   H. AREA OF REFUGE
   I. EXTERIOR AREA FOR ASSISTED RESCUE

6. SIGNAGE (IBC 1110): PROVIDE SIGNAGE, DIRECTIONAL SIGNAGE AND OTHER SIGNAGE AS REQUIRED BY IBC SECTIONS 1110.1, 1110.2 AND 1110.3 AND ICC/ANSI CH.7.
7. THE FOLLOWING NOTES ARE PROVIDED AS REFERENCE AND ARE NOT INTENDED TO REPLACE THE CODE. REFER TO THE REFERENCE CODES FOR COMPLETE TEXT AND FIGURES.

B. ACCESSIBLE ROUTE OF TRAVEL

1. ACCESSIBLE ROUTE (IBC 1104)
   A. SITE ARRIVAL POINTS (IBC 1104.1): ACCESSIBLE ROUTES WITHIN THE SITE SHALL BE PROVIDED FORM PUBLIC TRANSPORTATION STOPS; ACCESSIBLE PARKING, ACCESSIBLE PASSENGER LOADING ZONES AND PUBLIC STREETS OR SIDEWALKS TO THE ACCESSIBLE BUILDING ENTRANCE SERVED.
   B. WITHIN A SITE (IBC 1104.2): AT LEAST ONE ACCESSIBLE ROUTE SHALL CONNECT ACCESSIBLE BUILDINGS, ACCESSIBLE FACILITIES, ACCESSIBLE ELEMENTS, AND ACCESSIBLE SPACES THAT ARE ON THE SAME SITE.
   C. CONNECTED SPACES (IBC 1104.3): WHEN A BUILDING OR PORTION OF BUILDING IS REQUIRED TO BE ACCESSIBLE, AT LEAST ONE ACCESSIBLE ROUTE SHALL BE PROVIDED TO EACH PORTION OF THE BUILDING, TO ACCESSIBLE BUILDING ENTRANCES CONNECTING ACCESSIBLE PEDESTRIAN WALKWAYS AND THE PUBLIC WAY.
   D. LOCATION (IBC 1104.5): ACCESSIBLE ROUTES SHALL BE LOCATED IN THE SAME AREA AS GENERAL CIRCULATION PATH.
   E. ACCESSIBLE ENTRANCES (IBC 1105): 60% OF PUBLIC ENTRANCES ARE REQUIRED TO BE ACCESSIBLE.
   REFER TO THE ARCHITECTURAL SITE PLAN FOR DESIGNATED ACCESSIBLE ROUTES OF TRAVEL AND ACCESSIBLE ENTRANCES.
2. ACCESSIBLE ROUTES SHALL CONTAIN ONE OF MORE OF THE FOLLOWING COMPONENTS:
   A. WALKING SURFACE (ICC/ANSI 403):
      1. SLOPE: SHALL HAVE A RUNNING SLOPE NOT STEEPER THAN 1:20 (5%) AND CROSS SLOPE NOT STEEPER THAN 1:48 (2%).
      2. CLEAR WIDTH: THE MINIMUM CLEAR WIDTH OF AN ACCESSIBLE ROUTE OF TRAVEL SHALL BE 32" WIDTH FOR LENGTH </= 24" AND 36" WIDTH FOR >/=24". EXTERIOR ROUTES SHALL HAVE A CLEAR WIDTH OF 44" IBC 1101.2.2 (WA STATE AMENDMENT). WHERE AN ACCESSIBLE ROUTE INCLUDES A 180 DEGREE TURN AROUND AN OBJECT THAT IS LESS THAN 48 INCHES IN WIDTH, CLEAR WIDTHS SHALL BE 42 INCHES APPROACHING THE TURN, 48" MINIMUM DURING THE TURN, AND 42" LEAVING THE TURN. IF CLEAR WIDTH AT TURN IS 60" MINIMUM, 36" WIDE ROUTE IS ALLOWED.
      3. PASSING SPACE: AN ACCESSIBLE ROUTE WITH A CLEAR WIDTH LESS THAN 60" SHALL PROVIDE A 60" X 60" PASSING SPACE AT INTERVALS OF 200" MAXIMUM.
   B. DOORS AND DOORWAYS (ICC/ANSI 404):
      1. CLEAR WIDTH: DOORWAYS SHALL HAVE A CLEAR OPENING WIDTH OF 32" MINIMUM, MEASURED BETWEEN THE FACE OF THE DOOR AND THE STOP, WITH DOOR OPENED 90 DEGREES. OPENINGS WITHOUT DOORS MORE THAN 24" IN DEPTH SHALL PROVIDE A CLEAR WIDTH OF 36". THERE SHALL BE NO PROJECTIONS LOWER THAN 34". PROJECTIONS BETWEEN 34" AND 80" SHALL NOT EXCEED 4". (EXCEPTION DOOR CLOSERS AND STOPS ARE PERMITTED TO BE 78" ABOVE THE FLOOR.)
      2. MANEUVERING CLEARANCES AT DOORS: PER ICC/ANSI TABLE 404.2.4.1, FIGURE 404.2.4.1, FIGURE 404.2.4.2.
      3. THRESHOLDS: MAX. ½" IN HEIGHT, BEVELED NO STEEPER THAN 1:2.
      4. TWO DOORS IN SERIES: 48" MIN + DOOR WIDTH OPENING INTO SPACE. SPACE BETWEEN DOORS TO PROVIDE A 60" TURNING SPACE.
      5. REFER TO DOOR SCHEDULE NOTES FOR ACCESSIBLE REQUIREMENTS FOR DOOR HARDWARE, CLOSING SPEED, DOOR-OPENING FORCE, DOOR SURFACE AND VISION LITES.
   C. RAMPS (ICC/ANSI 405):
      1. SLOPE: MAX. RUNNING SLOPE NOT STEEPER THAN 1:12 (8.33%) AND CROSS SLOPE NOT STEEPER THAN 1:48 (2%).
      2. CLEAR WIDTH: 36" MIN. CLEAR BETWEEN HANDRAILS (44" MIN. AT EXTERIOR ROUTES OF TRAVEL).
      3. RISE: 30" MAXIMUM
      4. LANDINGS: REQUIRED AT TOP AND BOTTOM OF EACH RAMP. MAX. 1:48 SLOPE. CLEAR WIDTH OF LANDING AT LEAST AS WIDE AS RAMP AND 60" IN LENGTH. WHERE RAMP CHANGES DIRECTION MUST PROVIDE A 60" TURNING SPACE.
      5. HANDRAILS: RAMPS WITH RISE GREATER THAN 6" ARE REQUIRED TO HAVE HANDRAILS ON EACH SIDE.
      6. EDGE PROTECTION: WHEN REQUIRED, PROVIDE ON EACH SIDE OF RAMP RUNS AND RAMP LANDINGS BY EITHER A 12" EXTENDED FLOOR SURFACE PAST THE INSIDE FACE OF RAILING OR BY CURB OR BARRIER WITHIN 4" OF THE FLOOR.
   D. CURB RAMPS TO COMPLY WITH ICC/ANSI 406
   E. ELEVATORS (ICC/ANSI 407): REFER TO ENLARGED ELEVATOR PLAN & ELEVATION SHEET G-506 FOR ACCESSIBLE ELEVATOR REQUIREMENTS.

E. COMMUNICATION FEATURES

1. ALARMS (ICC/ANSI 702): PROVIDE ACCESSIBLE AUDIBLE AND VISUAL AND NOTIFICATION APPLIANCES INSTALLED IN ACCORDANCE WITH NFPA 72, POWERED BY A COMMERCIAL LIGHT AND POWER SOURCE, BE PERMANENTLY INSTALLED AND CONNECTED TO THE WIRING OF THE PREMISES ELECTRIC SYSTEM.
2. SIGNAGE (ICC/ANSI 703): INTERIOR AND EXTERIOR SIGNS IDENTIFYING PERMANENT ROOMS AND SPACES SHALL BE TACTILE. (IBC 2012 APPENDIX E107.2) TACTILE CHARACTER SHALL BE DUPLICATED IN BRAILLE. SIGNAGE SHALL COMPLY WITH ICC/ANSI SECTION 703.
3. TWO-WAY COMMUNICATION (IBC APPENDIX E105.6): WHERE TWO-WAY COMMUNICATION SYSTEMS ARE PROVIDED TO GAIN ADMITTANCE TO THE BUILDING, THE SYSTEM SHALL COMPLY WITH ICC/ANSI 708.

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

ACCESSIBILITY - GENERAL NOTES AND DETAILS

SHEET No.

A0.1

4/14/2026 10:14:14 AM

DOOR AND HARDWARE NOTES

1. IF PROVIDED, THRESHOLDS AT DOORWAYS SHALL BE 1/2" MAX IN HEIGHT. RAISED THRESHOLDS AND CHANGES IN LEVEL AT DOORWAYS SHALL COMPLY WITH FLOORS SURFACE & LEVEL CHANGE REQUIREMENTS. THIS REQUIREMENT SHALL NOT APPLY TO EXISTING OR ALTERED THRESHOLDS 3/4" MAX HIGH WITH A BEVELED EDGE EACH SIDE WITH A MAX SLOP OF 1:2 FOR THE HEIGHT EXCEEDING 1/4".
2. OPERABLE PARTS ON ACCESSIBLE DOORS SHALL HAVE A SHAPE THAT IS EASY TO GRASP WITH ONE HAND & DOES NOT REQUIRE TIGHT GRASPING, PINCHING, OR TWISTING OF THE WRIST TO OPERATE
3. OPERABLE PARTS SHALL BE MOUNTED 34" MIN/48" MAX AFF.
4. OPERATING HARDWARE FOR SLIDING DOORS SHALL BE EXPOSED & USABLE FROM BOTH SIDES WHEN THE DOOR IS FULLY OPEN.
5. LOCKS USED ONLY FOR SECURITY & NOT USED FOR NORMAL OPERATION ARE PERMITTED IN ANY LOCATION.
6. DOOR CLOSERS SHALL BE ADJUSTED SO THAT FROM AN OPEN 90 DEG, THE TIME REQUIRED TO MOVE A DOOR TO AN OPEN POSITION OF 12 DEG SHALL BE 5 SECONDS MIN..
7. DOOR SPRING HINGES SHALL BE ADJUSTED SO THAT FROM AN OPEN 70 DEG, THE DOOR SHALL MOVE TO THE CLOSED POSITION IN 1.5 SECONDS MIN.
8. FIRE DOORS SHALL HAVE A MIN. OPENING FORCE PER THE APPROPRIATE ADMIN. AUTHORITY. THE FORCE FOR PUSHING, PULLING OR SLIDING OPEN OTHER DOORS SHALL BE 5 LB. MAX. THIS DOES NOT APPLY TO FORCE REQUIRED TO RETRACT LATCH BOLTS OR DISENGAGE OTHER DEVICES THAT HOLD THE DOOR IN A CLOSED POSITION. WASHINGTON STATE ALLOWS A 10 LB. MAX FORCE FOR EXTERIOR DOORS PER WAC 51-50-1101.2.3.
9. CLOSETS DEEPER THAN 24" REQUIRE USER PASSAGE (32" CLR AT TYPE A UNITS AND 31 3/4" CLR AT TYPE B UNITS).

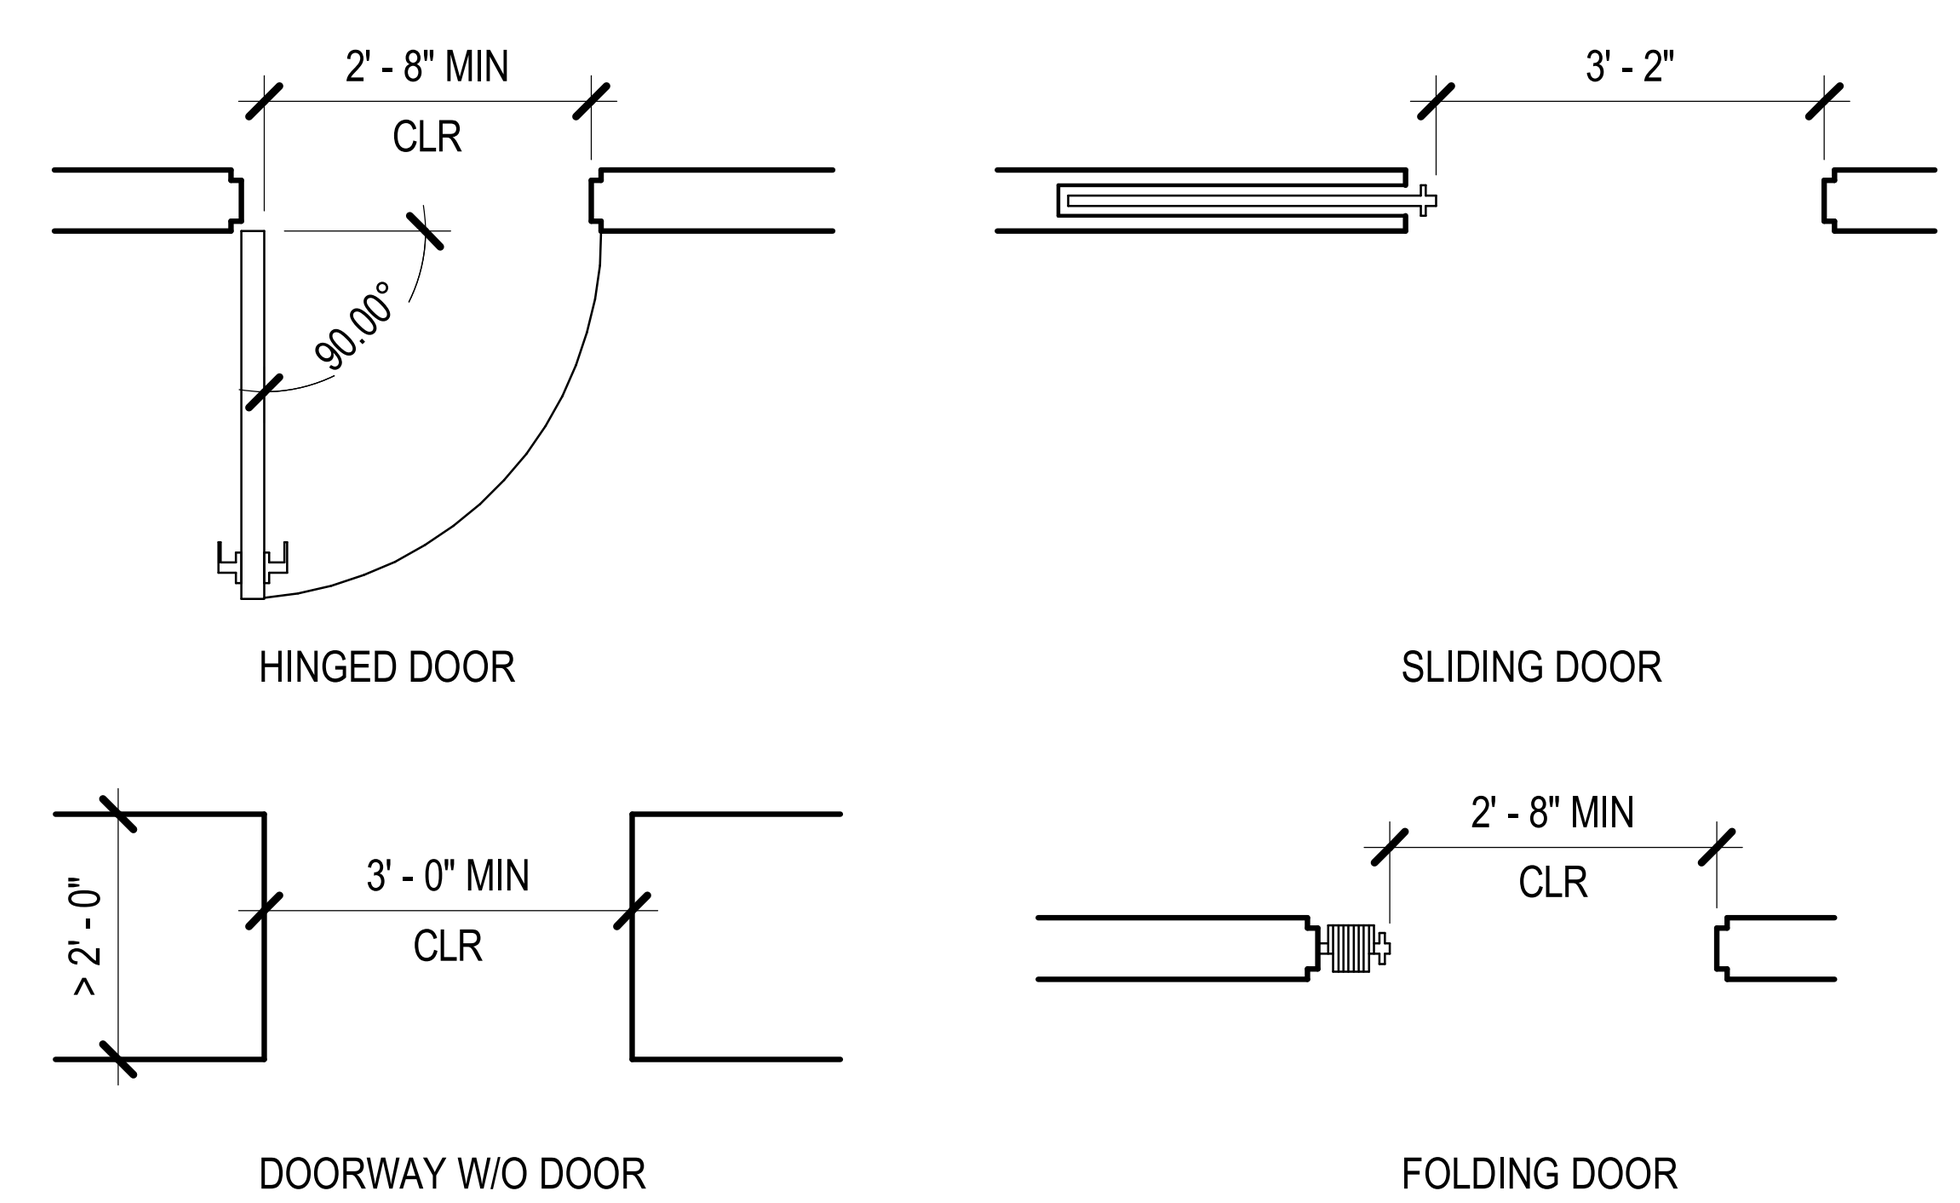

NOTES:
1. THERE SHALL BE NO PROJECTIONS INTO CLEAR OPENING WIDTH LOWER THAN 34" ABOVE FLOOR. PROJECTIONS INTO CLEAR OPENING WIDTH BETWEEN 34" & 80" A.F.F. SHALL NOT EXCEED 4".
2. DOOR CLOSER AND STOPS SHALL BE PERMITTED TO BE 78" MIN. A.F.F.
3. IN ALTERATIONS, A PROJECTION OF 5/8" MAX. INTO THE REQUIRED CLR. OPENING WIDTH SHALL BE PERMITTED FOR THE LATCH SIDE STOP
4. PRIOR TO OCCUPANCY, CONTRACTOR SHALL FIELD VERIFY THAT EVERY 2'-10" DOOR MEETS CLEARANCE REQUIREMENT.

1 CLEAR WIDTH OF DOORWAYS
SCALE: 3/8" = 1'-0"

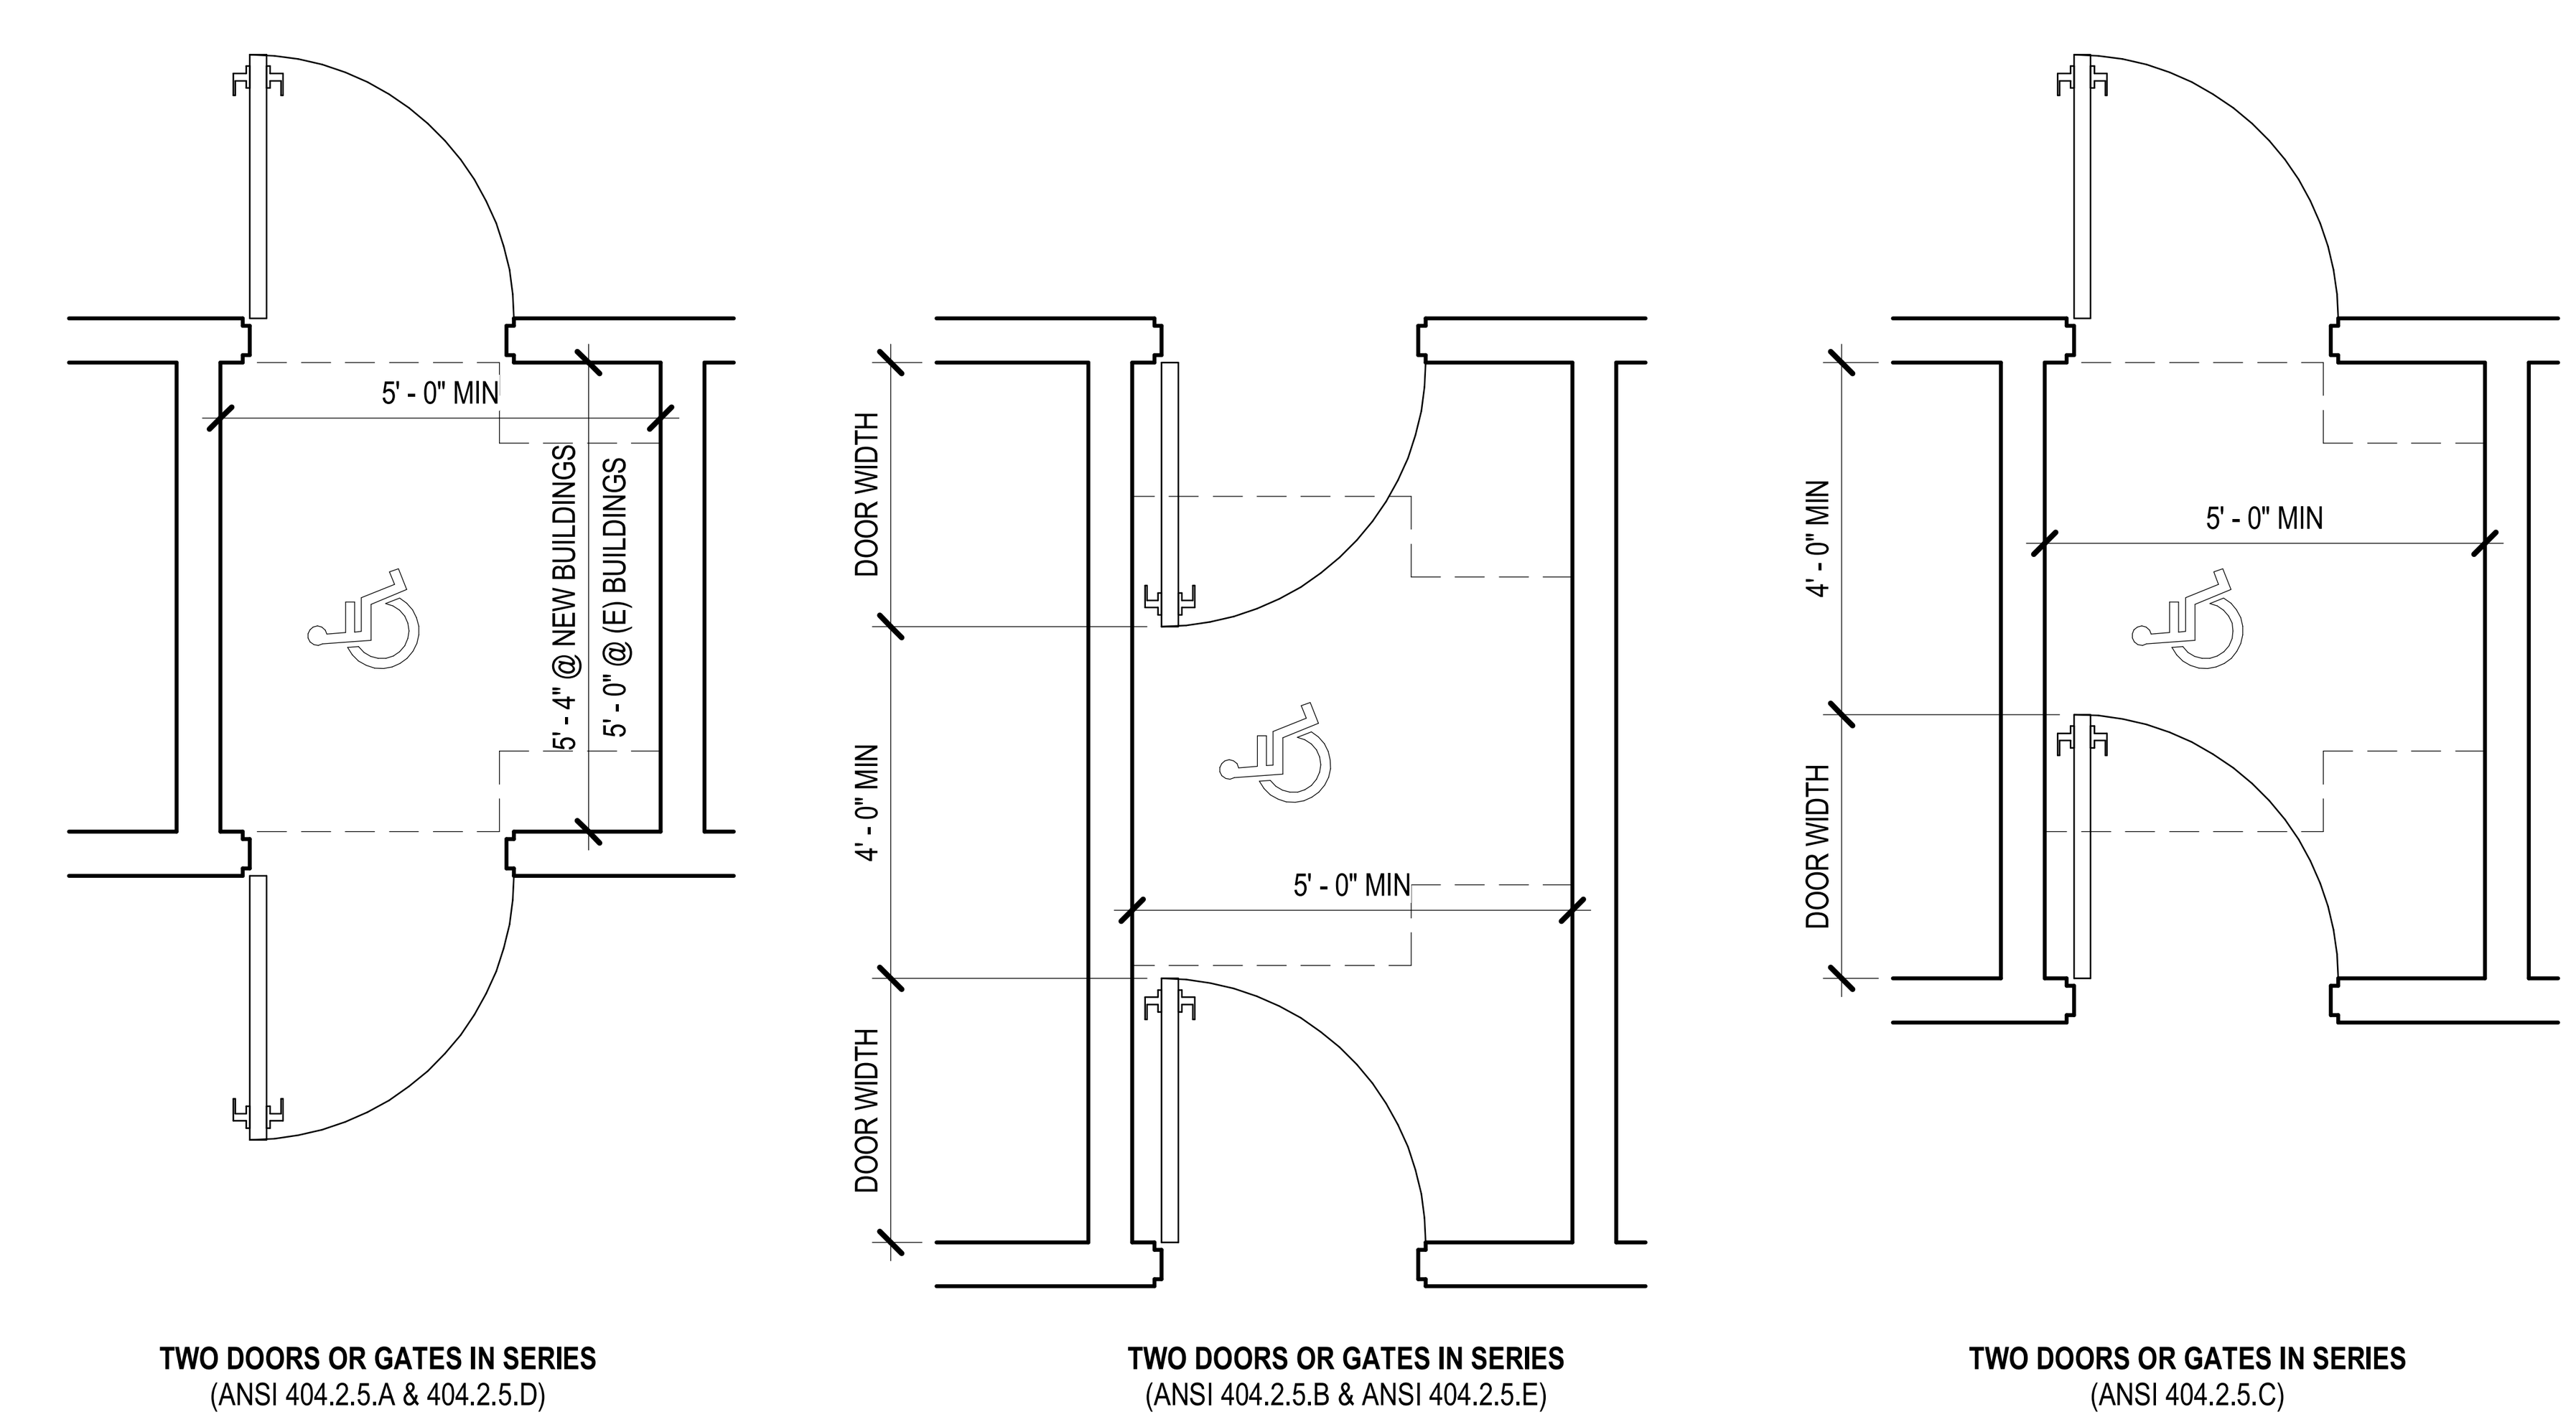

11 TWO DOORS IN A SERIES
SCALE: 3/8" = 1'-0"

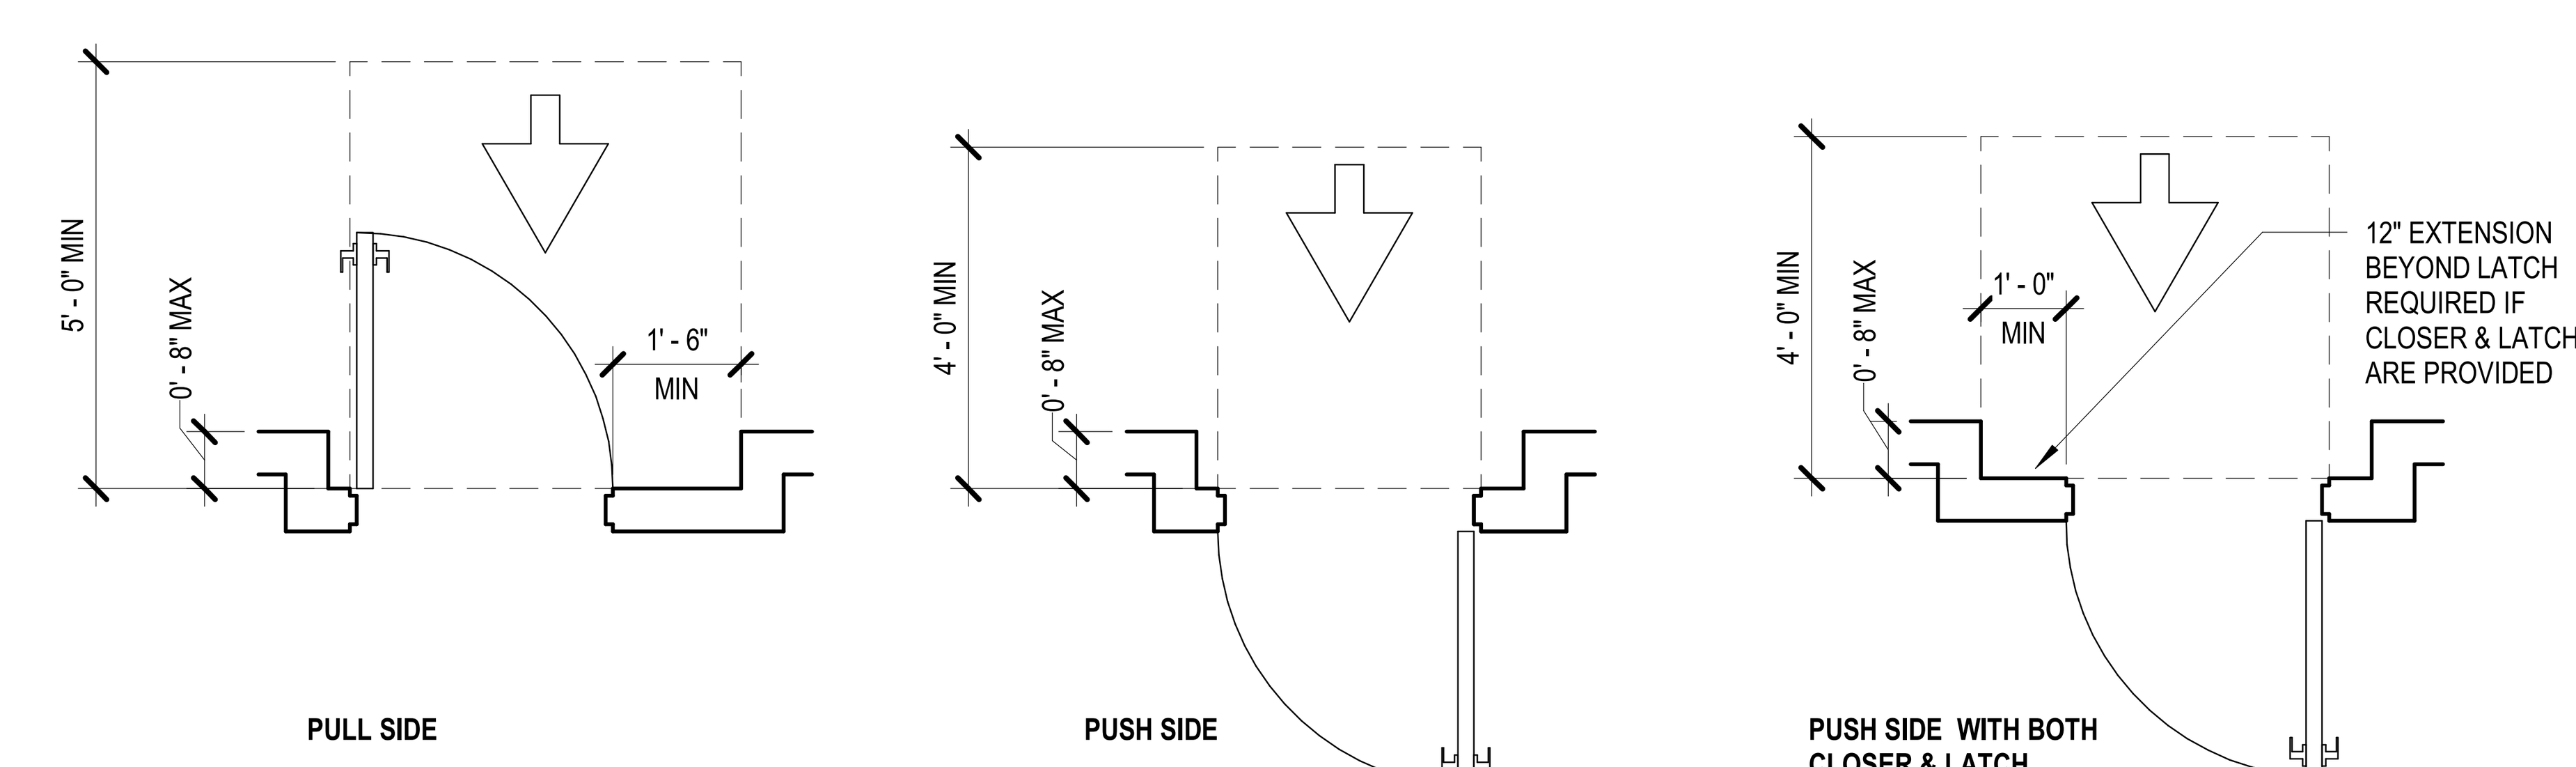

13 RECESSED DOORS
SCALE: 3/8" = 1'-0"

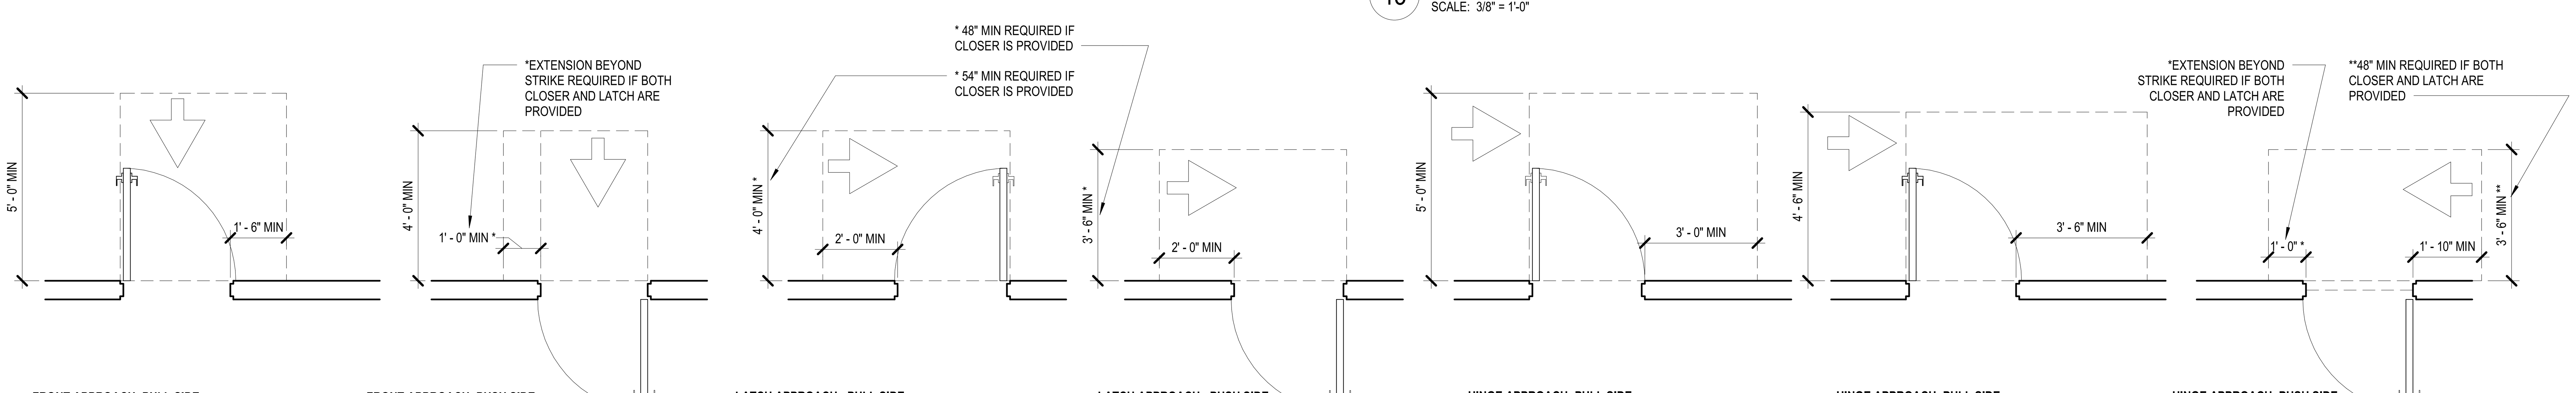

16 MANUEVERING CLEARANCES AT MANUALLY SWINGING DOORS
SCALE: 3/8" = 1'-0"

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL
CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

ACCESSIBILITY - DOORS

SHEET No.

A0.2

4/14/2026 10:14:14 AM

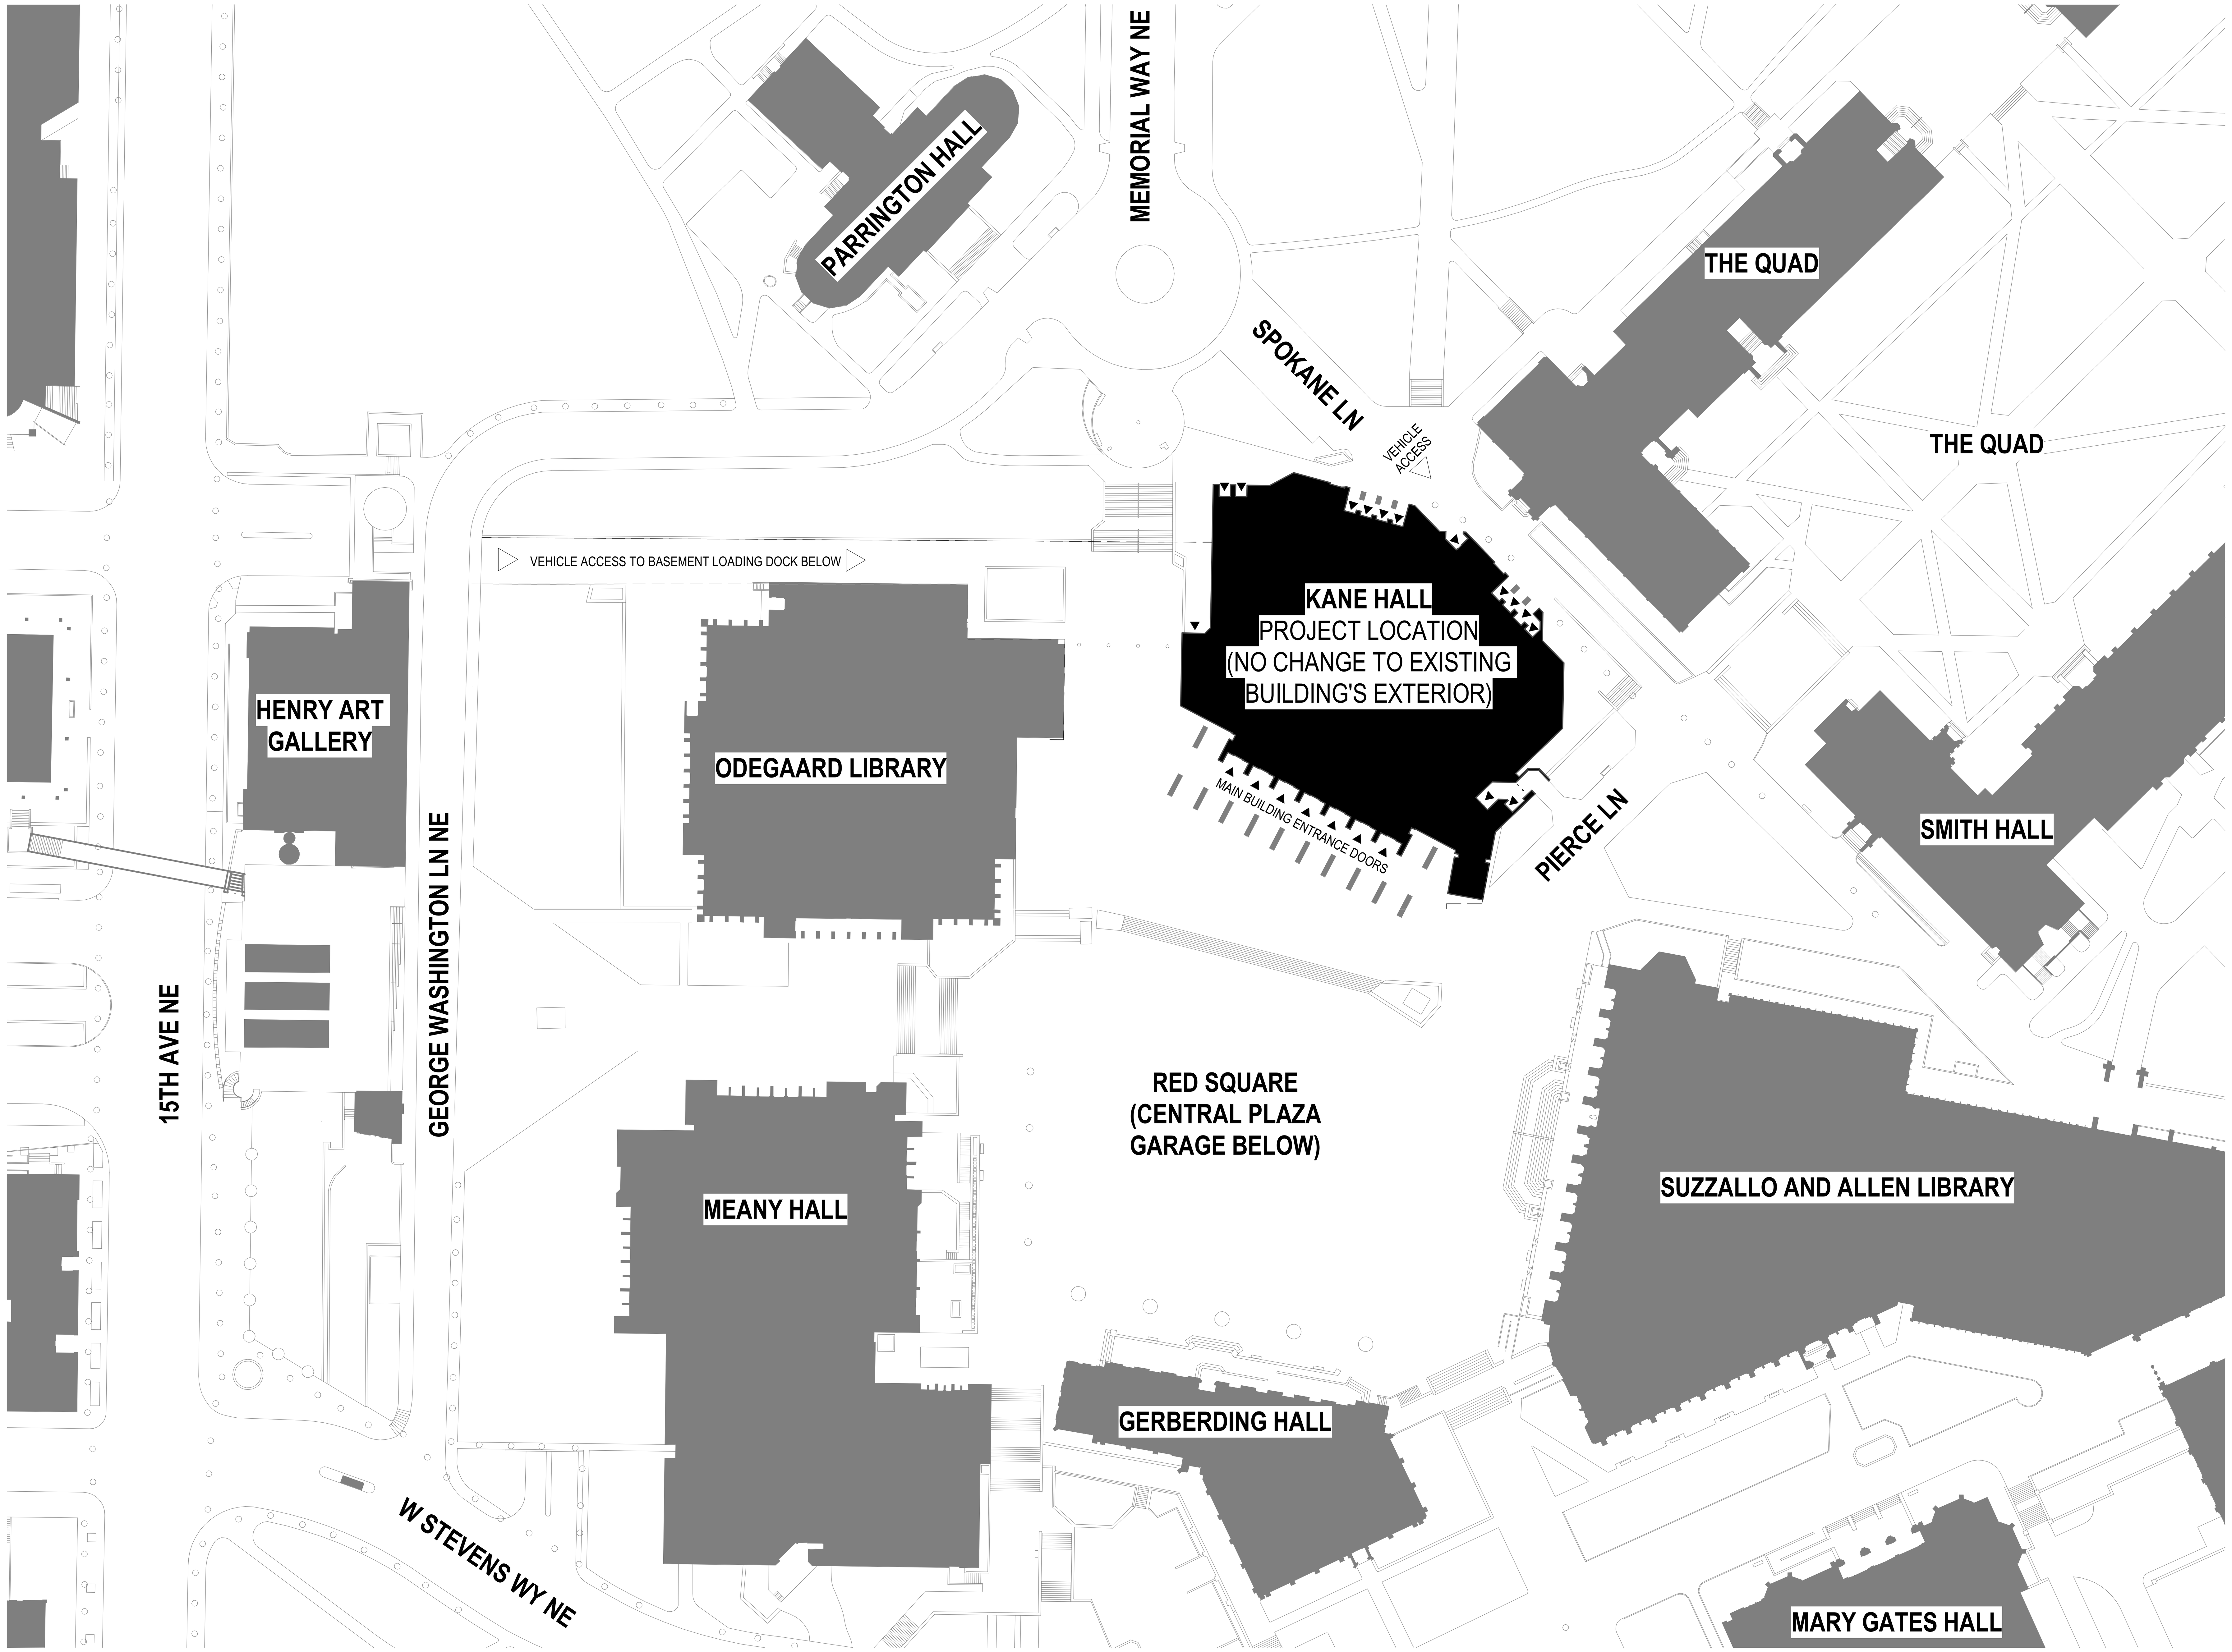

1 SITE PLAN

SCALE: 1" = 60'-0"

0 15' 30' 60' 120'

SITE PLAN LEGEND

(E) BUILDING NO CHANGE

VEHICLE ENTRANCE

BUILDING ENTRANCE

PROJECT INFORMATION

PROJECT OWNER:
UNIVERSITY OF WASHINGTON
4333 BROOKLYN AVE NE
BOX 359451
SEATTLE, WA 98195-9451

PROJECT MANAGER:
JENNIFER REYNOLDS

PROJECT ADDRESS:
KANE HALL
4069 SPOKANE LANE NE
SEATTLE, WA 98195

SCOPE DESCRIPTION:
ENHANCE THE EXISTING CAMPUS CAAMS SYSTEM TO ADD AND INTEGRATE ELECTRONIC ACCESS CONTROL AND LOCK-DOWN FUNCTIONALITY AT 67 EXISTING DOORS THROUGHOUT KANE HALL IN ACCORDANCE WITH UW CAMPUS STANDARDS

1. **PROJECT ADDRESS:**
   4000 15TH AVENUE NE (CENTRAL CAMPUS)
2. **PARCEL NUMBER(S):**
   PORTION OF 1625049001
3. **LEGAL DESCRIPTION:**
   THOSE PORTIONS OF GOVERNMENT LOTS 2-4, LYING WEST OF MONTLAKE BLVD NE, NORTH OF NE PACIFIC ST AND NORTH OF NE PACIFIC PLACE; THE WEST 1/2 OF THE NW 1/4 OF THE NW 1/4 OF THE SW 1/4 LYING EAST OF 15TH AVE NE AND SOUTH OF NE 45TH ST AND NORTH OF NE PACIFIC ST; ALL IN SECTION 16, TOWNSHIP 25 N, RANGE 4 E, W.M.

   APN #162504-9001

4. **LOT AREA:** N/A, NO CHANGE
5. **ZONE:** MIO-105-MR
6. **CURRENT USE:** A-3 (KANE HALL)
7. **PROPOSED USE: NO CHANGE**
8. **YEAR BUILT:** 1970
9. **(E) BLDG AREA:** N/A, NO CHANGE
10. **PROPOSED BLDG AREA**: N/A, NO CHANGE
11. **HT LIMIT:** N/A, NO CHANGE
12. **REQUIRED SETBACKS:**
    FRONT: N/A, NO CHANGE
    SIDE: N/A, NO CHANGE
    REAR: N/A, NO CHANGE
13. **LOT COVERAGE:** N/A, NO CHANGE
14. **(E) IMPERVIOUS SURFACE:** N/A, NO CHANGE
15. **PROPOSED IMPERVIOUS SURFACE**: N/A, NO CHANGE

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL
CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

SITE PLAN

SHEET No.

A1.0

4/14/2026 10:14:15 AM

CONCEALED SYSTEMS LEGEND

CONCEAL CONDUITS, BOXES, AND EQUIPMENT UNLESS NOTED OTHERWISE:

LOCATIONS WHERE IT'S ACCEPTABLE TO SURFACE MOUNT (EXPOSE) CONDUITS, BOXES, AND EQUIPMENT

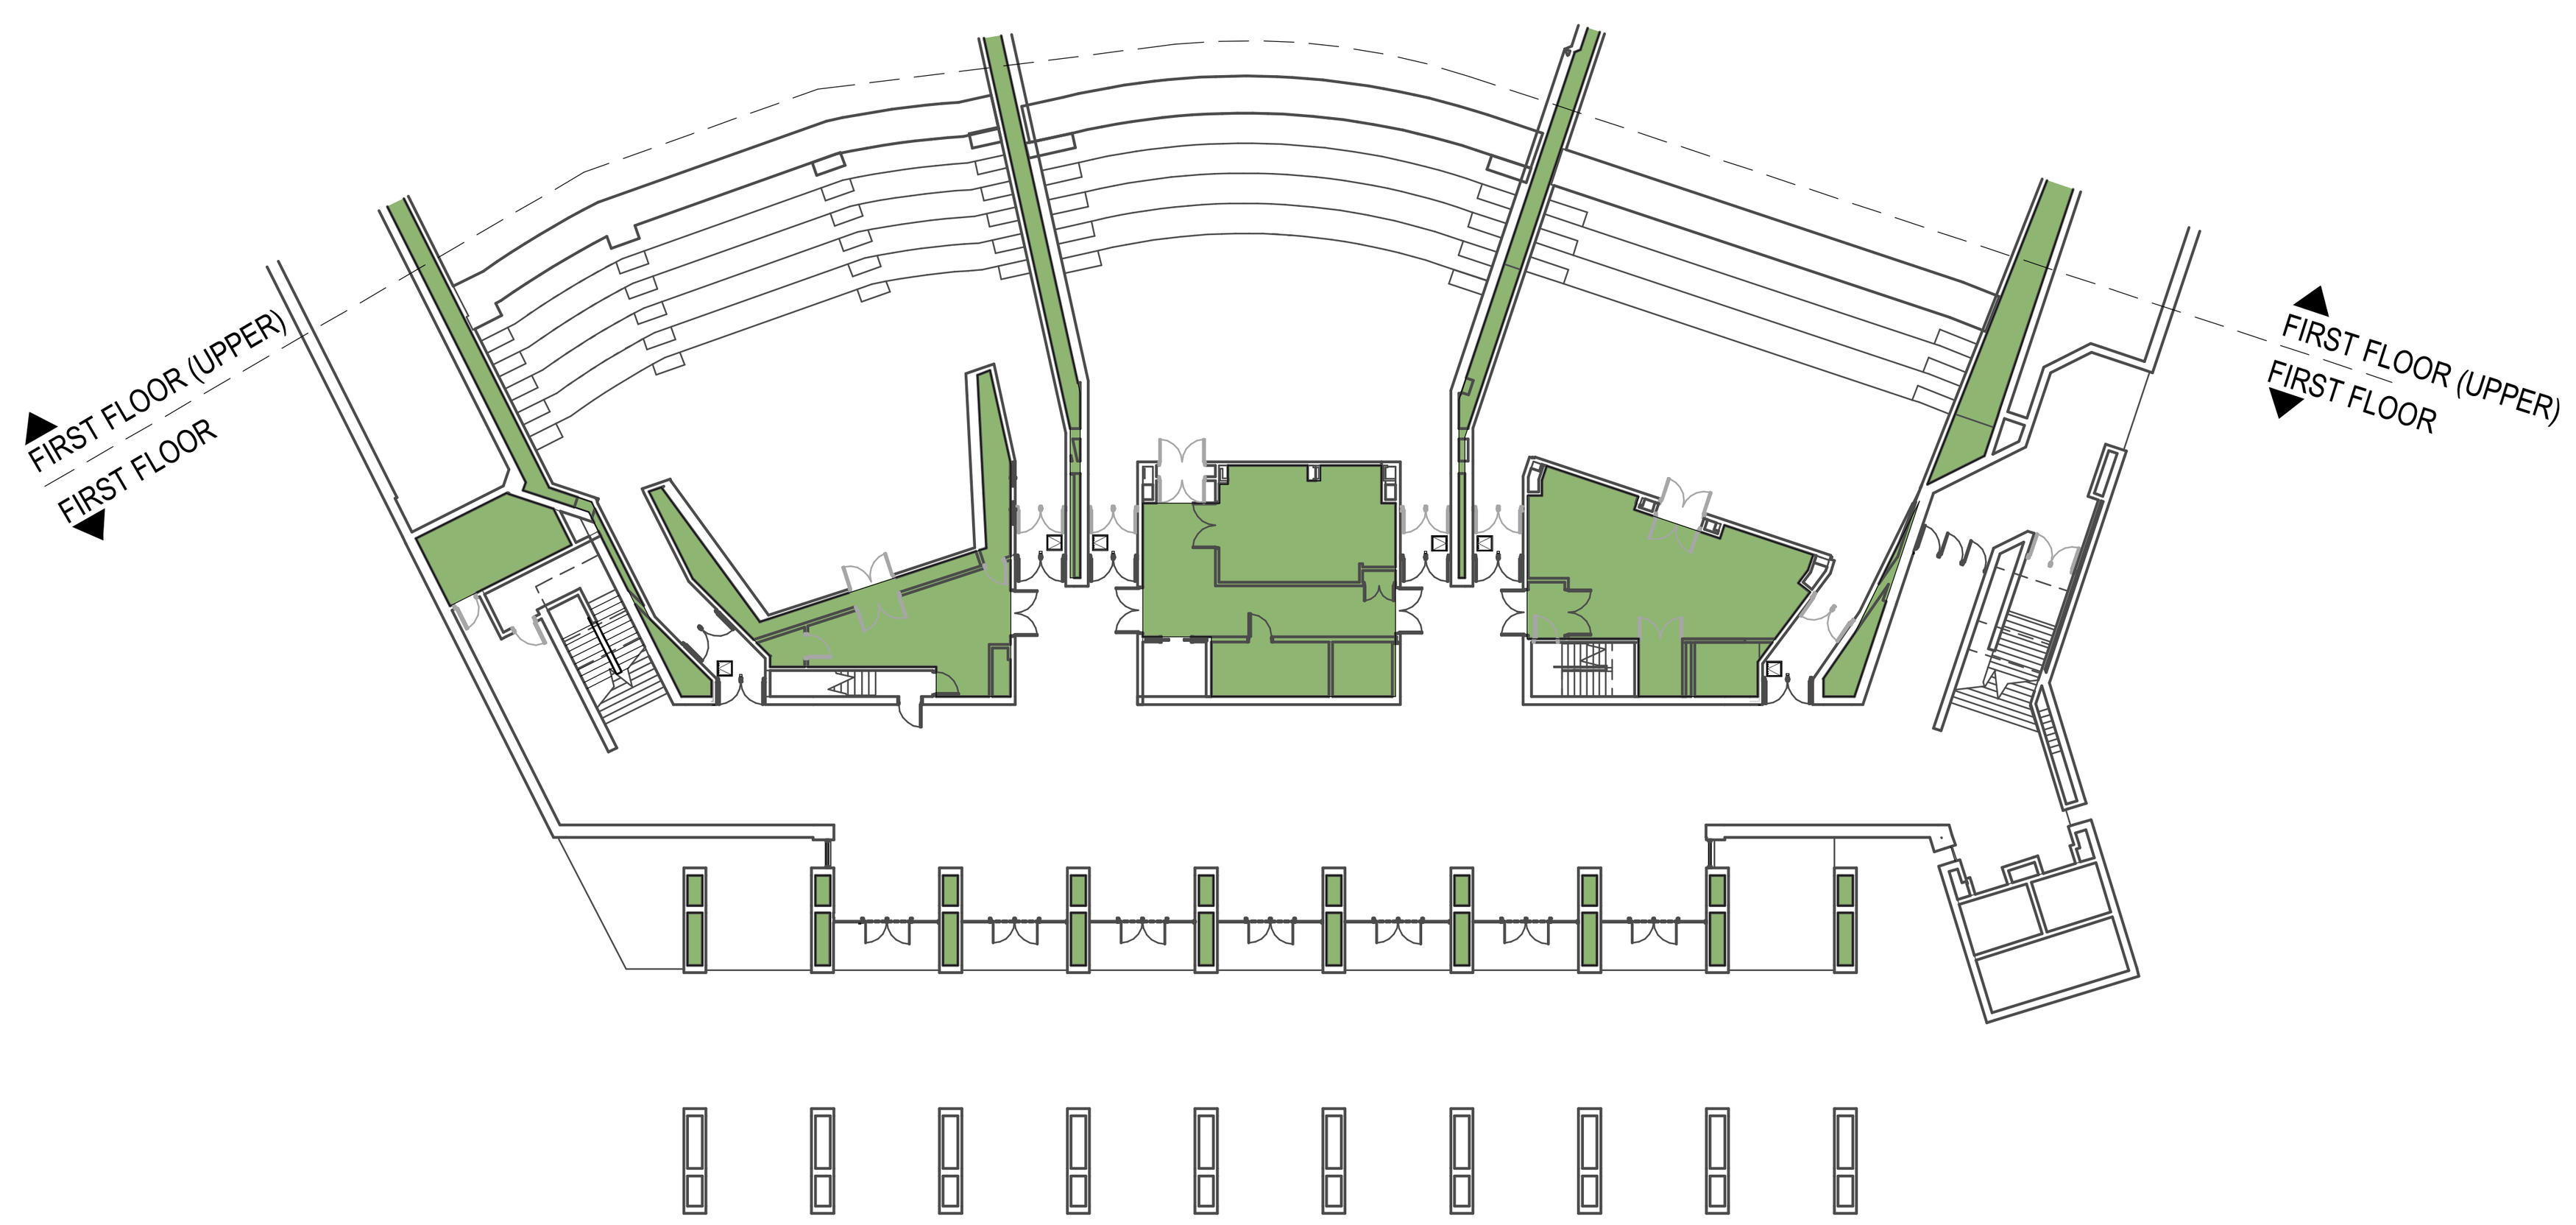

1 FIRST FLOOR (LOWER)_CONCEALED CONDUIT DIAGRAM

SCALE: 1/32" = 1'-0"

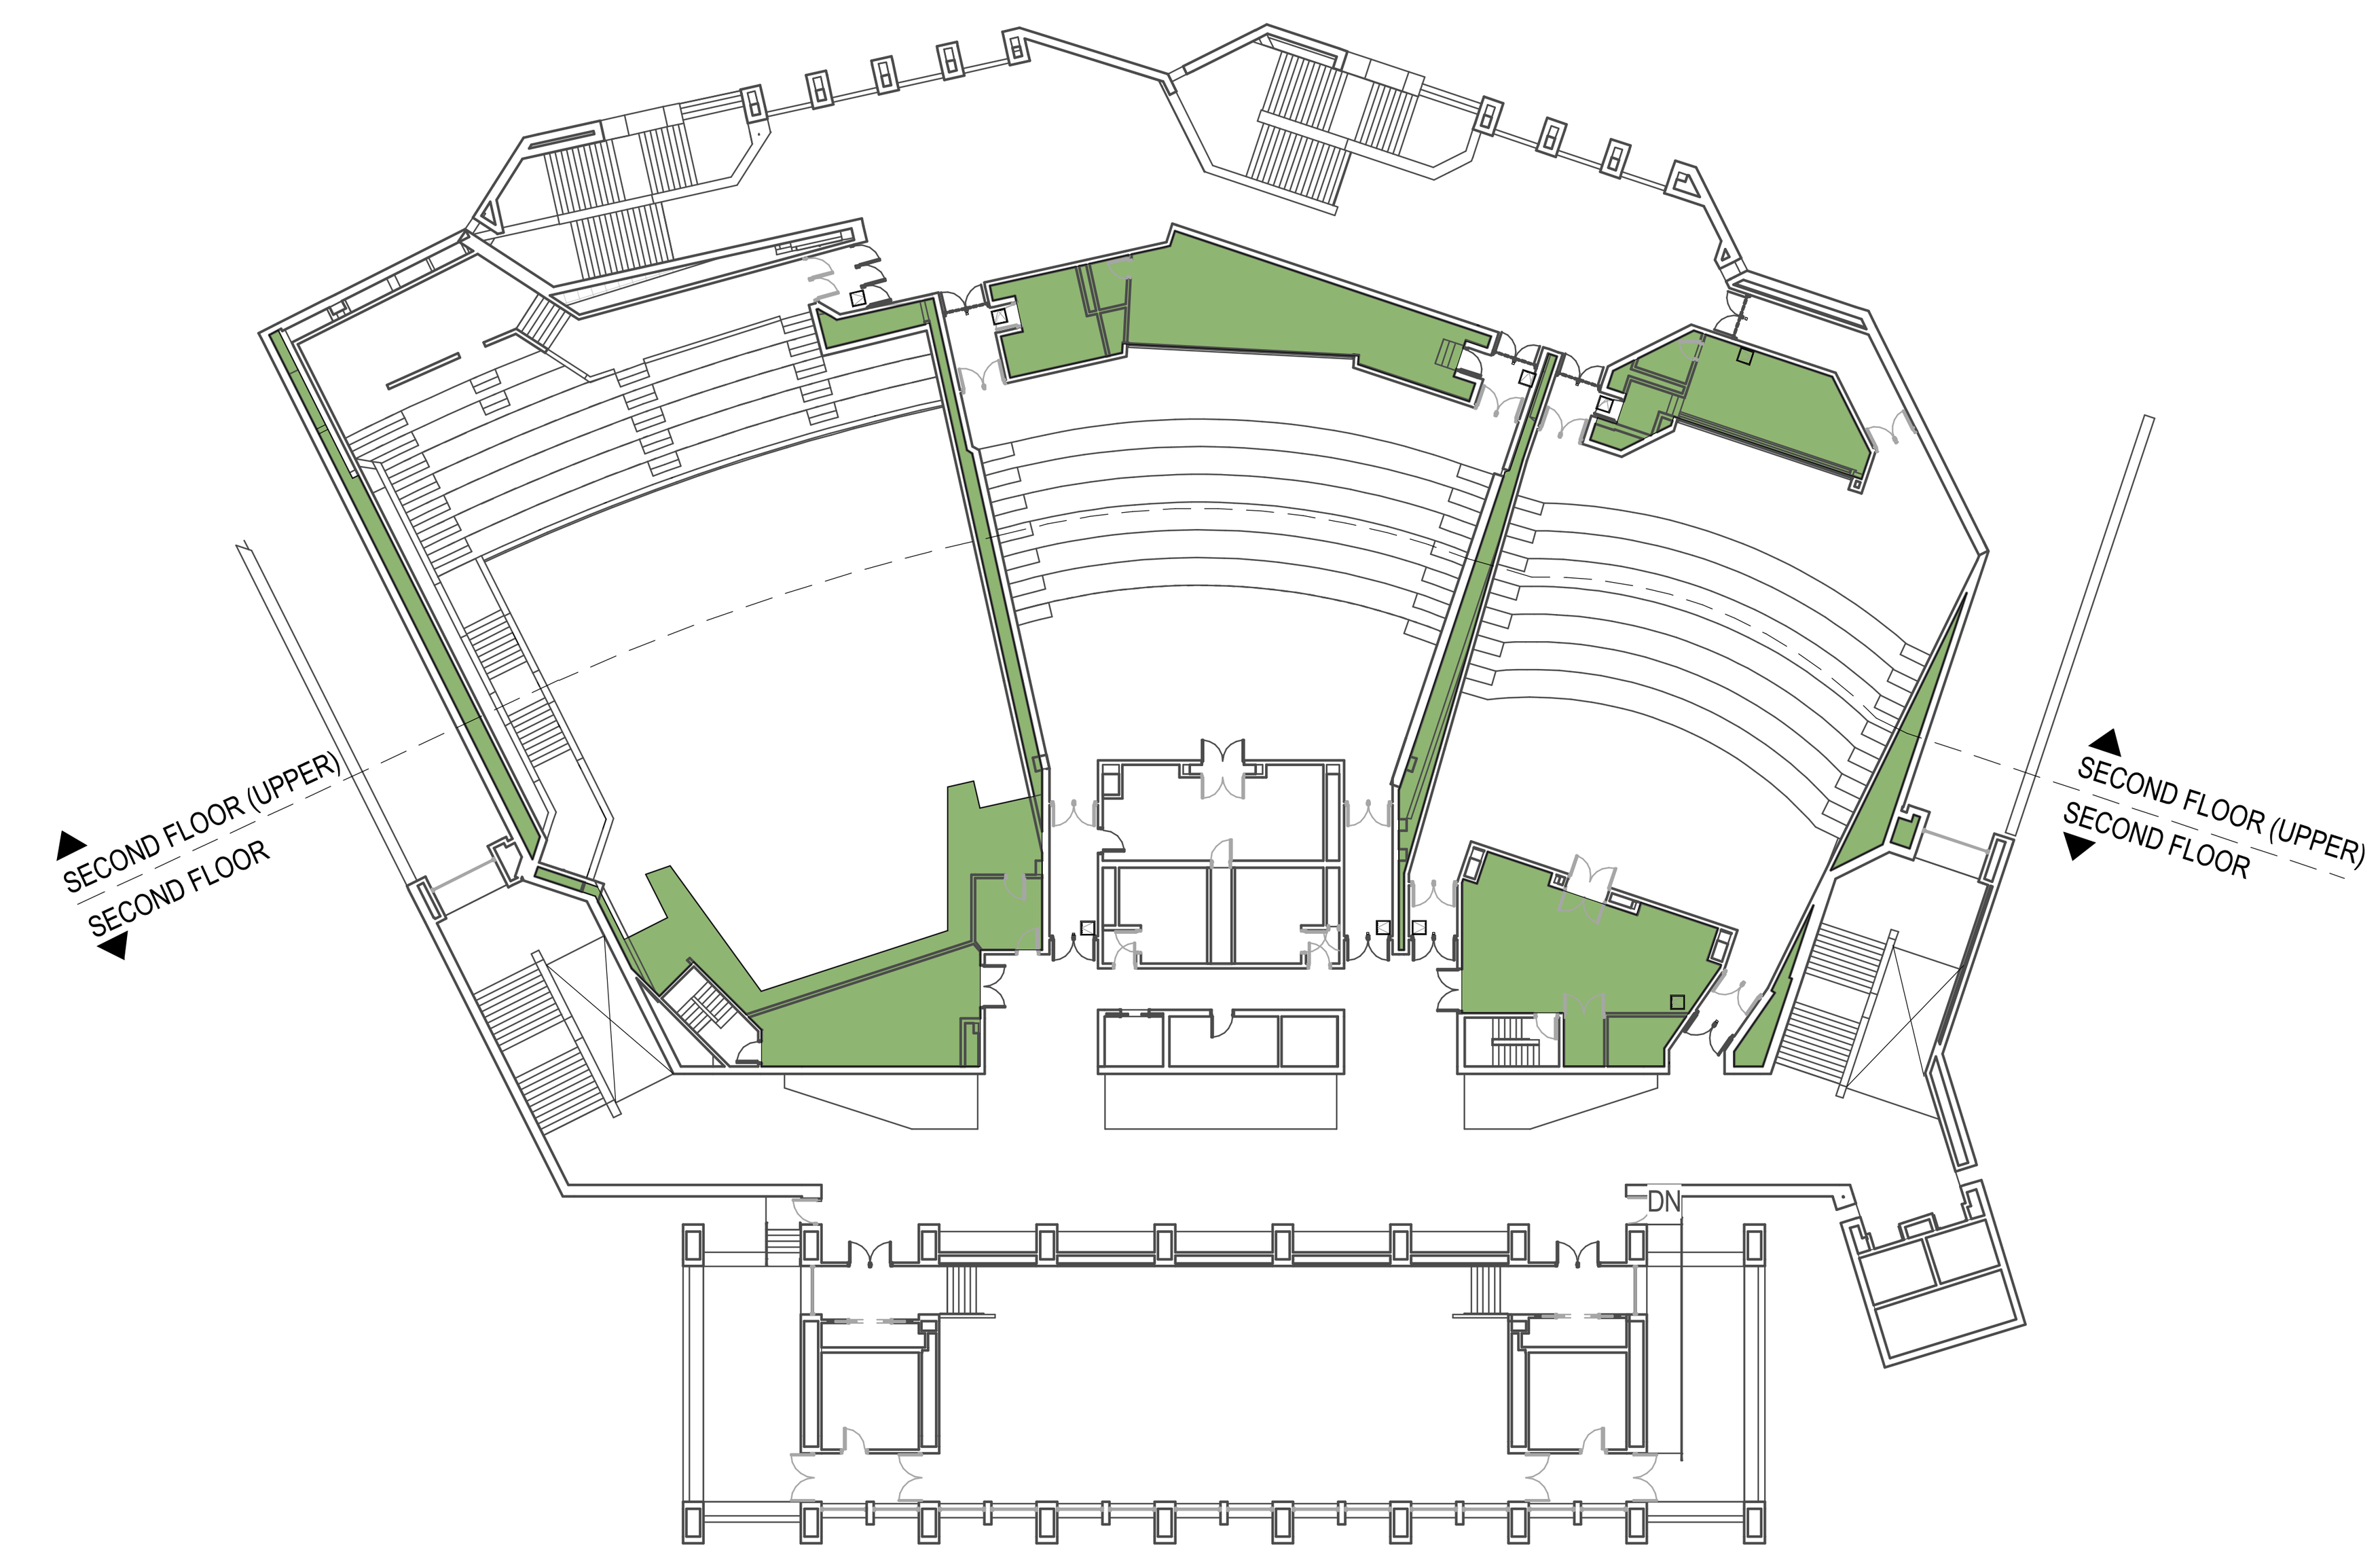

2 SECOND FLOOR_CONCEALED CONDUIT DIAGRAM

SCALE: 1/32" = 1'-0"

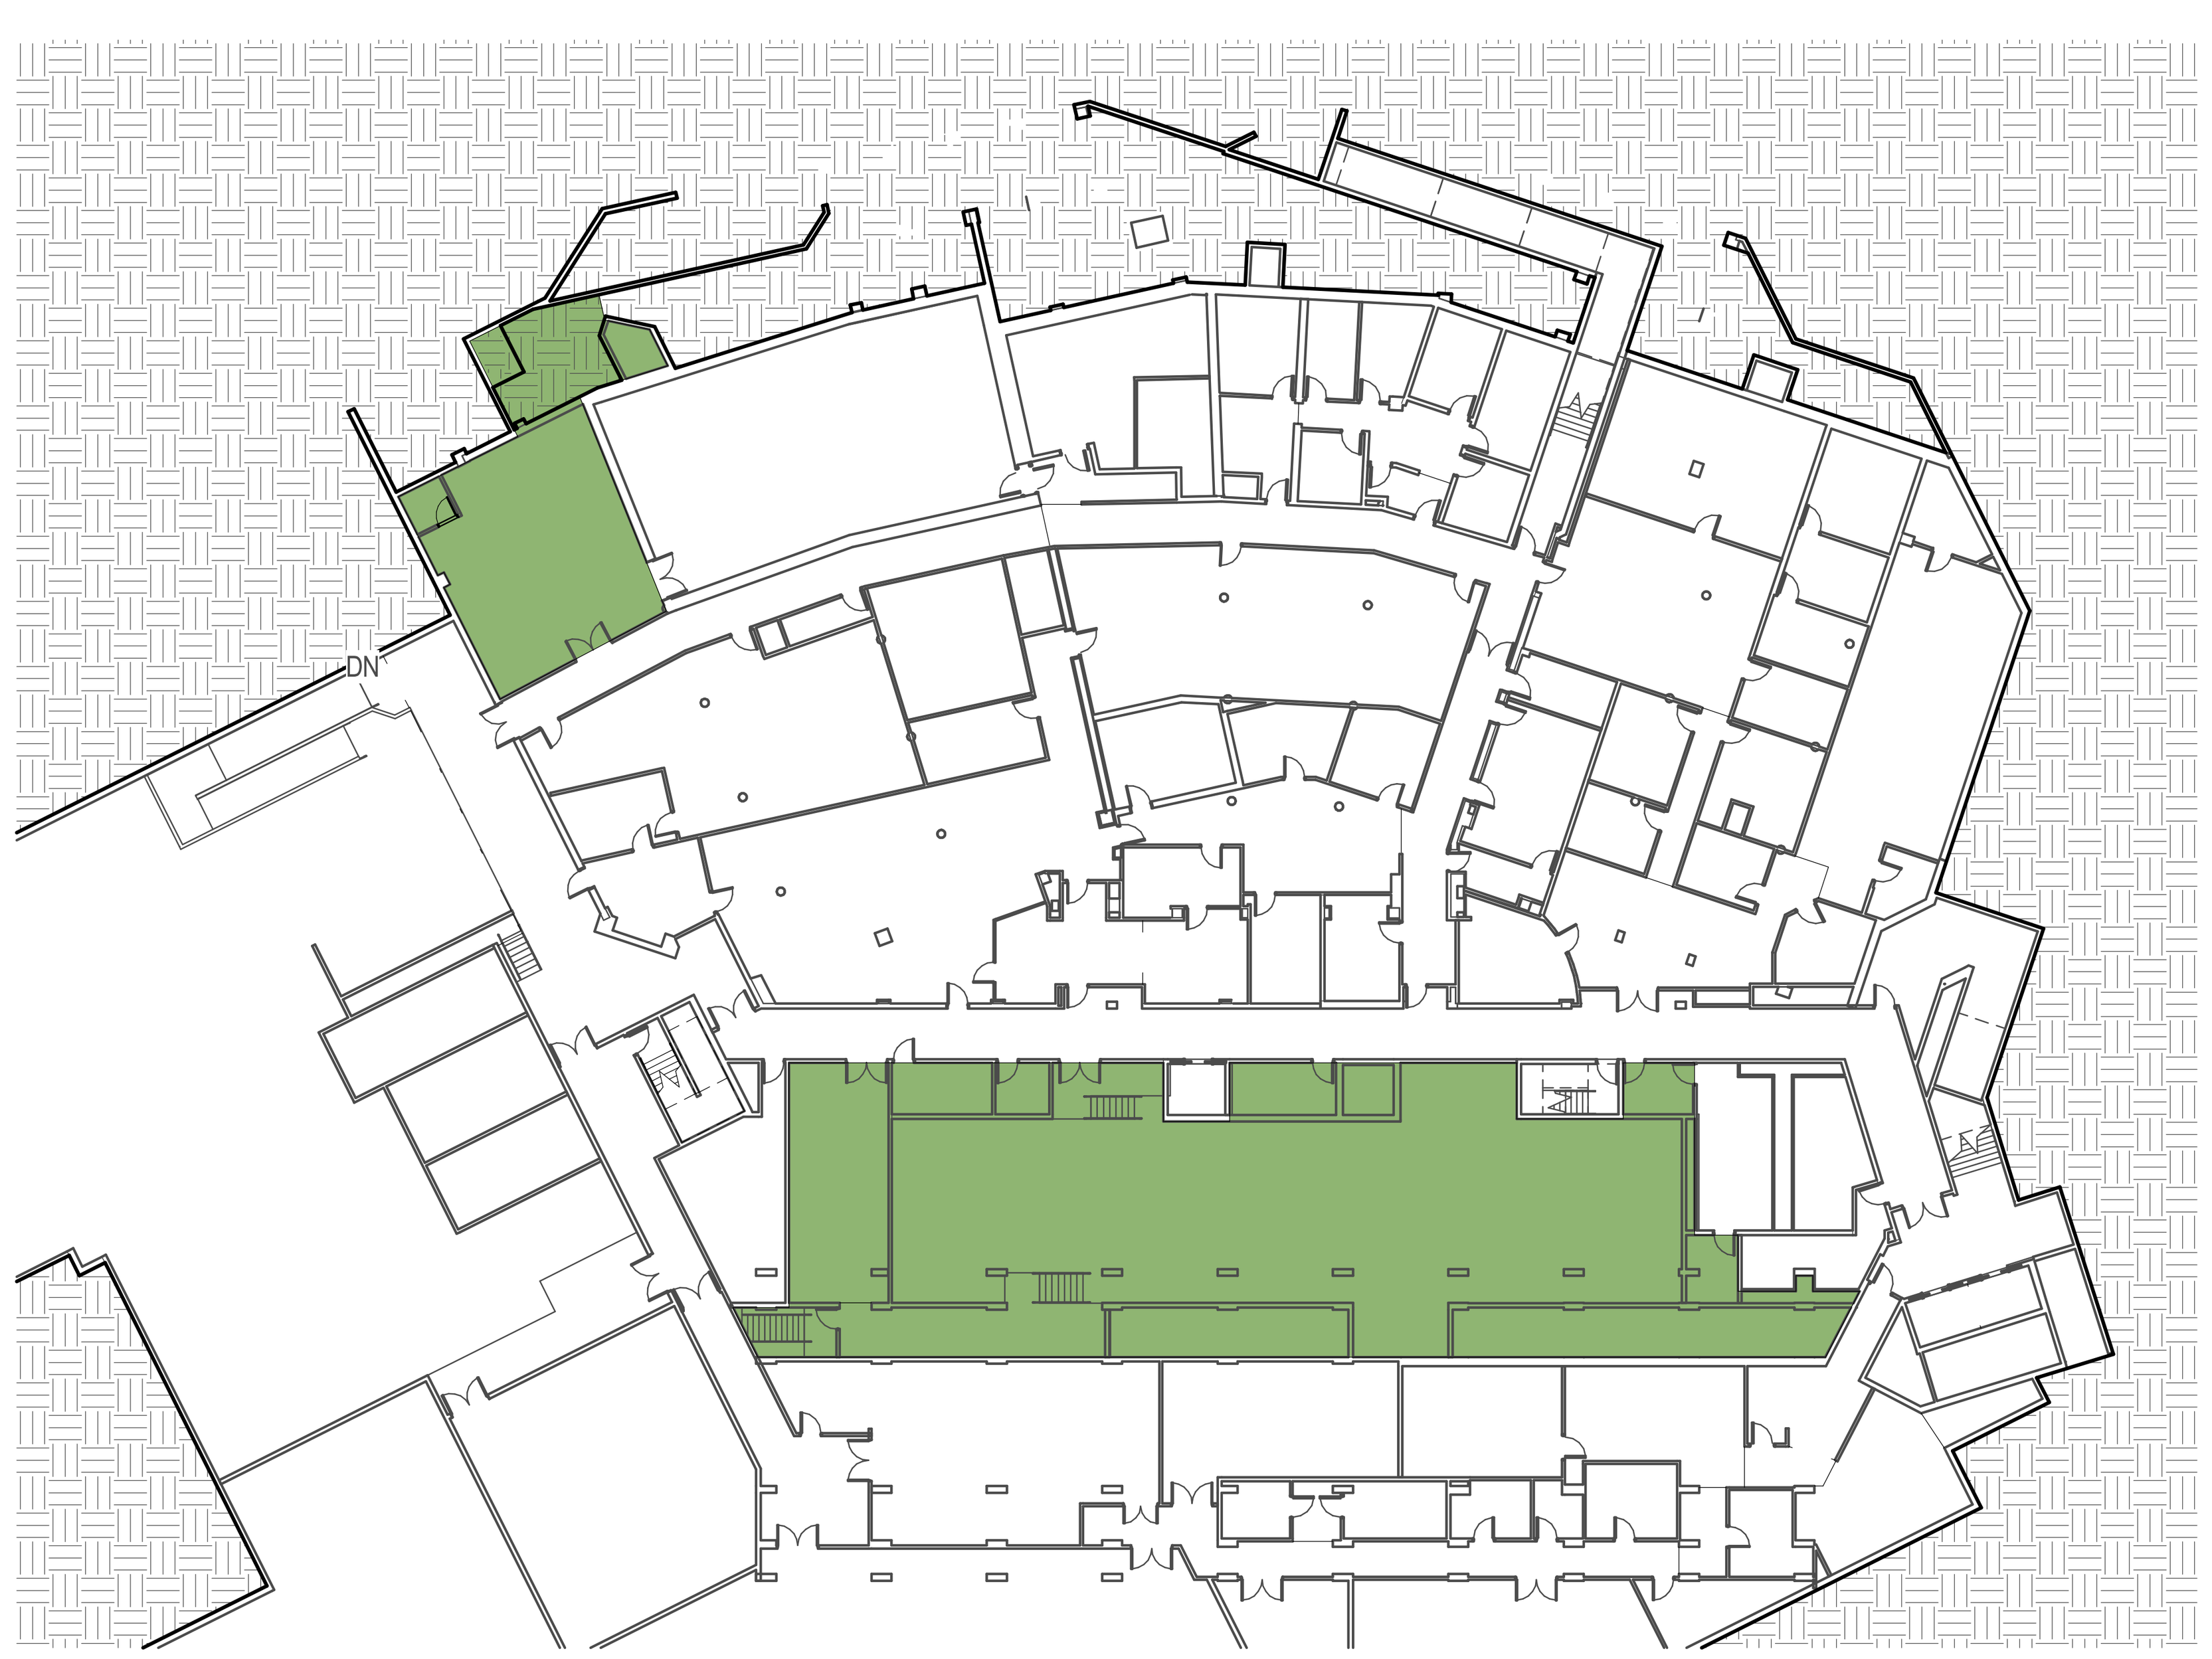

3 BASEMENT FLOOR_CONCEALED CONDUIT DIAGRAM

SCALE: 1/32" = 1'-0"

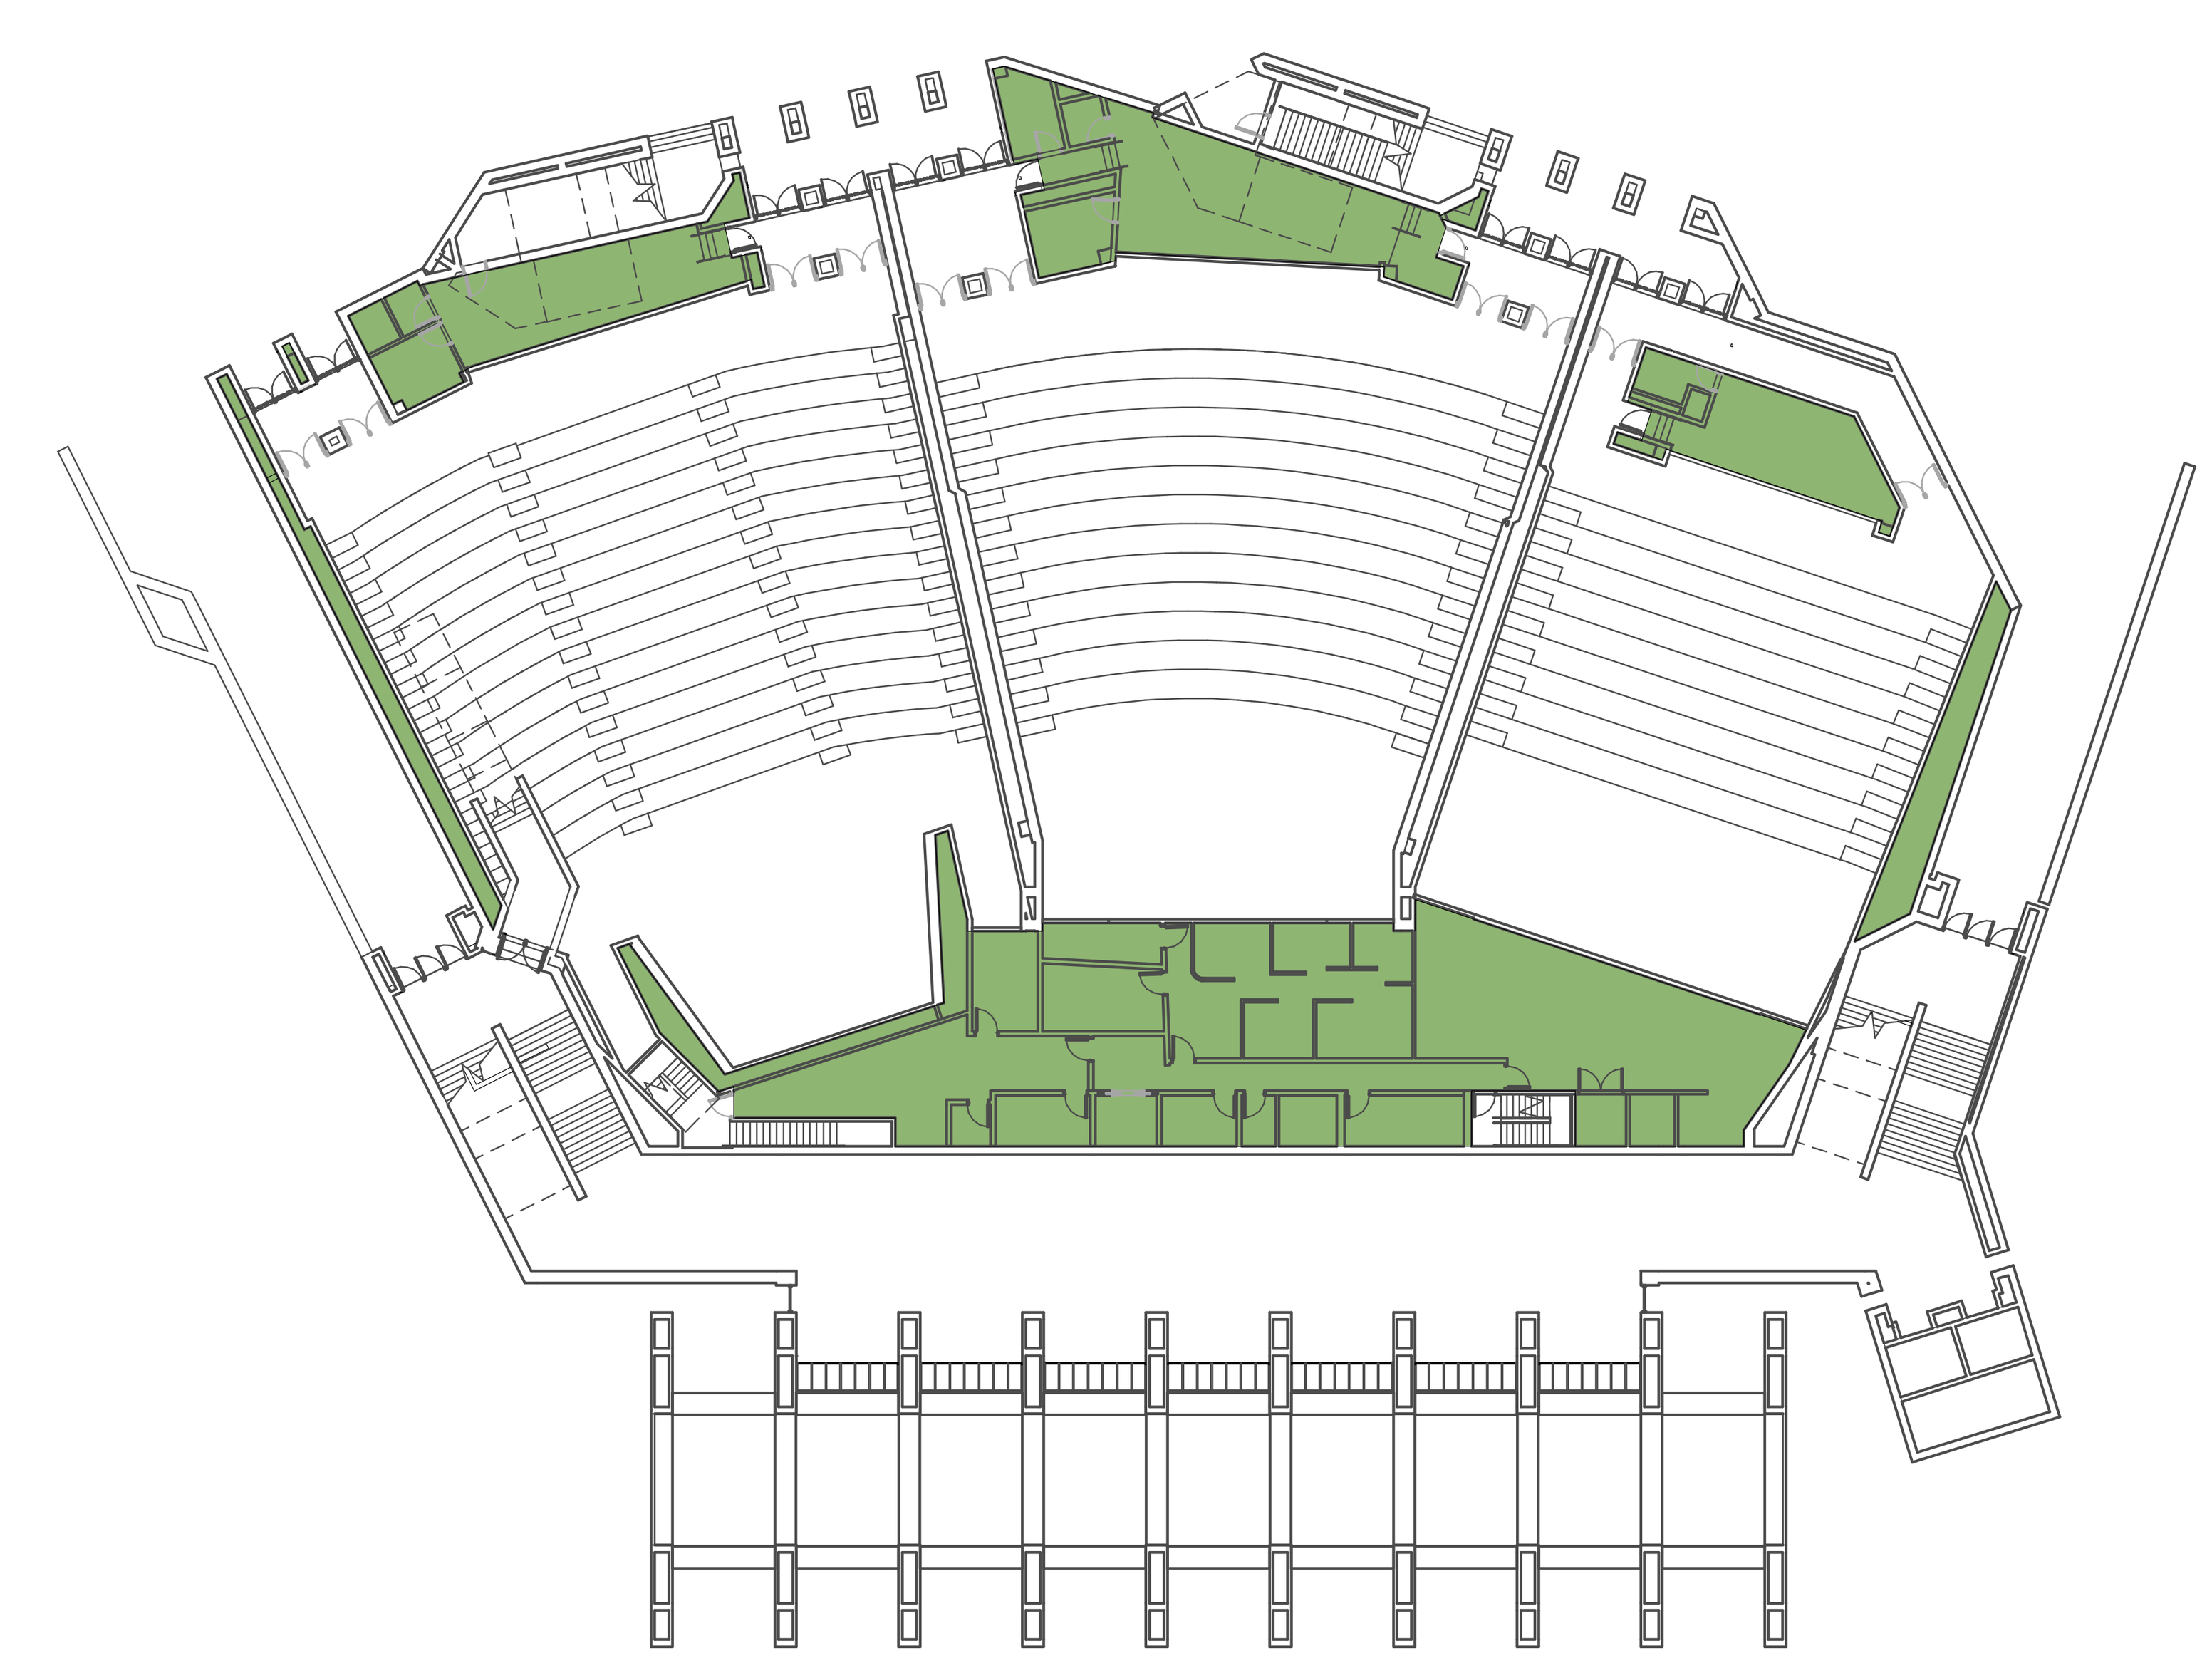

4 FIRST FLOOR (UPPER) & MEZZ_CONCEALED CONDUIT DIAGRAM

SCALE: 1/32" = 1'-0"

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

PLAN DIAGRAMS - NON-CONCEALED LOCATIONS

SHEET No.

A2.0.0

4/14/2026 10:14:18 AM

BASEMENT FLOOR

1 BASEMENT FLOOR

SCALE: 1/16" = 1'-0"

KEYNOTES

KEY	NOTE
26.2	WIRING; ROUTE WITHIN EMT IF EXPOSED/SURFACE MOUNTED; USE FLEXIBLE METAL CONDUIT TO ROUTE CONDUIT WITHIN (E) 1 1/2" BRICK VENEER CAVITY (SALVAGE & REINSTALL (E) BRICK AS REQUIRED); USE OPEN CABLING WITH CEILING MOUNTED J-HOOKS @ 48" OC FOR LOW-VOLTAGE WIRING ABOVE CEILING. REF ELEC
26.6	12"x12" ELEC BOX, REF ELEC
26.7	DRILL THROUGH (E) CONCRETE WALL TO ROUTE EMT CONDUIT INTO MECHANICAL CHASE. SEAL OPENING.
26.14	ACCESS CONTROL PANEL, REF ELEC
26.16	ROUTE WIRING TO ROOM 132 ON FIRST FLOOR (UPPER)
26.23	ROUTE TO ROOM 100A ON FIRST FLOOR (LOWER)
D2	DRILL THROUGH (E) CONC WALL (ASSUME 8" THICK) FOR CONDUIT INSTALLATION. PATCH OPENING ONCE CONDUIT IS INSTALLED

SHEET NOTES

1. REF ELEC FOR ADDITIONAL EQUIPMENT
2. CONDUITS SHALL BE CONCEALED IN WALLS, CHASES, ABOVE SUSPENDED CEILINGS, BELOW FLOORS OR BE FURRED-IN IN ROOMS WITH EXISTING CEILINGS, UNLESS OTHERWISE NOTED.
3. REF SPEC FOR FIRESTOPPING REQUIREMENTS AT WALL PENETRATIONS
4. REFER TO ELEVATIONS AND SECTIONS FOR ADDITIONAL WORK NOT INDICATED IN PLAN
5. REFER TO SECTION 00 31 00 (AVAILABLE INFORMATION) FOR ADDITIONAL EXISTING CONDITION INFORMATION

PLAN LEGEND

	(E) WALL
DOOR	DOOR TAG, REF SCHEDULE
CAAMS	ACCESS CONTROL PANEL
PIM	PANEL INTERFACE MODULE
	CEILING ACCESS HATCH
	8" X 8" ELECTRICAL BOX
	12" X 12" ELECTRICAL BOX
ADA	SALVAGE & REINSTALL (E) ADA OPERATOR & ASSOCIATED PUSH BUTTONS
	WIRING, REF KEYNOTE: INSTALL ABOVE CEILING OR BEHIND BRICK VENEER IN PUBLIC SPACES. IT'S ACCEPTABLE TO SURFACE-MOUNT CONDUIT WITHIN ROOMS: 026, 030, 045, 100A, 110A, 112, 118, 118A, 124, 128, 132, 136, 212, 211, 221
	WIRELESS CARD READER
	CARD READER
	ADA PUSH BUTTON
	PIEZO SOUNDER, INSTALL IN RECESSED BOX WITHIN (E) BRICK VENEER, (E) WD TRIM, OR (E) GWB CLG, REF ELEV
ECLD	EMERGENCY CLASS LOCKDOWN (ECLD); RECESS WITHIN (E) FINISHES, SALVAGE & REINSTALL (E) FINISHES AS REQUIRED TO ROUTE WIRING (IN CONCEALED MANNER) BACK TO CAAMS PANEL

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

BASEMENT FLOOR PLAN

SHEET No.

A2.0.1

4/14/2026 10:14:20 AM

KEYNOTES

KEY	NOTE
5.2	C12x20.7 CHANNEL W/ PAINTED FINISH
8.1	18" x 18" ACCESS HATCH W/IN (E) GWB CEILING
26.1	EMT ELEC CONDUIT, REF ELEC
26.2	WIRING; ROUTE WITHIN EMT IF EXPOSED/SURFACE MOUNTED; USE FLEXIBLE METAL CONDUIT TO ROUTE CONDUIT WITHIN (E) 1 1/2" BRICK VENEER CAVITY (SALVAGE & REINSTALL (E) BRICK AS REQUIRED); USE OPEN CABLING WITH CEILING MOUNTED J-HOOKS @ 48" OC FOR LOW-VOLTAGE WIRING ABOVE CEILING. REF ELEC
26.4	8"x8" ELEC BOX, REF ELEC
26.5	SAWCUT/CHIP (E) CONC WALL TO EMBED CONDUIT/WIRING TO SERVE CARD READER, ROUTE IN CONCEAL MANNER TO CONNECT W/ HARDWARE SERVING DOOR 107. PATCH WALL W/ CONC TO MATCH (E)
26.8	VAPOR PROOF 4' LINEAR LED LIGHT, RECESS WITHIN PERFORATE METAL MESH CEILING, REF ELEC
26.12	PIEZO SOUNDER W/IN RECESSED BOX. ROUTE LOW-VOTAGE WIRING AND FLEXIBLE METAL CONDUIT TO CONTROL BOX, REF ELEC
26.14	ACCESS CONTROL PANEL, REF ELEC
26.15	EMERGENCY CLASS LOCKDOWN BUTTON, SALVAGE & REINSTALL (E) FINISHES AS REQ TO INSTALL RECESSED BOX AND RECESS LOW-VOLTAGE WIRING, REF ELEC
26.17	ROUTE WIRING TO ROOM M112 ON SECOND FLOOR
26.21	(2) 2" CONDUITS TO CAAMS PANEL, REF ELEC
26.24	PIEZO SOUNDER W/ IN RECESSED BOX (ON SECURE SIDE). EMBED W/IN (E) WD TRIM, ROUTE-OUT (E) WD FRAMING AS REQ TO ROUTE LOW-VOLTAGE WIRING TO CONTROL BOX
28.1	CARD READER W/ RECESSED ELEC BOX, REF ELEC
D1	DRILL THROUGH (E) ELEVATE CONCRETE SLAB INTO BASE OF (E) WD DOOR JAMB
D2	DRILL THROUGH (E) CONC WALL (ASSUME 8" THICK) FOR CONDUIT INSTALLATION. PATCH OPENING ONCE CONDUIT IS INSTALLED
D3	DRILL THROUGH (E) CONC WALL (ASSUME 8" THICK) W/ BRICK VENEER (3.5" THICK W/ 1.5" AIR GAP) FOR CONDUIT INSTALLATION. PATCH OPENING ONCE CONDUIT IS INSTALLED.

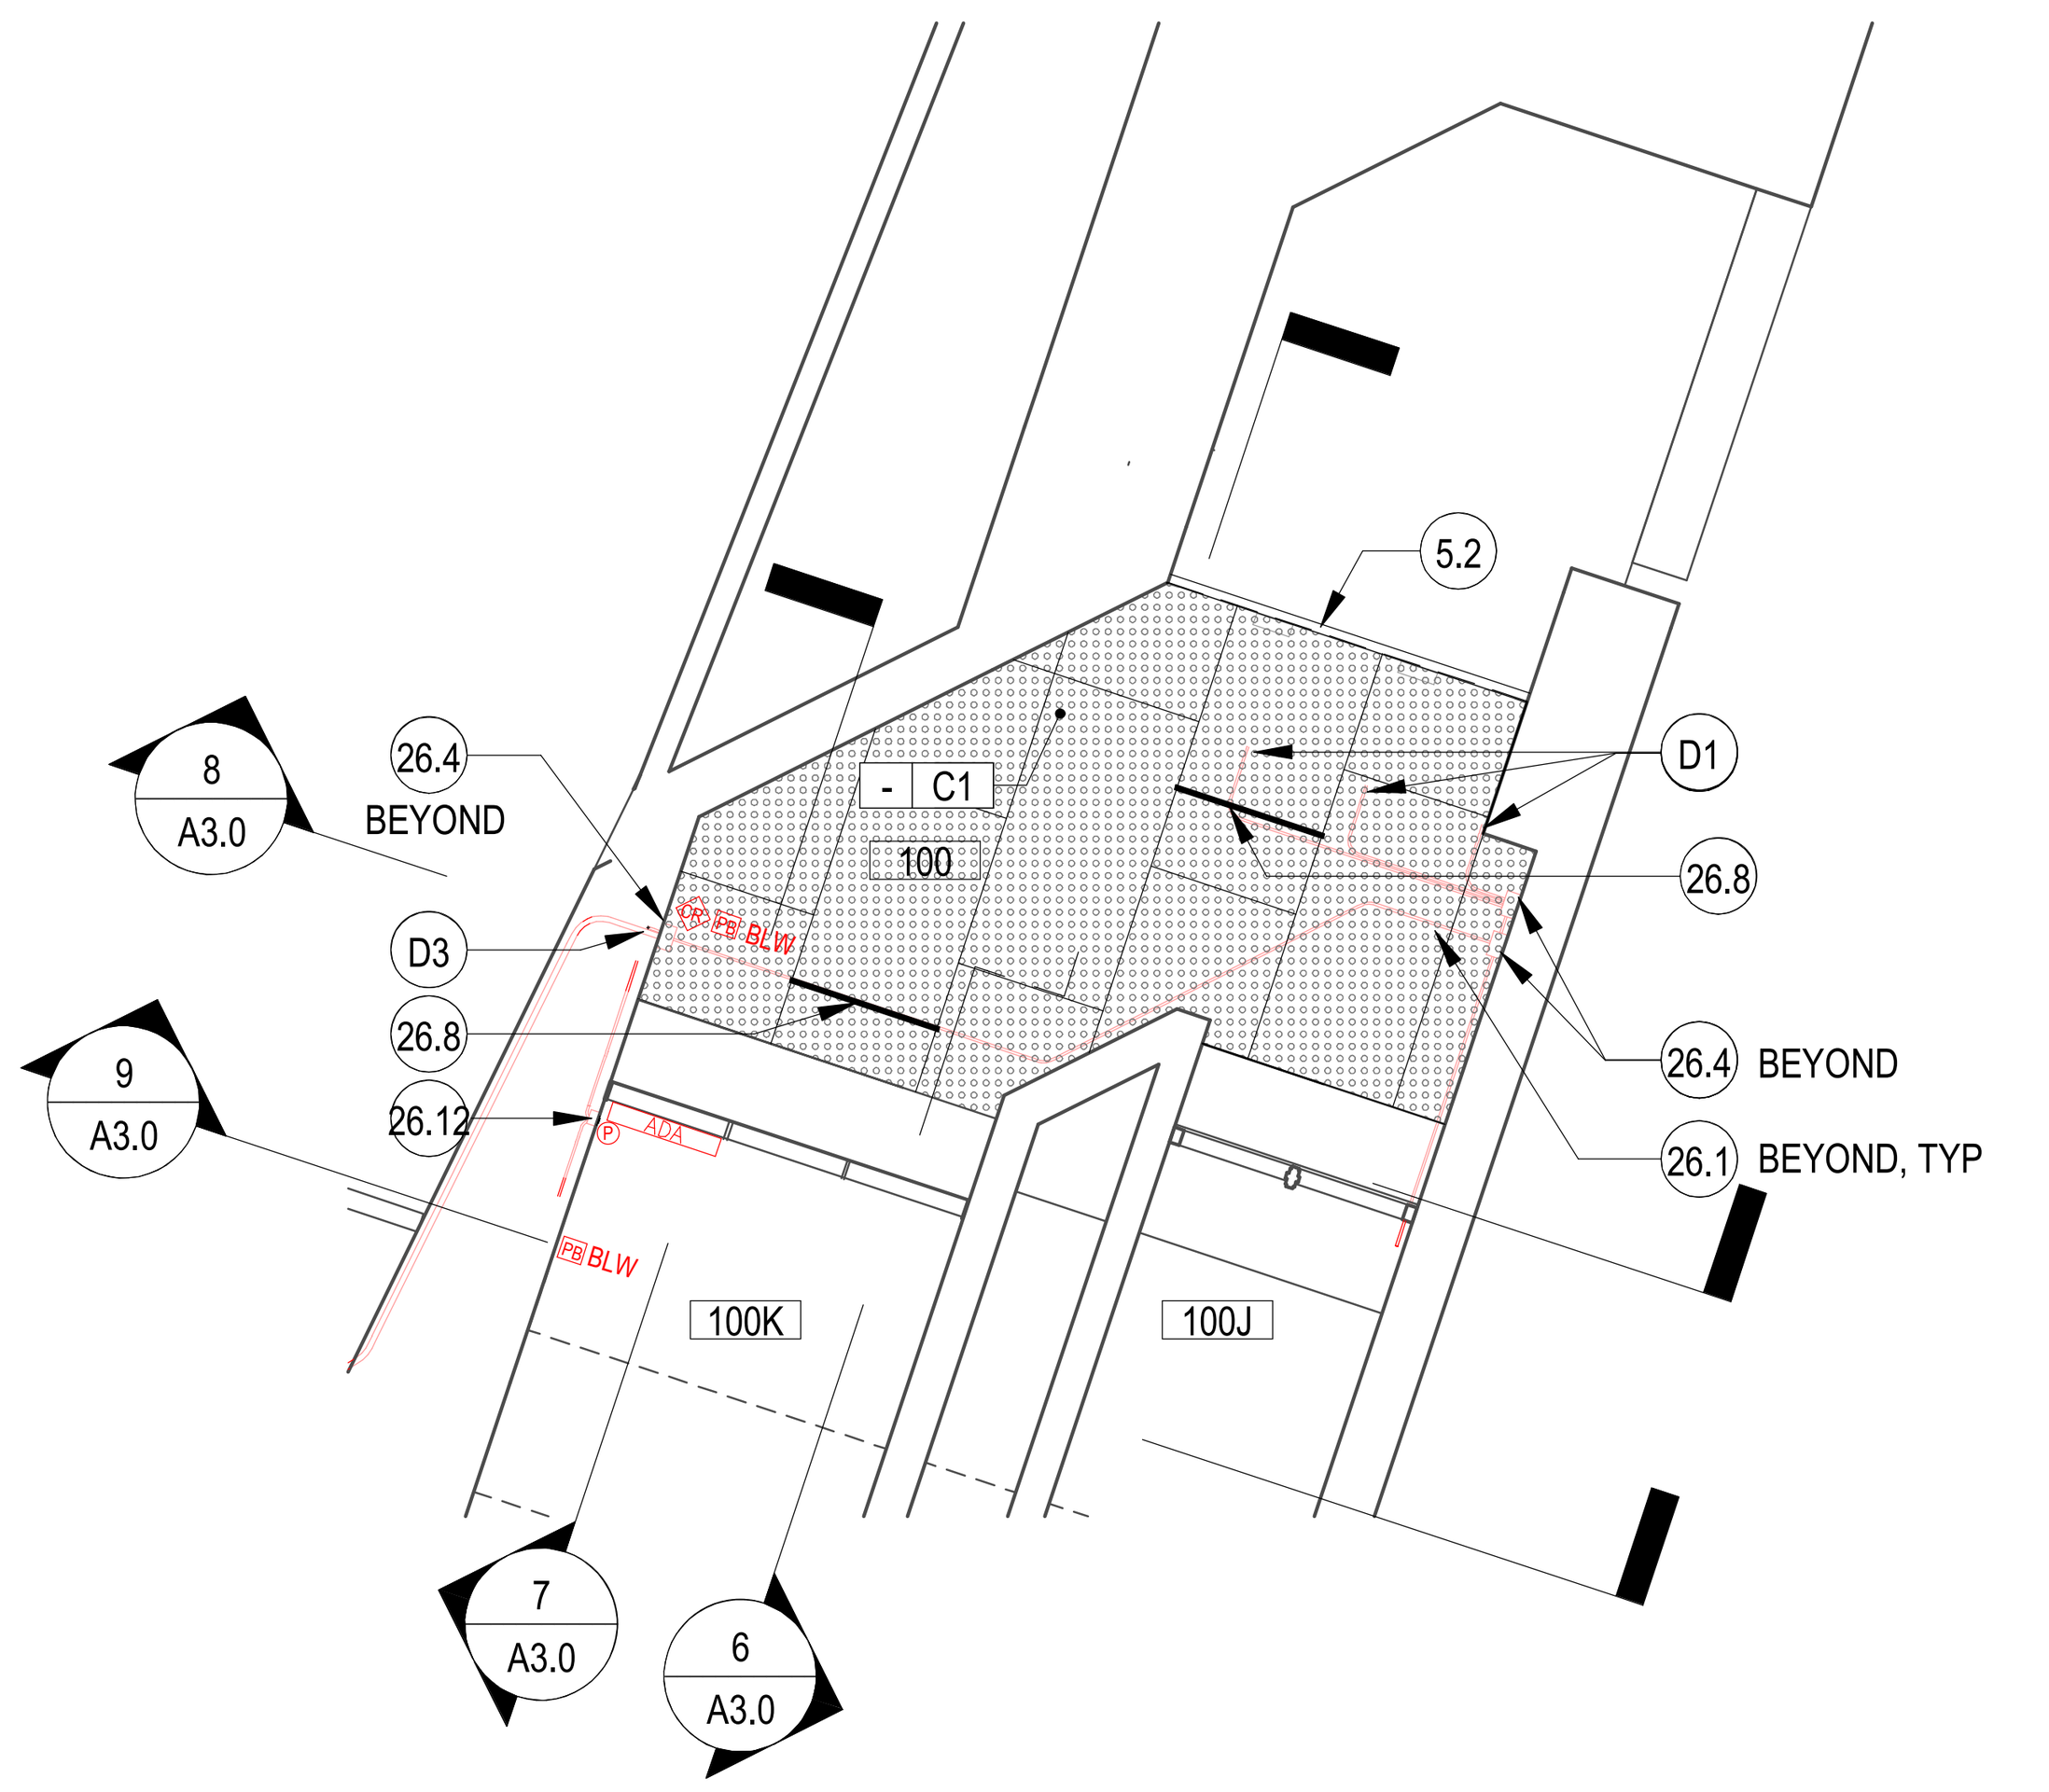

2 GROUP B_EAST ENTRY VESTIBULE RCP

SCALE: 1/8" = 1'-0"

SHEET NOTES

1. REF ELEC FOR ADDITIONAL EQUIPMENT
2. CONDUITS SHALL BE CONCEALED IN WALLS, CHASES, ABOVE SUSPENDED CEILINGS, BELOW FLOORS OR BE FURRED-IN IN ROOMS WITH EXISTING CEILINGS, UNLESS OTHERWISE NOTED.
3. REF SPEC FOR FIRESTOPPING REQUIREMENTS AT WALL PENETRATIONS
4. REFER TO ELEVATIONS AND SECTIONS FOR ADDITIONAL WORK NOT INDICATED IN PLAN
5. REFER TO SECTION 00 31 00 (AVAILABLE INFORMATION) FOR ADDITIONAL EXISTING CONDITION INFORMATION

PLAN LEGEND

	(E) WALL
DOOR	DOOR TAG, REF SCHEDULE
CAAMS	ACCESS CONTROL PANEL
PIM	PANEL INTERFACE MODULE
	CEILING ACCESS HATCH
	8" X 8" ELECTRICAL BOX
	12" X 12" ELECTRICAL BOX
ADA	SALVAGE & REINSTALL (E) ADA OPERATOR & ASSOCIATED PUSH BUTTONS
	WIRING, REF KEYNOTE: INSTALL ABOVE CEILING OR BEHIND BRICK VENEER IN PUBLIC SPACES. IT'S ACCEPTABLE TO SURFACE-MOUNT CONDUIT WITHIN ROOMS: 026, 030, 045, 100A, 110A, 112, 118, 118A, 124, 128, 132, 136, 212, 211, 221
CR WL	WIRELESS CARD READER
CR	CARD READER
PB	ADA PUSH BUTTON
P	PIEZO SOUNDER, INSTALL IN RECESSED BOX WITHIN (E) BRICK VENEER, (E) WD TRIM, OR (E) GWB CLG, REF ELEV
ECLD	EMERGENCY CLASS LOCKDOWN (ECLD); RECESS WITHIN (E) FINISHES, SALVAGE & REINSTALL (E) FINISHES AS REQUIRED TO ROUTE WIRING (IN CONCEALED MANNER) BACK TO CAAMS PANEL

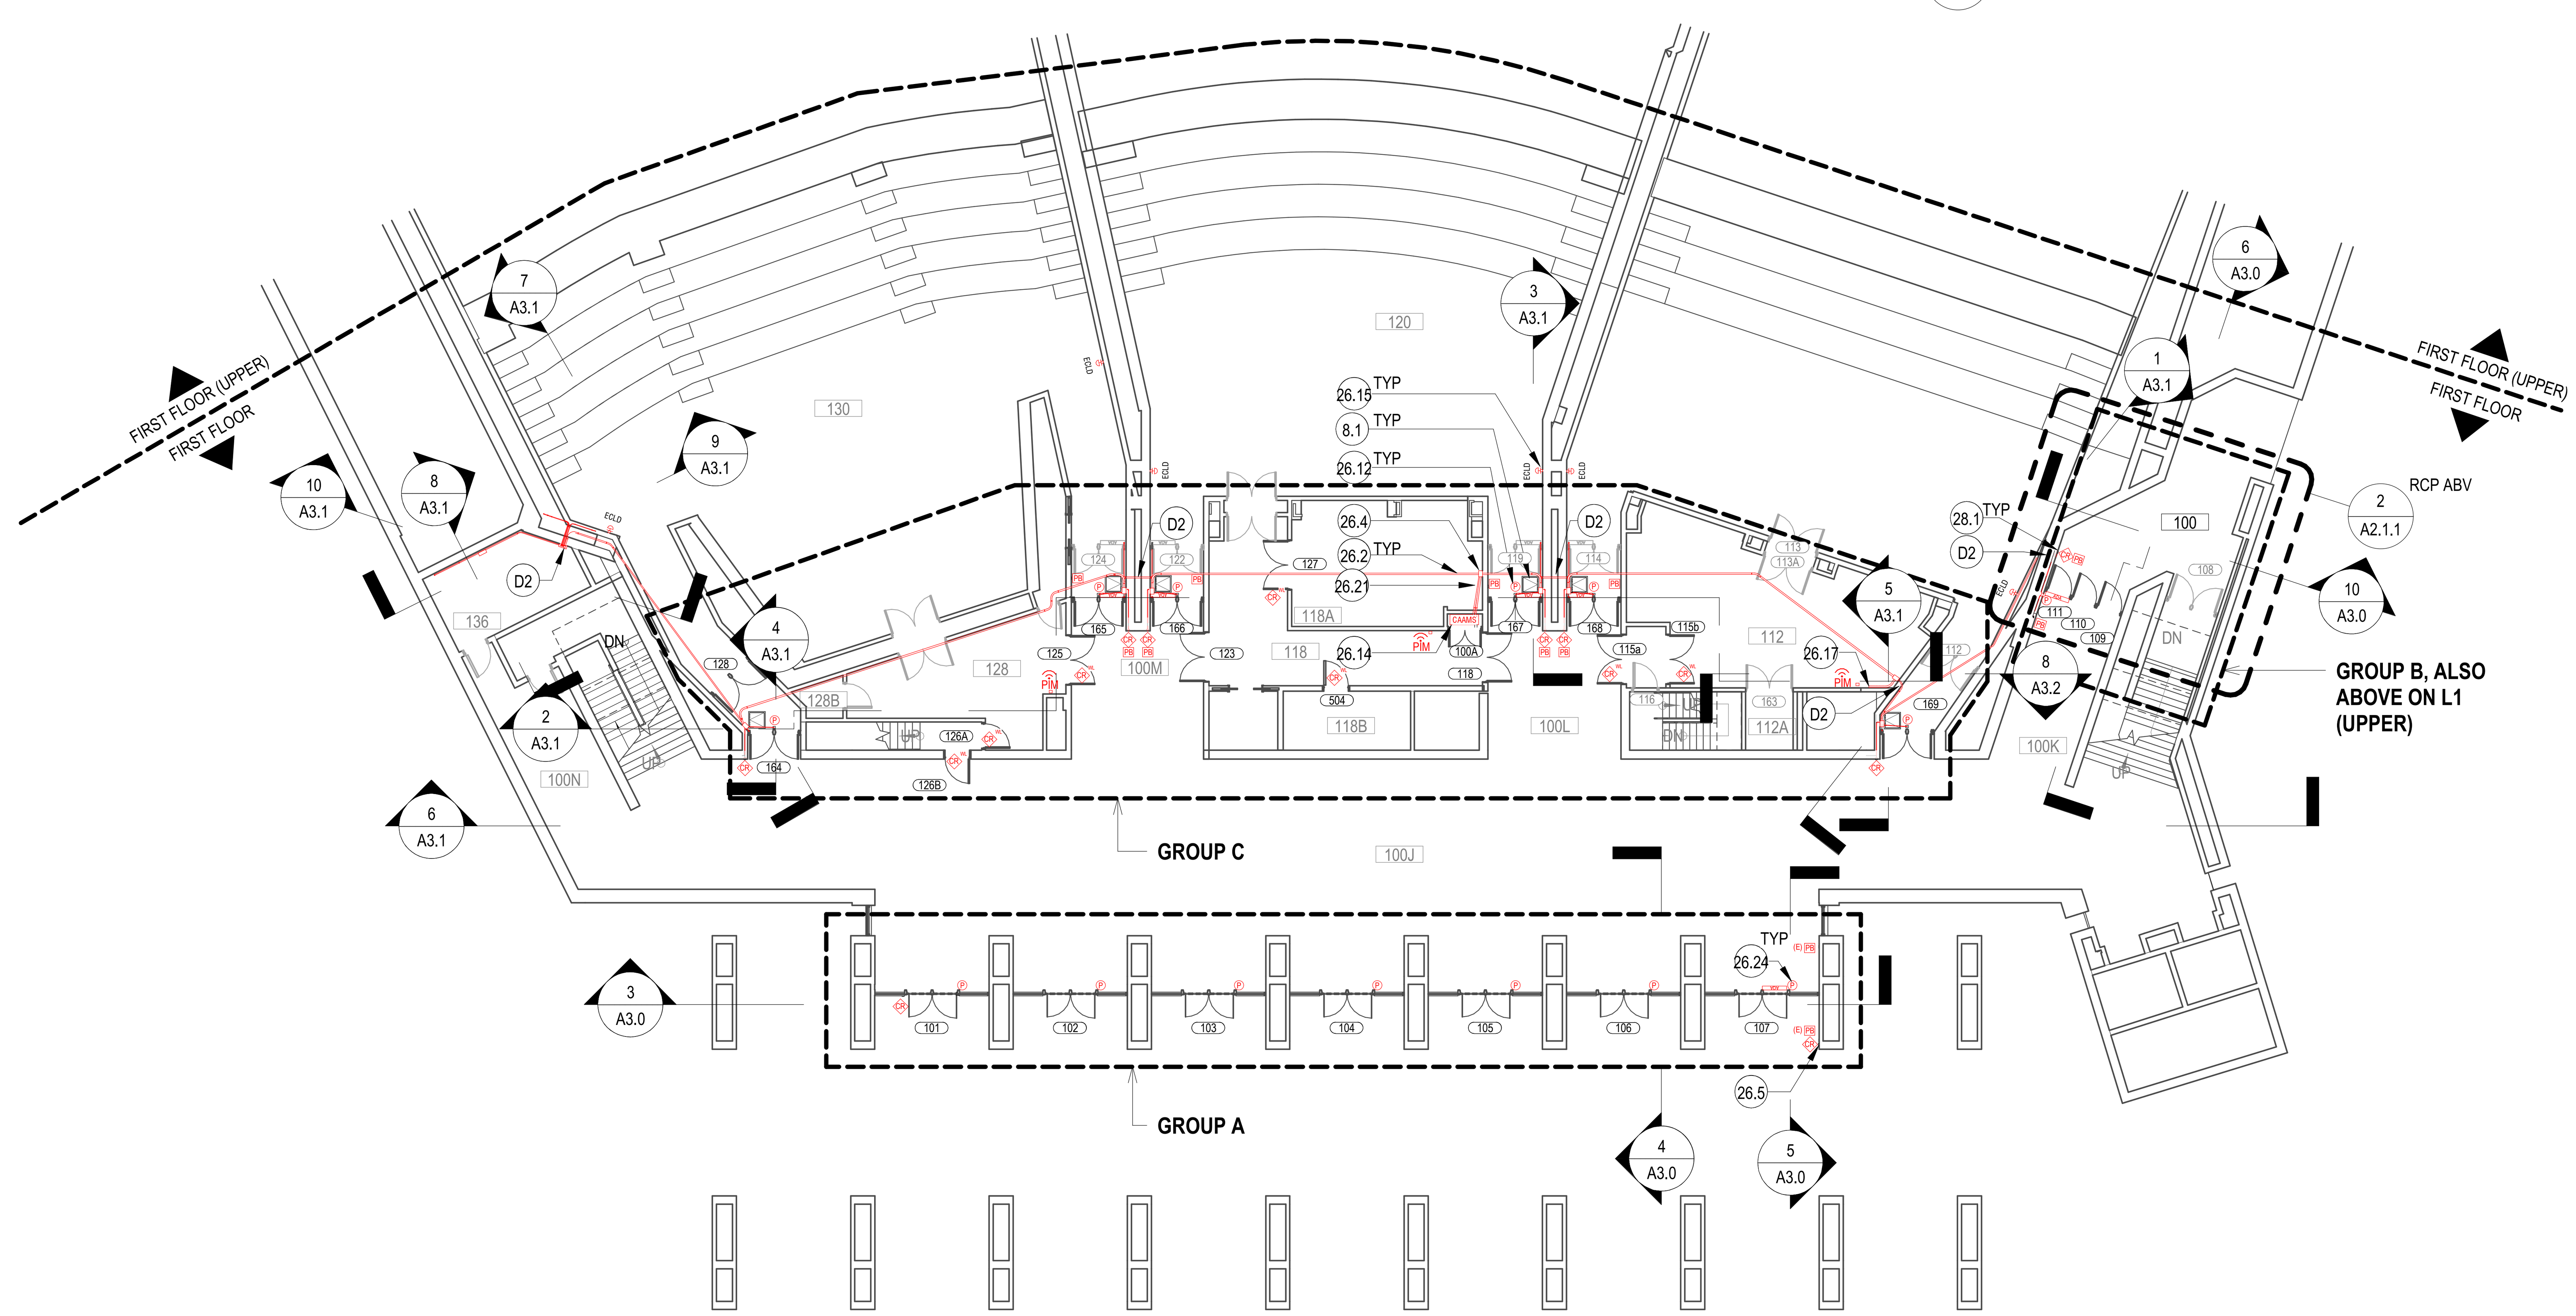

1 FIRST FLOOR (LOWER)

SCALE: 1/16" = 1'-0"

4/14/2026 10:14:22 AM

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN

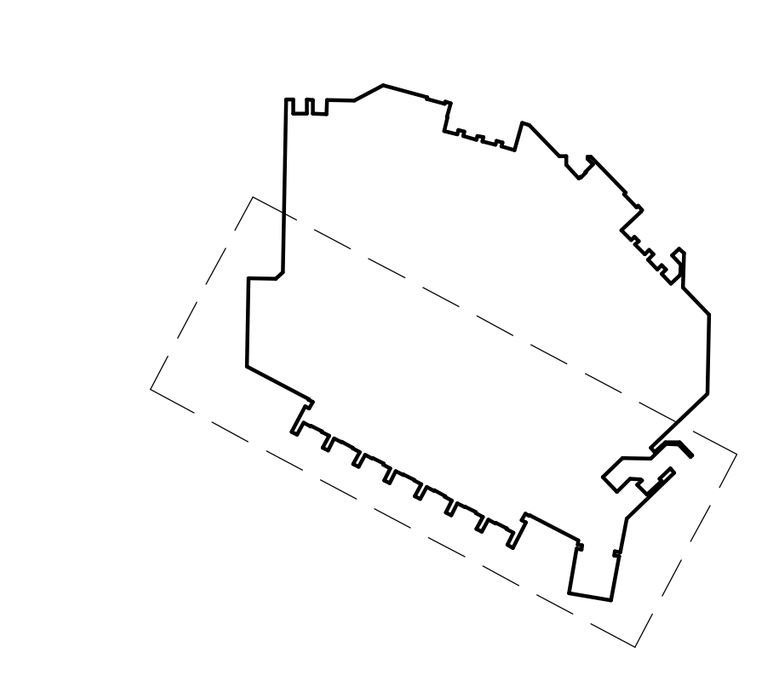

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

FIRST FLOOR PLAN (LOWER)

SHEET No.

A2.1.1

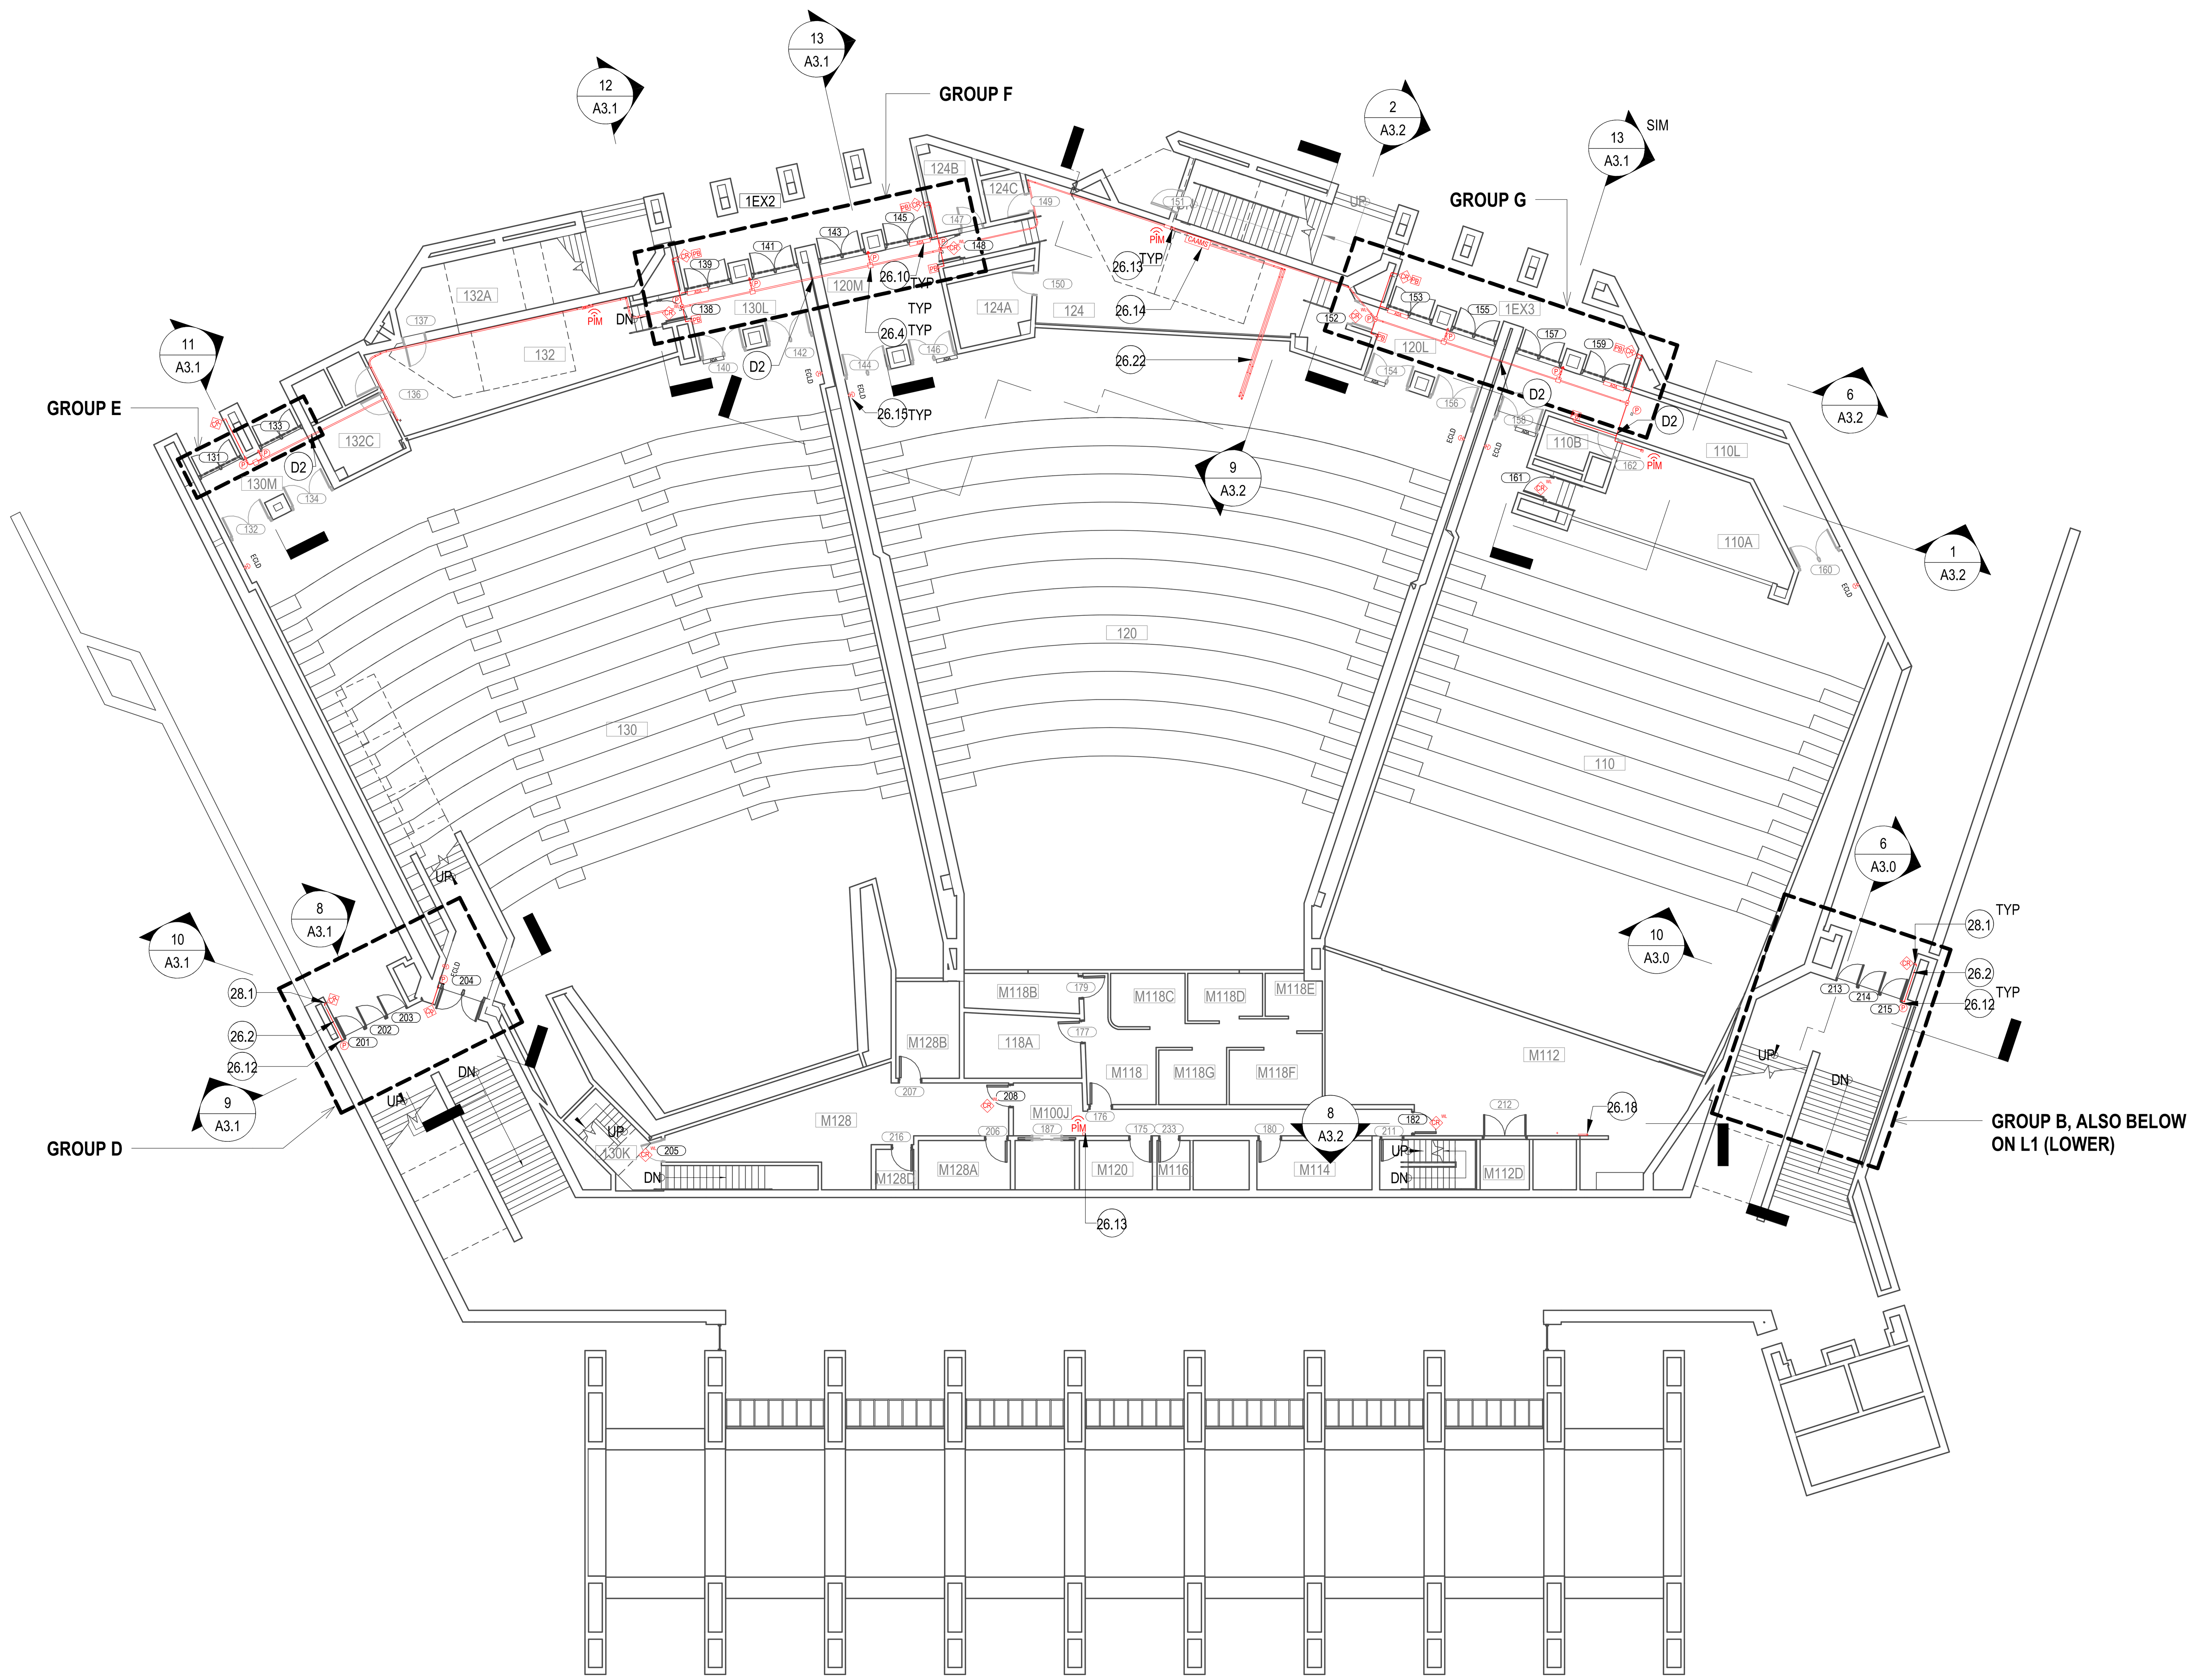

KEYNOTES

KEY	NOTE
26.2	WIRING; ROUTE WITHIN EMT IF EXPOSED/SURFACE MOUNTED; USE FLEXIBLE METAL CONDUIT TO ROUTE CONDUIT WITHIN (E) 1 1/2" BRICK VENEER CAVITY (SALVAGE & REINSTALL (E) BRICK AS REQUIRED); USE OPEN CABLING WITH CEILING MOUNTED J-HOOKS @ 48" OC FOR LOW-VOLTAGE WIRING ABOVE CEILING. REF ELEC
26.4	8"x8" ELEC BOX, REF ELEC
26.10	REINSTALL SALVAGED ADA OPERATOR
26.12	PIEZO SOUNDER W/IN RECESSED BOX. ROUTE LOW-VOTAGE WIRING AND FLEXIBLE METAL CONDUIT TO CONTROL BOX, REF ELEC
26.13	PANEL INTERFACE MODULE (PIM), REF ELEC
26.14	ACCESS CONTROL PANEL, REF ELEC
26.15	EMERGENCY CLASS LOCKDOWN BUTTON, SALVAGE & REINSTALL (E) FINISHES AS REQ TO INSTALL RECESSED BOX AND RECESS LOW-VOLTAGE WIRING, REF ELEC
26.18	ROUTE WIRING TO ROOM ON SECOND FLOOR
26.22	(2) 2" CONDUITS ROUTE FROM FIRST FLOOR (UPPER) TO SECOND FLOOR CAAMS PANEL, REF ELEC
28.1	CARD READER W/ RECESSED ELEC BOX, REF ELEC
D2	DRILL THROUGH (E) CONC WALL (ASSUME 8" THICK) FOR CONDUIT INSTALLATION. PATCH OPENING ONCE CONDUIT IS INSTALLED

SHEET NOTES

1. REF ELEC FOR ADDITIONAL EQUIPMENT
2. CONDUITS SHALL BE CONCEALED IN WALLS, CHASES, ABOVE SUSPENDED CEILINGS, BELOW FLOORS OR BE FURRED-IN IN ROOMS WITH EXISTING CEILINGS, UNLESS OTHERWISE NOTED.
3. REF SPEC FOR FIRESTOPPING REQUIREMENTS AT WALL PENETRATIONS
4. REFER TO ELEVATIONS AND SECTIONS FOR ADDITIONAL WORK NOT INDICATED IN PLAN
5. REFER TO SECTION 00 31 00 (AVAILABLE INFORMATION) FOR ADDITIONAL EXISTING CONDITION INFORMATION

PLAN LEGEND

	(E) WALL
DOOR	DOOR TAG, REF SCHEDULE
CAAMS	ACCESS CONTROL PANEL
PIM	PANEL INTERFACE MODULE
	CEILING ACCESS HATCH
	8" X 8" ELECTRICAL BOX
	12" X 12" ELECTRICAL BOX
ADA	SALVAGE & REINSTALL (E) ADA OPERATOR & ASSOCIATED PUSH BUTTONS
	WIRING, REF KEYNOTE: INSTALL ABOVE CEILING OR BEHIND BRICK VENEER IN PUBLIC SPACES. IT'S ACCEPTABLE TO SURFACE-MOUNT CONDUIT WITHIN ROOMS: 026, 030, 045, 100A, 110A, 112, 118, 118A, 124, 128, 132, 136, 212, 211, 221
CR WL	WIRELESS CARD READER
CR	CARD READER
PB	ADA PUSH BUTTON
P	PIEZO SOUNDER, INSTALL IN RECESSED BOX WITHIN (E) BRICK VENEER, (E) WD TRIM, OR (E) GWB CLG, REF ELEV
ECLD	EMERGENCY CLASS LOCKDOWN (ECLD); RECESS WITHIN (E) FINISHES, SALVAGE & REINSTALL (E) FINISHES AS REQUIRED TO ROUTE WIRING (IN CONCEALED MANNER) BACK TO CAAMS PANEL

1 FIRST FLOOR (UPPER) & MEZZ

SCALE: 1/16" = 1'-0"

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT JONATHAN H. HARTUNG STATE OF WASHINGTON

KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

FIRST FLOOR (UPPER)

SHEET No.

A2.1.2

4/14/2026 10:14:23 AM

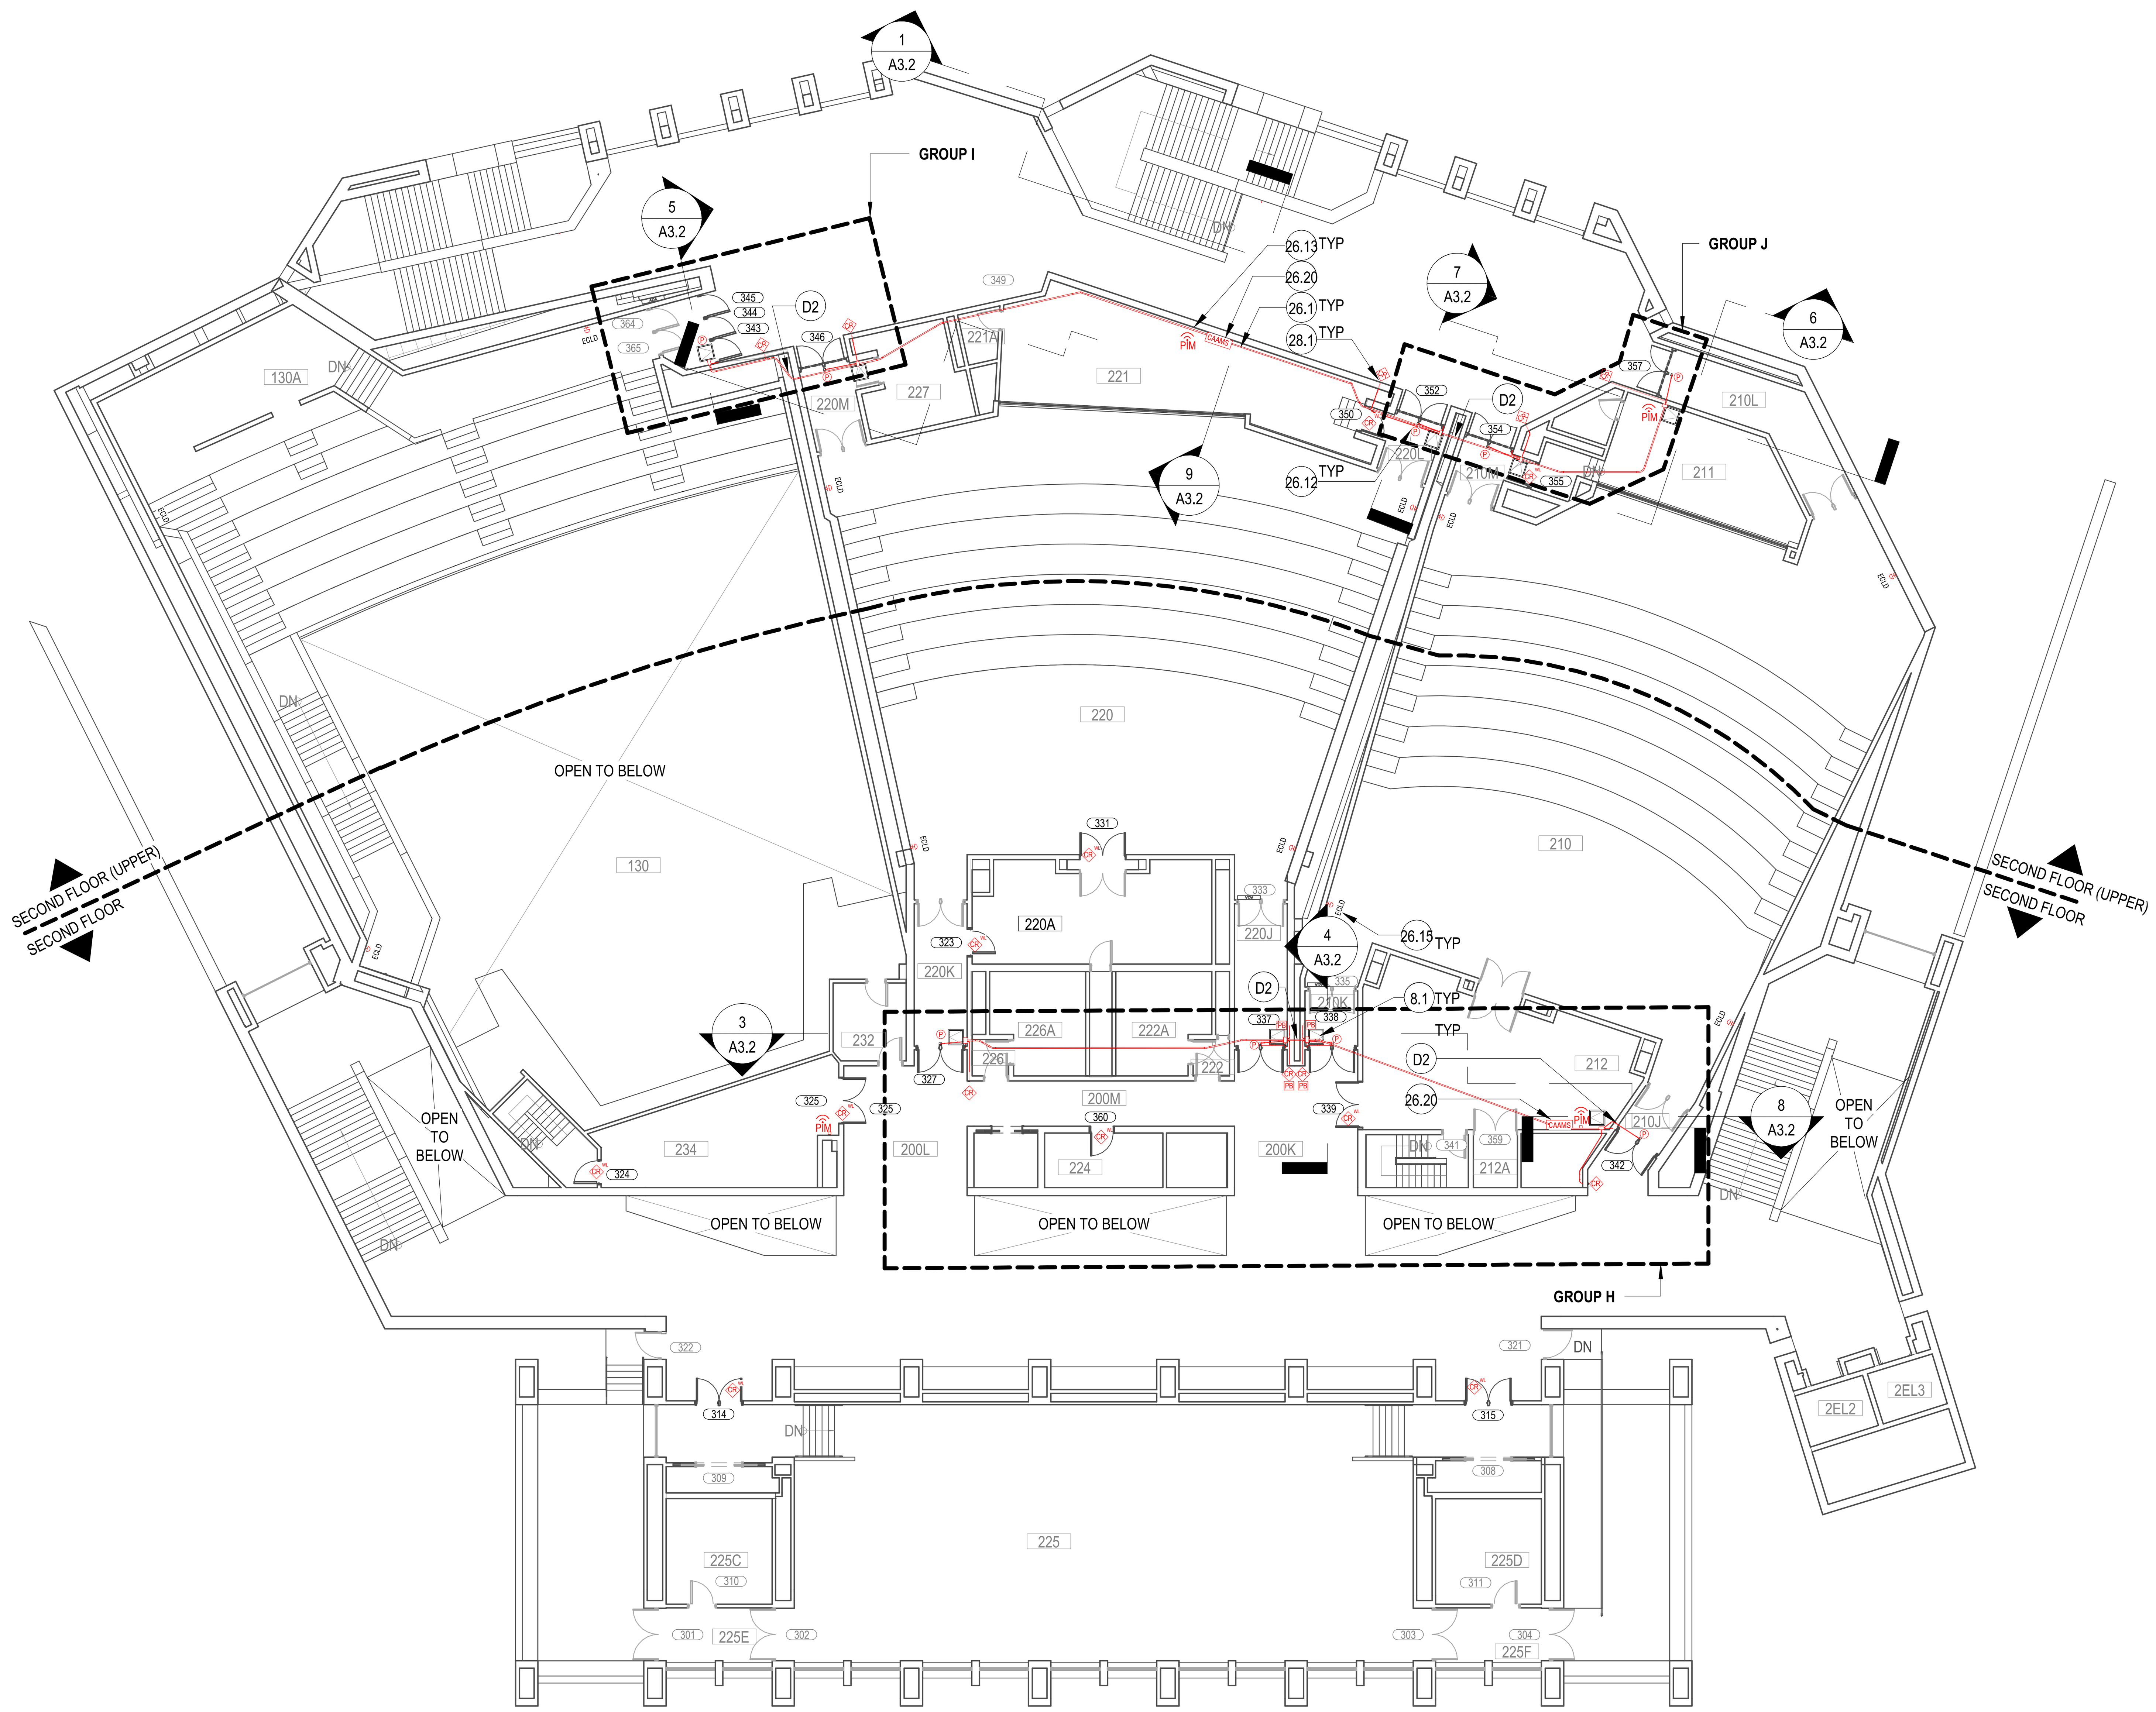

KEYNOTES

KEY	NOTE
8.1	18" x 18" ACCESS HATCH W/IN (E) GWB CEILING
26.1	EMT ELEC CONDUIT, REF ELEC
26.12	PIEZO SOUNDER W/IN RECESSED BOX. ROUTE LOW-VOTAGE WIRING AND FLEXIBLE METAL CONDUIT TO CONTROL BOX, REF ELEC
26.13	PANEL INTERFACE MODULE (PIM), REF ELEC
26.15	EMERGENCY CLASS LOCKDOWN BUTTON, SALVAGE & REINSTALL (E) FINISHES AS REQ TO INSTALL RECESSED BOX AND RECESS LOW-VOLTAGE WIRING, REF ELEC
26.20	CAAMS PANEL, REF ELEC
28.1	CARD READER W/ RECESSED ELEC BOX, REF ELEC
D2	DRILL THROUGH (E) CONC WALL (ASSUME 8" THICK) FOR CONDUIT INSTALLATION. PATCH OPENING ONCE CONDUIT IS INSTALLED

SHEET NOTES

1. REF ELEC FOR ADDITIONAL EQUIPMENT
2. CONDUITS SHALL BE CONCEALED IN WALLS, CHASES, ABOVE SUSPENDED CEILINGS, BELOW FLOORS OR BE FURRED-IN IN ROOMS WITH EXISTING CEILINGS, UNLESS OTHERWISE NOTED.
3. REF SPEC FOR FIRESTOPPING REQUIREMENTS AT WALL PENETRATIONS
4. REFER TO ELEVATIONS AND SECTIONS FOR ADDITIONAL WORK NOT INDICATED IN PLAN
5. REFER TO FINISH PLANS, FFE PLANS, AND SCHEDULE FOR ADDITIONAL FINISH INFORMATION

PLAN LEGEND

	(E) WALL
DOOR	DOOR TAG, REF SCHEDULE
CAAMS	ACCESS CONTROL PANEL
PIM	PANEL INTERFACE MODULE
	CEILING ACCESS HATCH
	8" X 8" ELECTRICAL BOX
	12" X 12" ELECTRICAL BOX
ADA	SALVAGE & REINSTALL (E) ADA OPERATOR & ASSOCIATED PUSH BUTTONS
	WIRING, REF KEYNOTE: INSTALL ABOVE CEILING OR BEHIND BRICK VENEER IN PUBLIC SPACES. IT'S ACCEPTABLE TO SURFACE-MOUNT CONDUIT WITHIN ROOMS: 026, 030, 045, 100A, 110A, 112, 118, 118A, 124, 128, 132, 136, 212, 211, 221
CR WL	WIRELESS CARD READER
CR	CARD READER
PB	ADA PUSH BUTTON
P	PIEZO SOUNDER, INSTALL IN RECESSED BOX WITHIN (E) BRICK VENEER, (E) WD TRIM, OR (E) GWB CLG, REF ELEV
ECLD	EMERGENCY CLASS LOCKDOWN (ECLD); RECESS WITHIN (E) FINISHES, SALVAGE & REINSTALL (E) FINISHES AS REQUIRED TO ROUTE WIRING (IN CONCEALED MANNER) BACK TO CAAMS PANEL

1 SECOND FLOOR

SCALE: 1/16" = 1'-0"

0 1' 2' 4' 8' 12'

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ

PH: 206.675.9151
info@shksarchitects.com

1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN



REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

SECOND FLOOR PLAN

SHEET No.

A2.2.1

4/14/2026 10:14:25 AM

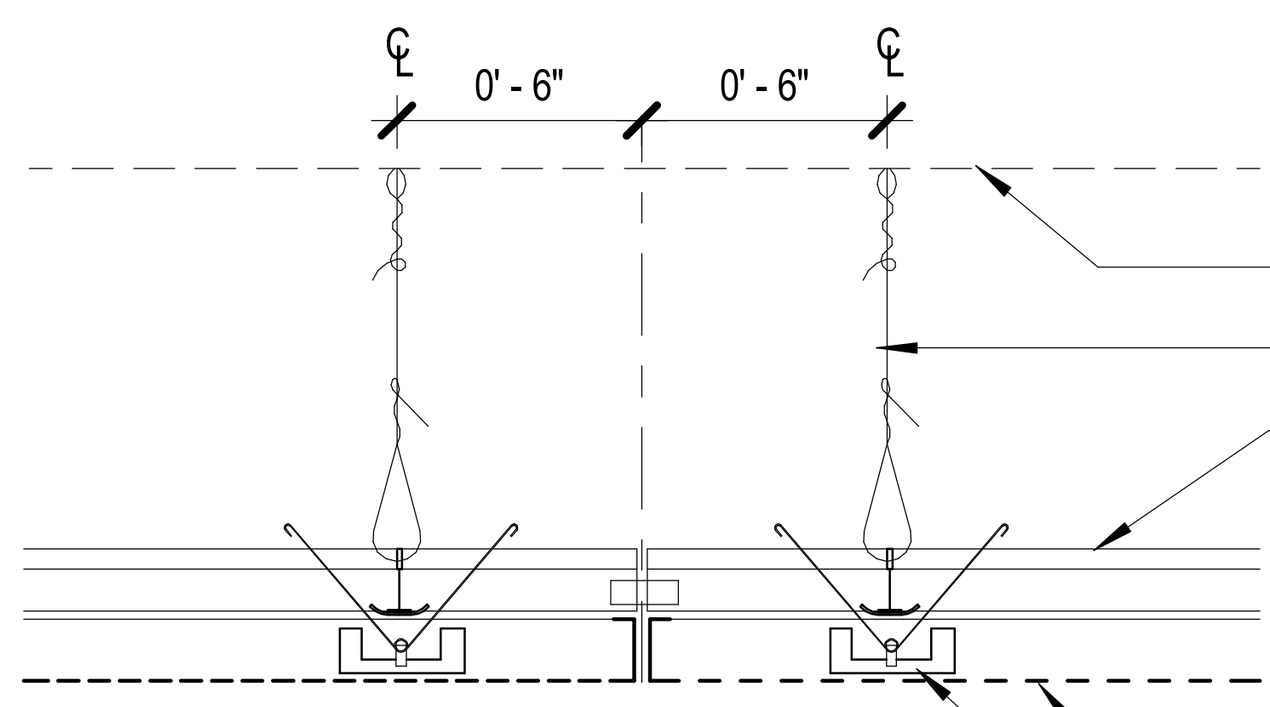

0 C1 PERFORATED METAL SUSPENDED CEILING

SCALE: 1 1/2" = 1'-0"

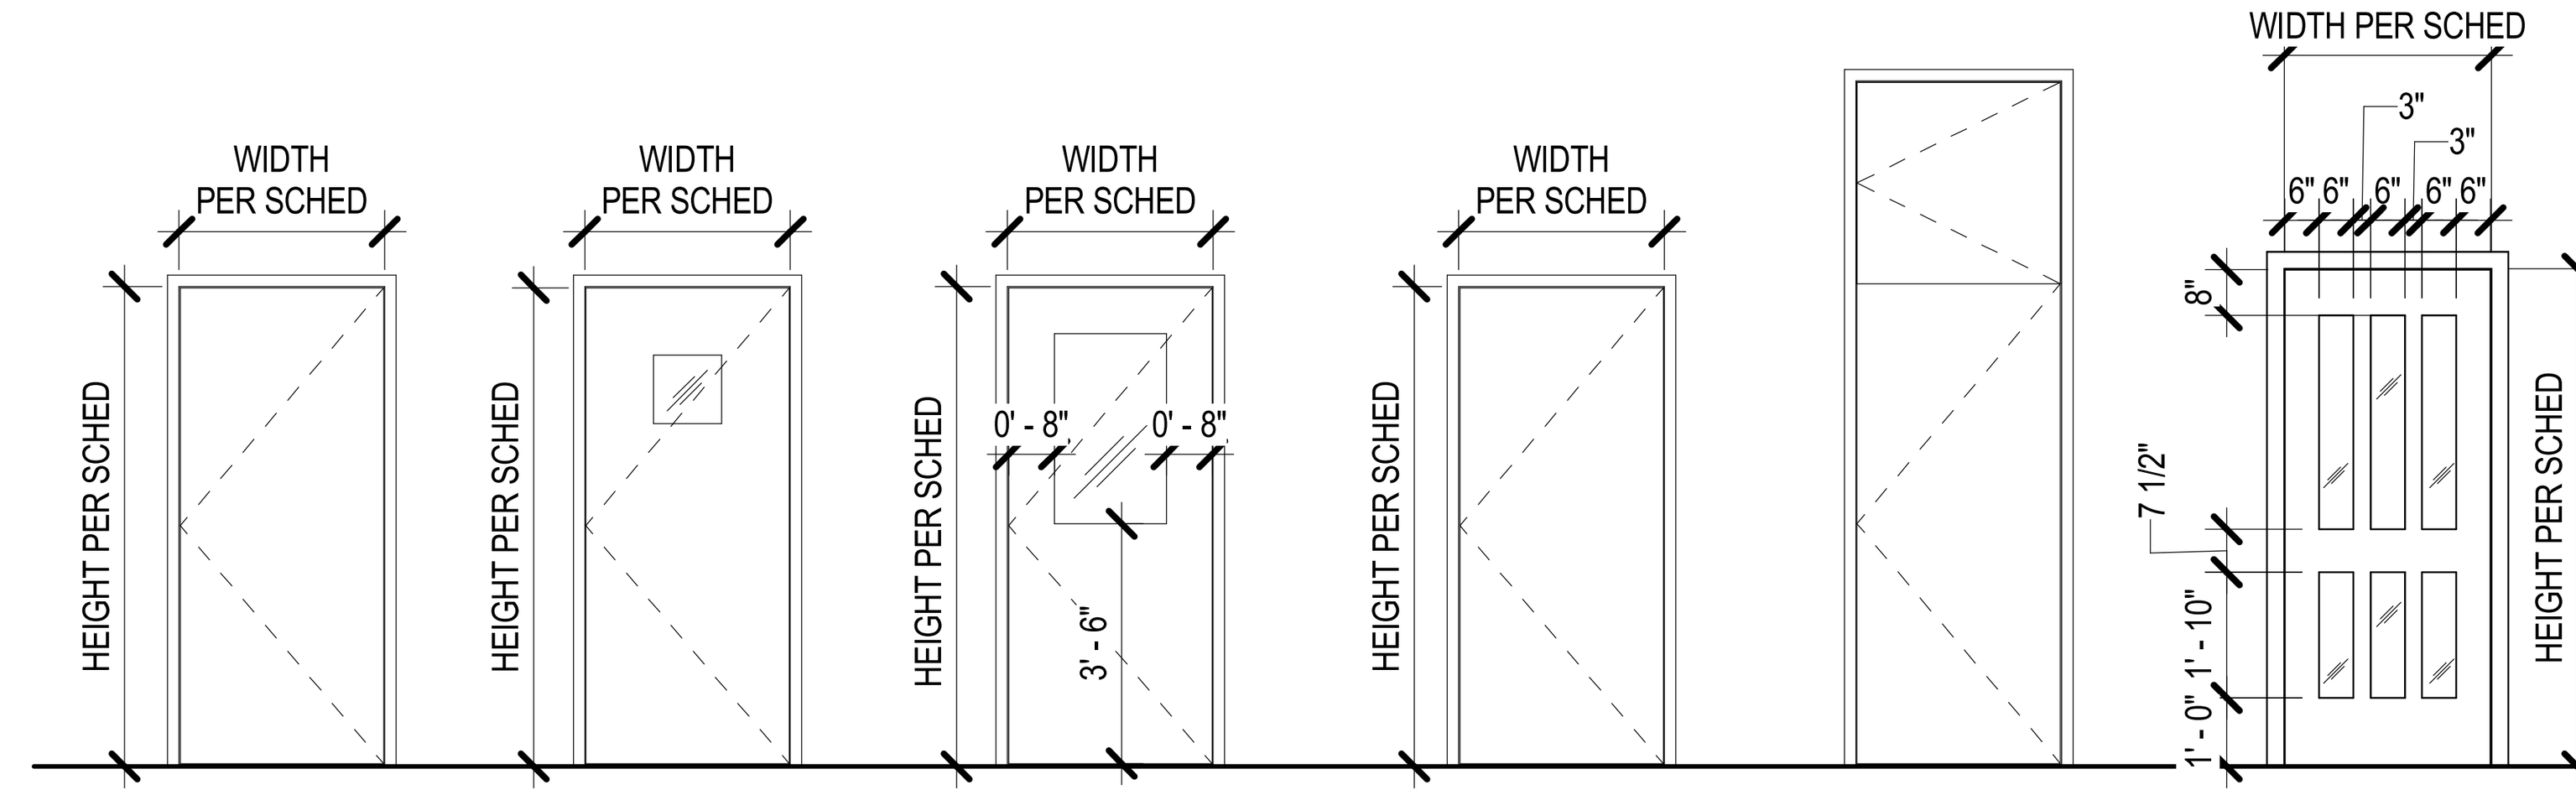

A2-DOOR TYPE LEGEND

SCALE: 1/4" = 1'-0"

NOTES:
1. DOORS ARE (E) TO REMAIN
2. REPLACEMENT HARDWARE TO BE ADA COMPLIANT
3. NO CHANGE TO EXISTING EMERGENCY EGRESS. (E) DOORS SHALL RECEIVE REPLACEMENT PANIC HARDWARE
4. EMERGENCY LOCKDOWN DEVICES WILL NOT OVERRIDE MECHANICAL OPERATION OF LATCH, SO CANNOT PREVENT PEOPLE FROM EXITING
5. ADA OPERATORS AND PUSH BUTTONS ARE EXISTING, BUT WILL BE SALVAGED AND REINSTALLED
6. FOR DOORS IN SEQUENCE WITH (E) ADA OPERATORS, ROUTE CONDUIT BETWEEN (E) ADA OPERATORS TO COORDINATE DOOR OPERATION

DOOR SCHEDULE

				PANEL						FRAME								
LEVEL	DOOR GROUP (REF PLAN)	MARK	HARDWARE SET	TYPE	WIDTH	HEIGHT	THICKNESS	MATERIAL	FINISH	MATERIAL	FINISH	(E) CLOSER & LATCH	ELECTRIFIED PANIC HARDWARE, TRANSFER HINGE, & PIEZO SOUNDER	CARD READER	WIRELESS LOCKSET W/ INTEGRAL CARDREADER	(E) ADA OPERATOR & PUSH BUTTONS (SALVAGE & REINSTALL)	MARK	COMMENTS
FIRST FLOOR																		
FIRST FLOOR	A	101	01	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			101	
FIRST FLOOR	A	102	02	H	6' - 0"	7' - 10 1/2"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				102	CONNECT TO CARDREADER ADJACENT TO DOOR 101 & 107
FIRST FLOOR	A	103	02	H	6' - 0"	7' - 10 1/2"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				103	CONNECT TO CARDREADER ADJACENT TO DOOR 101 & 107
FIRST FLOOR	A	104	02	H	6' - 0"	7' - 10 1/2"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				104	CONNECT TO CARDREADER ADJACENT TO DOOR 101 & 107
FIRST FLOOR	A	105	02	H	6' - 0"	7' - 10 1/2"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				105	CONNECT TO CARDREADER ADJACENT TO DOOR 101 & 107
FIRST FLOOR	A	106	02	H	6' - 0"	7' - 10 1/2"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				106	CONNECT TO CARDREADER ADJACENT TO DOOR 101 & 107
FIRST FLOOR	A	107	01	H	6' - 0"	7' - 10 1/2"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	107	
FIRST FLOOR	B	109	03	H	3' - 0"	8' - 0"	2 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				109	CONNECT TO CARDREADER ADJACENT TO DOOR 111
FIRST FLOOR	B	110	03	H	3' - 0"	8' - 0"	2 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				110	CONNECT TO CARDREADER ADJACENT TO DOOR 111
FIRST FLOOR	B	111	04	H	3' - 0"	8' - 0"	2 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	111	
FIRST FLOOR	C	115a	05	D	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		115a	
FIRST FLOOR	C	115b	05	D	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		115b	
FIRST FLOOR	C	125	05	D	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		125	
FIRST FLOOR	C	126A	06	A	3' - 0"	7' - 2"	1 3/4"	(E) HM	(E), NO CHANGE	(E) HM	(E), NO CHANGE	●			●		126A	
FIRST FLOOR	C	126B	06	A	3' - 0"	7' - 2"	1 3/4"	(E) HM	(E), NO CHANGE	(E) HM	(E), NO CHANGE	●			●		126B	
FIRST FLOOR	C	127	05	D	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE				●		127	
FIRST FLOOR	C	164	01	F	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			164	
FIRST FLOOR	C	165	01	F	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	165	CONNECT REINSTALLED ADA ACTUATOR TO CONTROLS SERVING EXISTING DOOR 124
FIRST FLOOR	C	166	01	F	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	166	CONNECT REINSTALLED ADA ACTUATOR TO CONTROLS SERVING EXISTING DOOR 122
FIRST FLOOR	C	167	01	F	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	167	CONNECT REINSTALLED ADA ACTUATOR TO CONTROLS SERVING EXISTING DOOR 119
FIRST FLOOR	C	168	01	F	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	168	CONNECT REINSTALLED ADA ACTUATOR TO CONTROLS SERVING EXISTING DOOR 114
FIRST FLOOR	C	169	01	F	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			169	
FIRST FLOOR MEZZ																		
FIRST FLOOR MEZZ		182	06	A	3' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) HM	(E), NO CHANGE	●			●		182	
FIRST FLOOR MEZZ		205	06	A	3' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) HM	(E), NO CHANGE	●			●		205	
FIRST FLOOR MEZZ		208	06	A	3' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) HM	(E), NO CHANGE	●			●		208	
FIRST FLOOR_UPPER																		
FIRST FLOOR_UPPER	E	131	01	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			131	
FIRST FLOOR_UPPER	E	133	02	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				133	CONNECT TO CARDREADER ADJACENT TO DOOR 131
FIRST FLOOR_UPPER	F	138	06	A	3' - 3"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		138	
FIRST FLOOR_UPPER	F	139	01	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	139	
FIRST FLOOR_UPPER	F	141	02	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				141	CONNECT TO CARDREADER ADJACENT TO DOOR 141
FIRST FLOOR_UPPER	F	143	02	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				143	CONNECT TO CARDREADER ADJACENT TO DOOR 145
FIRST FLOOR_UPPER	F	145	01	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	145	
FIRST FLOOR_UPPER	F	148	06	A	3' - 3"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		148	
FIRST FLOOR_UPPER	G	152	06	A	3' - 3"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		152	
FIRST FLOOR_UPPER	G	153	01	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	153	CONNECT REINSTALLED ADA ACTUATOR TO CONTROLS SERVING EXISTING DOOR 154
FIRST FLOOR_UPPER	G	155	02	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				155	CONNECT TO CARDREADER ADJACENT TO DOOR 153
FIRST FLOOR_UPPER	G	157	02	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				157	CONNECT TO CARDREADER ADJACENT TO DOOR 159
FIRST FLOOR_UPPER	G	159	01	H	6' - 0"	8' - 0"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	159	CONNECT REINSTALLED ADA ACTUATOR TO CONTROLS SERVING EXISTING DOOR 158
FIRST FLOOR_UPPER		161	06	A	3' - 3"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		161	
FIRST FLOOR_UPPER	D	201	04	H	3' - 0"	8' - 0"	2 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			201	
FIRST FLOOR_UPPER	D	202	03	H	3' - 0"	8' - 0"	2 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				202	CONNECT TO CARDREADER ADJACENT TO DOOR 201
FIRST FLOOR_UPPER	D	203	03	H	3' - 0"	8' - 0"	2 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				203	CONNECT TO CARDREADER ADJACENT TO DOOR 201
FIRST FLOOR_UPPER	D	204	01	F	6' - 0"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			204	
FIRST FLOOR_UPPER	B	213	03	H	3' - 0"	8' - 0"	2 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				213	
FIRST FLOOR_UPPER	B	214	03	H	3' - 0"	8' - 0"	2 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●				214	
FIRST FLOOR_UPPER	B	215	04	H	3' - 0"	8' - 0"	2 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			215	
SECOND FLOOR																		
SECOND FLOOR		314	05	F	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		314	
SECOND FLOOR		315	05	F	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		315	
SECOND FLOOR		323	06	A	3' - 6"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		323	
SECOND FLOOR		324	06	A	3' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) HM	(E), NO CHANGE	●			●		324	
SECOND FLOOR		325	05	F	6' - 0"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		325	
SECOND FLOOR	H	327	01	F	6' - 0"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			327	
SECOND FLOOR		331	05	F	6' - 0"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		331	
SECOND FLOOR	H	337	01	F	6' - 0"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	337	CONNECT REINSTALLED ADA ACTUATOR TO CONTROLS SERVING EXISTING DOOR 333
SECOND FLOOR	H	338	01	F	6' - 0"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●		●	338	CONNECT REINSTALLED ADA ACTUATOR TO CONTROLS SERVING EXISTING DOOR 335
SECOND FLOOR		339	05	F	6' - 0"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		339	
SECOND FLOOR	H	342	01	F	6' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			342	
SECOND FLOOR		360	06	A	3' - 0"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		360	
SECOND FLOOR (UPPER)																		
SECOND FLOOR (UPPER)	I	343	04	A	3' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) HM	(E), NO CHANGE	●	●	●			343	
SECOND FLOOR (UPPER)	I	344	03	A	3' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) HM	(E), NO CHANGE	●	●				344	CONNECT TO CARDREADER ADJACENT TO DOOR 343
SECOND FLOOR (UPPER)	I	345	03	A	3' - 0"	7' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) HM	(E), NO CHANGE	●	●				345	CONNECT TO CARDREADER ADJACENT TO DOOR 343
SECOND FLOOR (UPPER)	I	346	01	H	6' - 0"	8' - 1 3/4"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			346	
SECOND FLOOR (UPPER)		350	06	A	3' - 3"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		350	
SECOND FLOOR (UPPER)	J	352	01	H	6' - 0"	8' - 1 3/4"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			352	
SECOND FLOOR (UPPER)	J	354	01	H	6' - 0"	8' - 1 3/4"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			354	
SECOND FLOOR (UPPER)		355	06	A	3' - 3"	8' - 0"	1 3/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●			●		355	
SECOND FLOOR (UPPER)	J	357	01	H	6' - 0"	8' - 1 3/4"	2 1/4"	(E) SCWD	(E), NO CHANGE	(E) WD	(E), NO CHANGE	●	●	●			357	
Grand total: 67																		

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

ASSEMBLIES & SCHEDULES

SHEET No.

A2.3

4/14/2026 10:14:25 AM

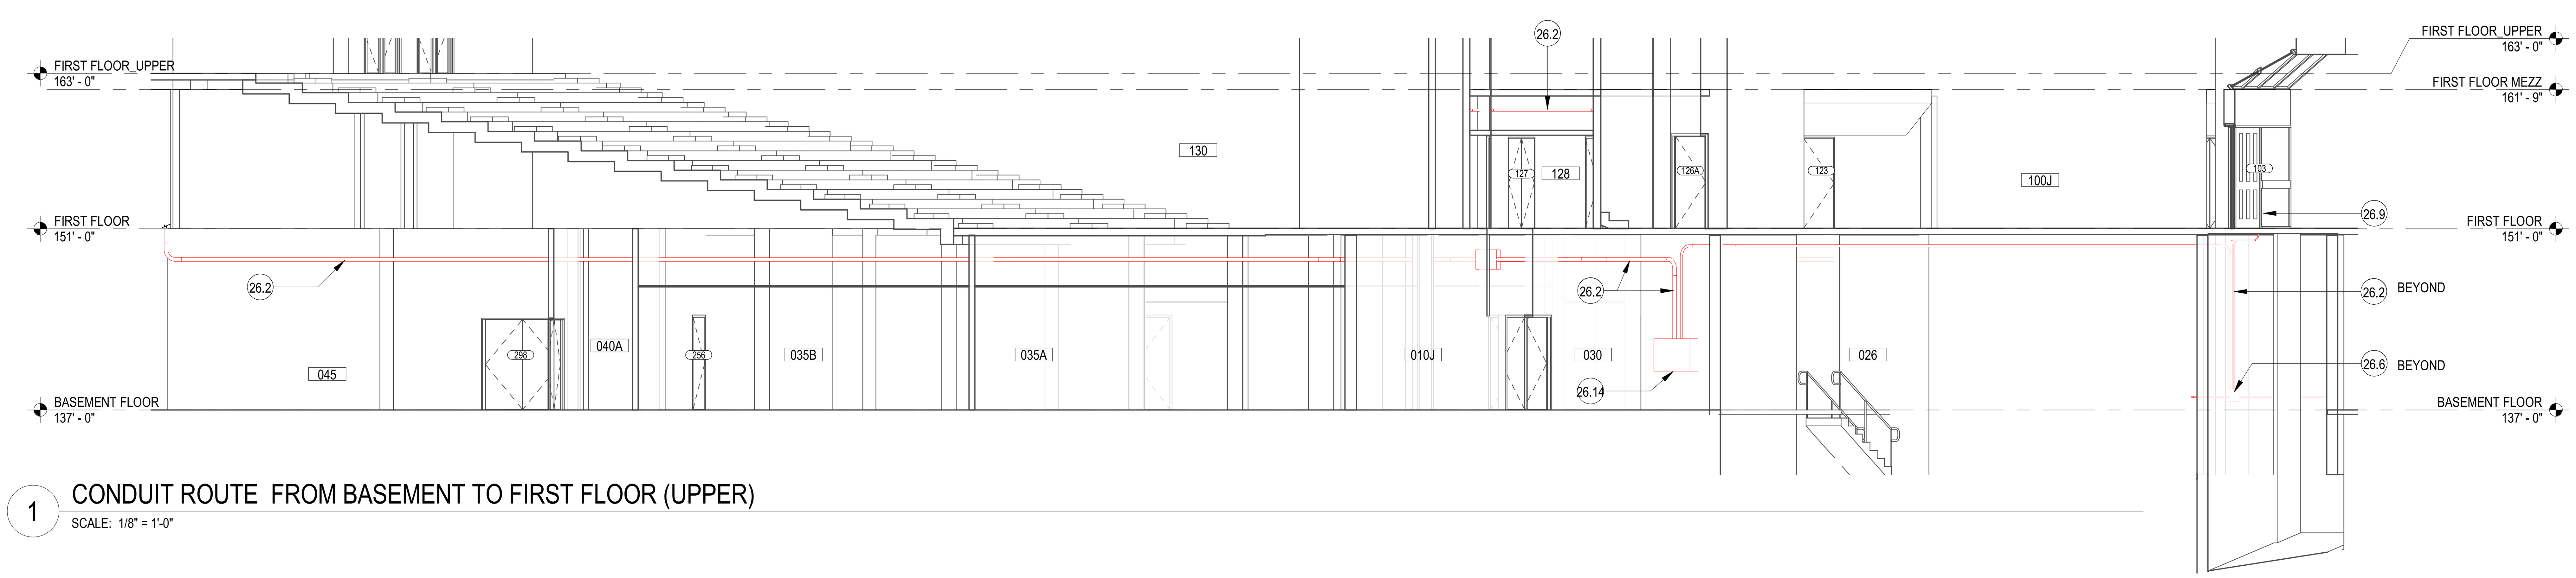

1 CONDUIT ROUTE FROM BASEMENT TO FIRST FLOOR (UPPER)

SCALE: 1/8" = 1'-0"

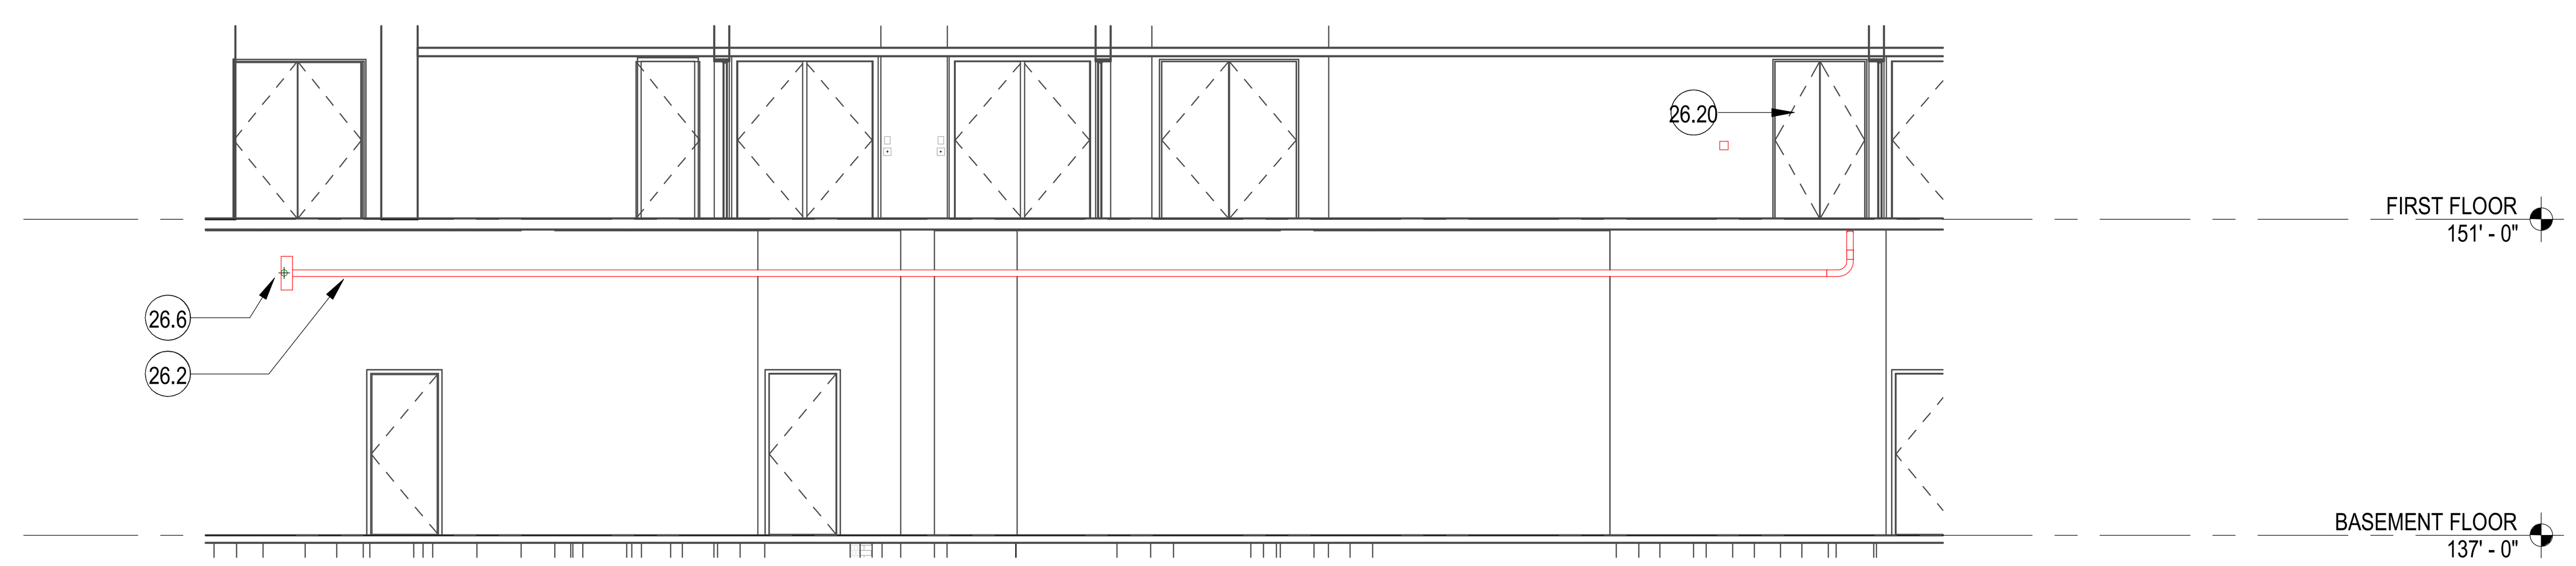

2 CONDUIT ROUTE FROM BASEMENT TO FIRST FLOOR (LOWER)

SCALE: 1/8" = 1'-0"

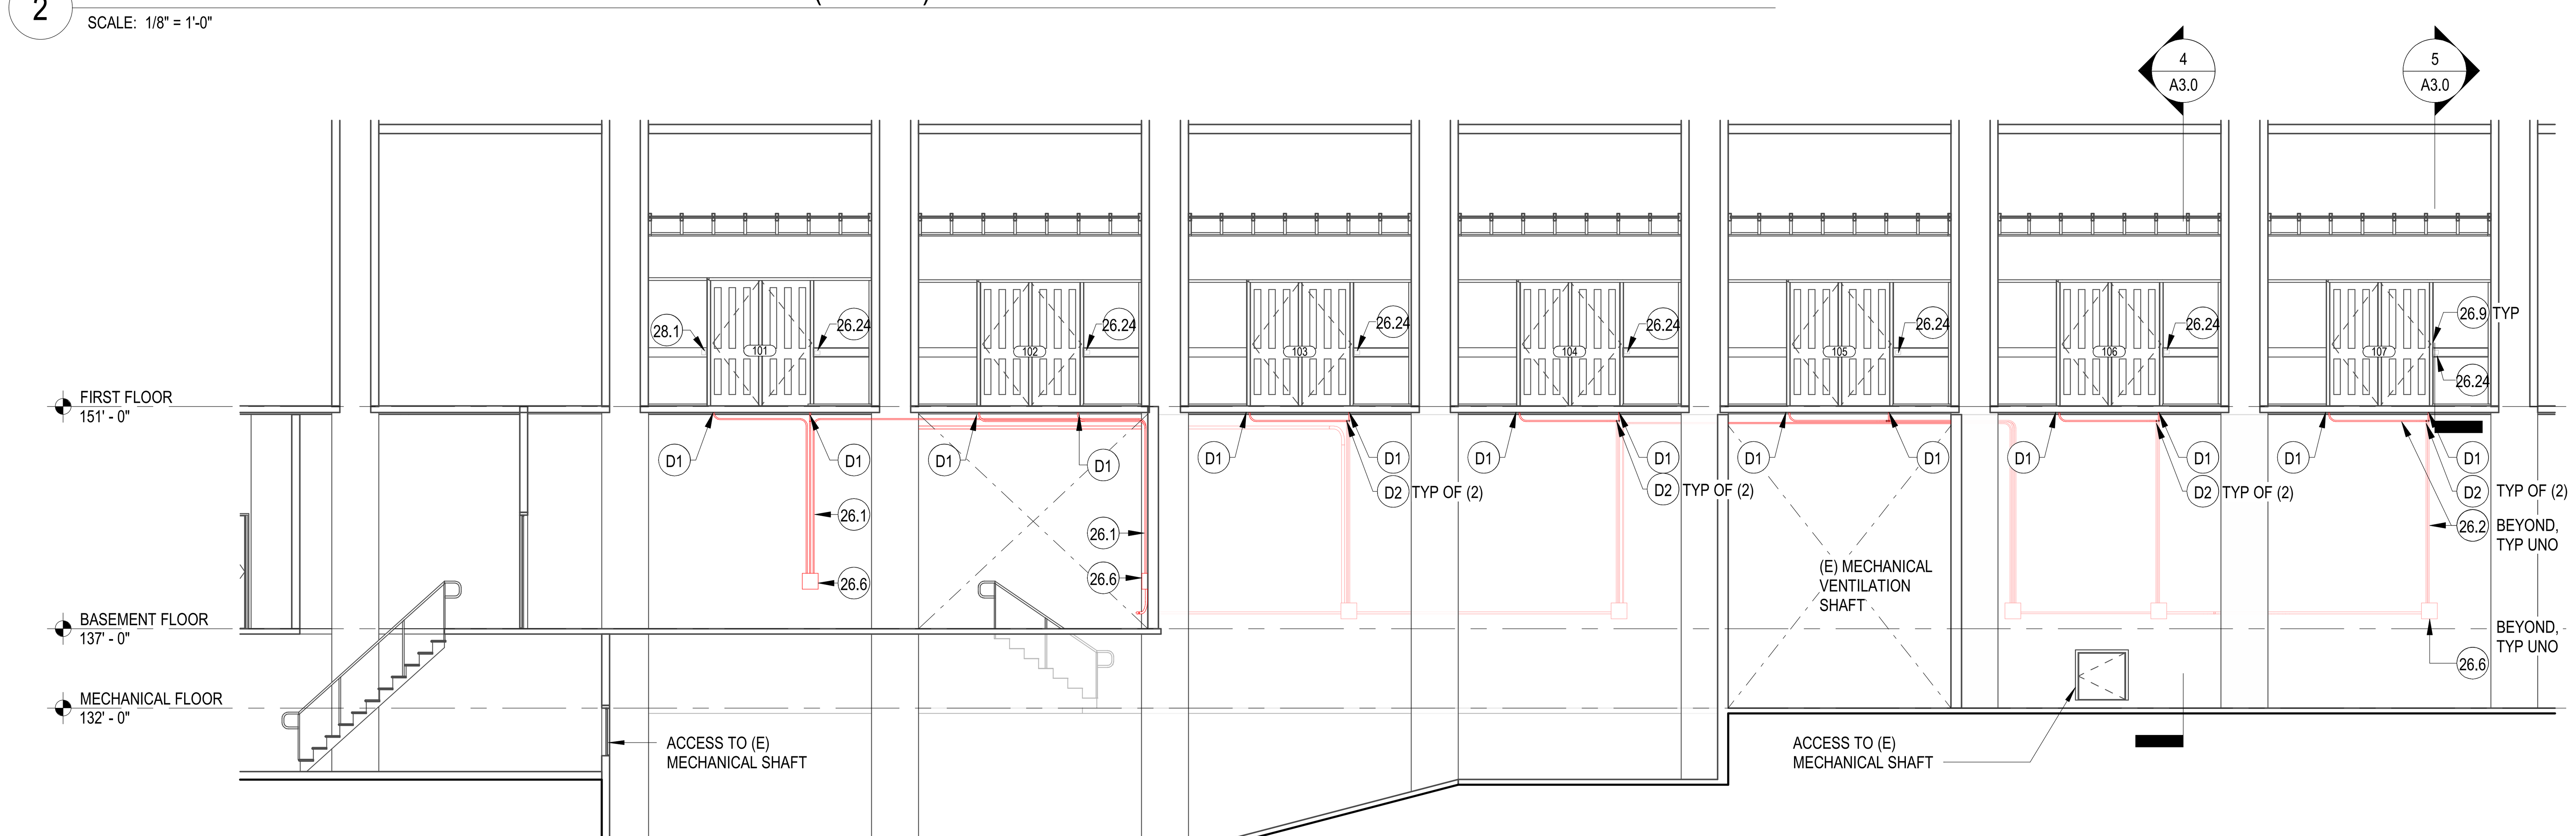

3 GROUP A_LONGITUDINAL SECTION

SCALE: 1/8" = 1'-0"

NOTE: FRONT DOORS TO BE AUTOLOCKED, REFERENCE ELECTRICAL AND SECURITY DRAWINGS FOR ONE LINE DIAGRAM

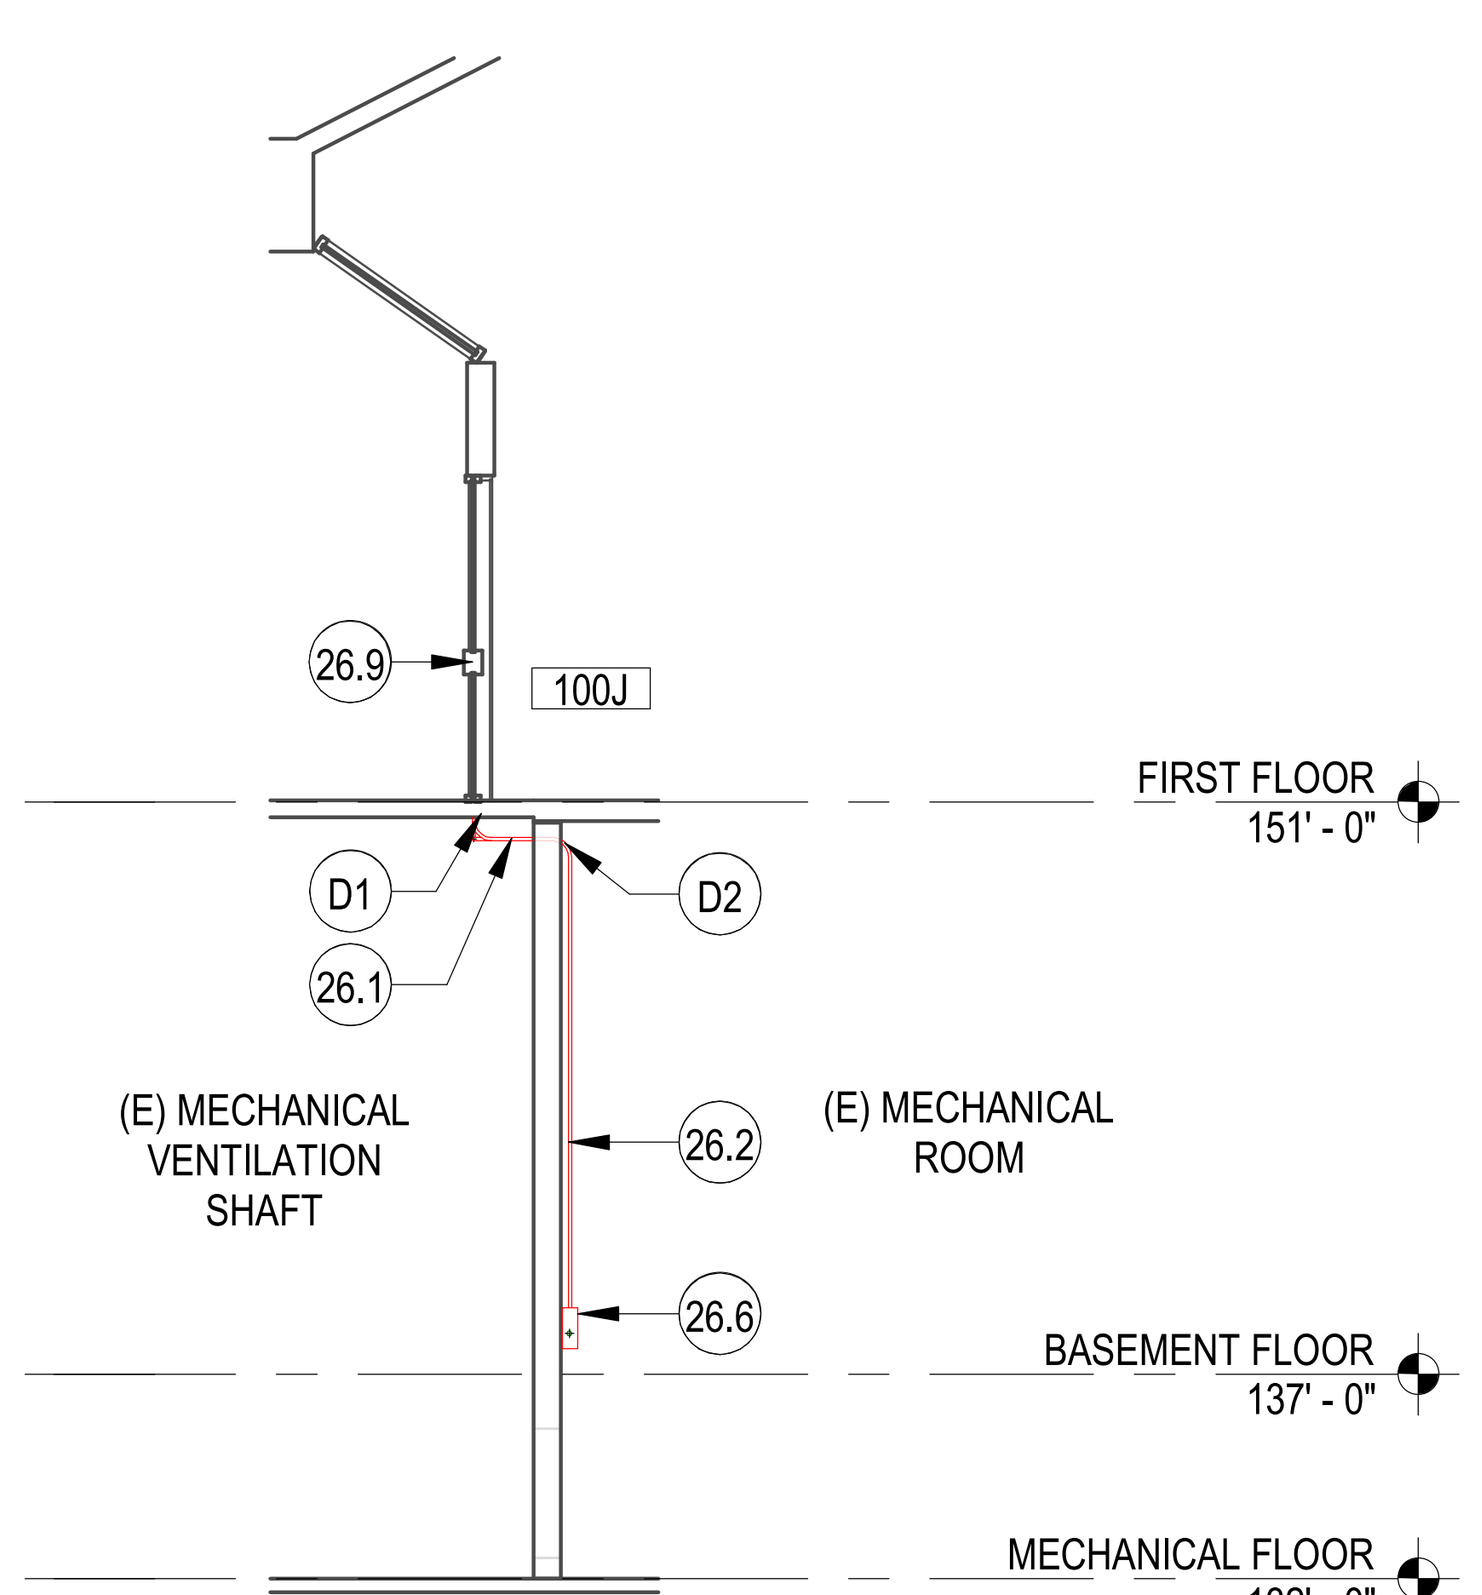

4 GROUP A_TYPICAL SECTION

SCALE: 1/8" = 1'-0"

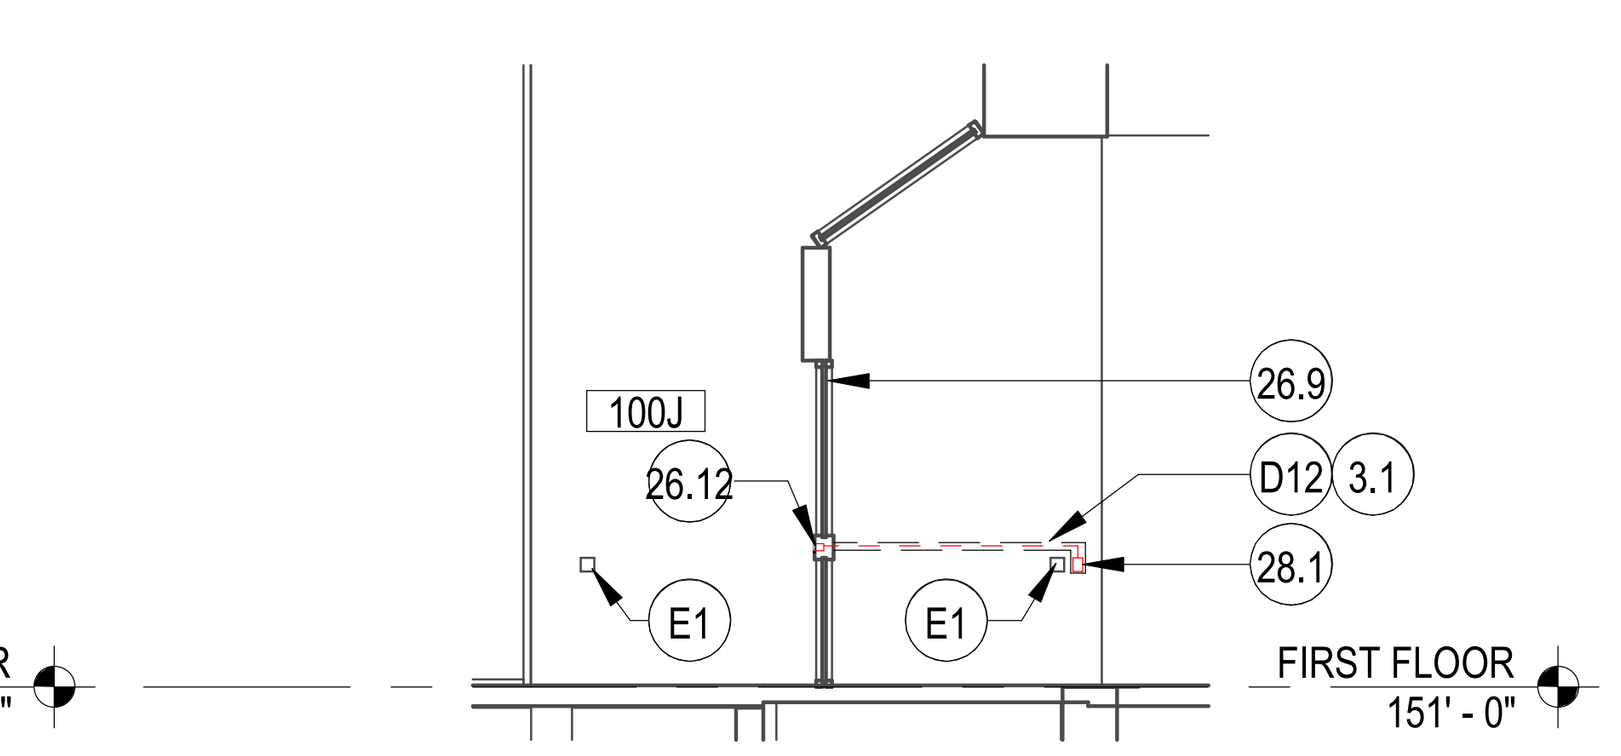

5 DOOR 107 CR & PB

SCALE: 1/8" = 1'-0"

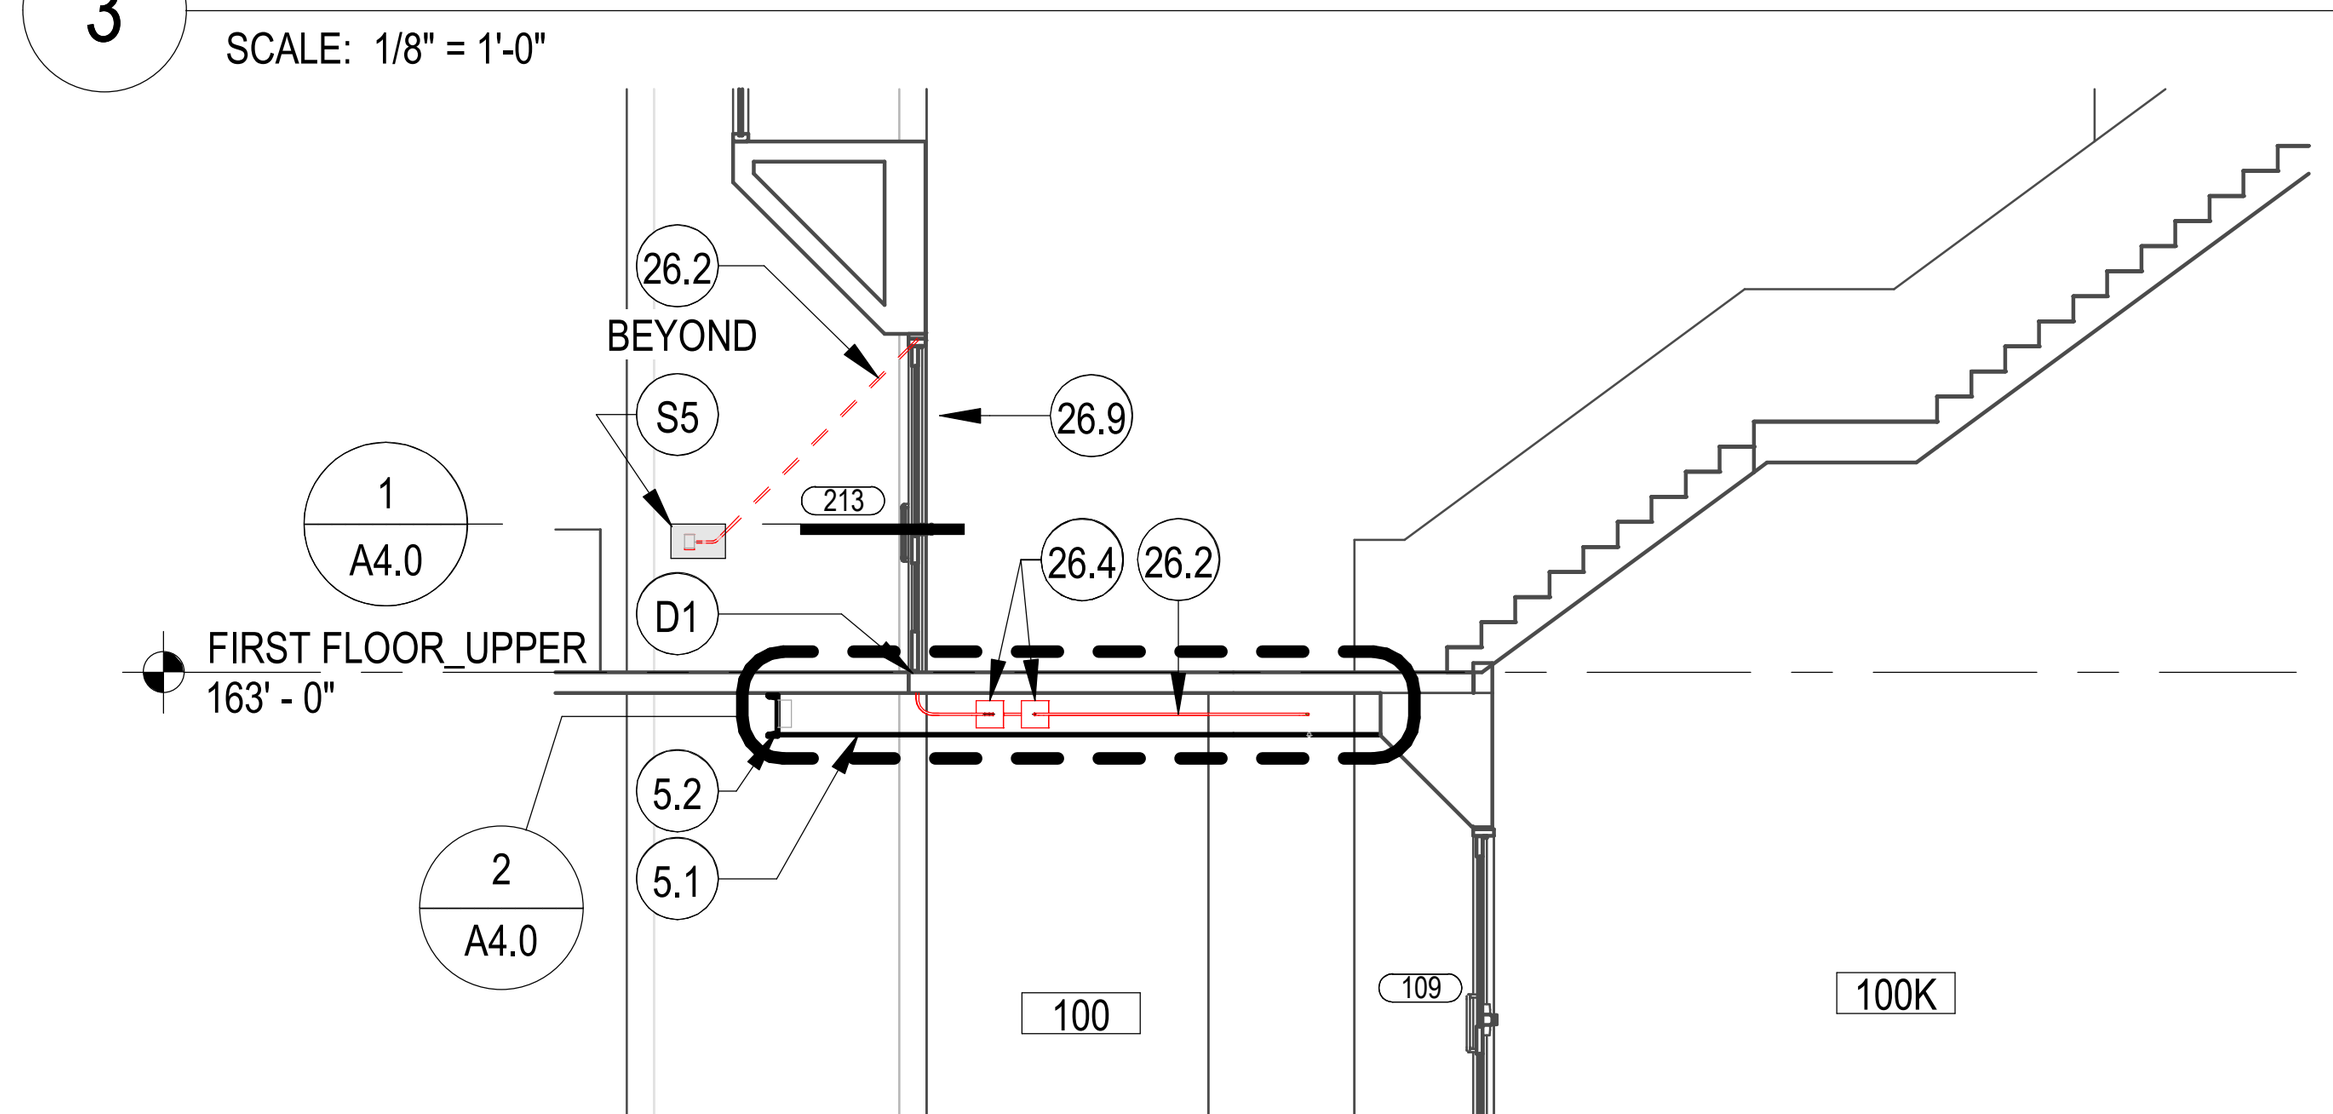

6 GROUP B _LONGITUDINAL SECTION

SCALE: 1/8" = 1'-0"

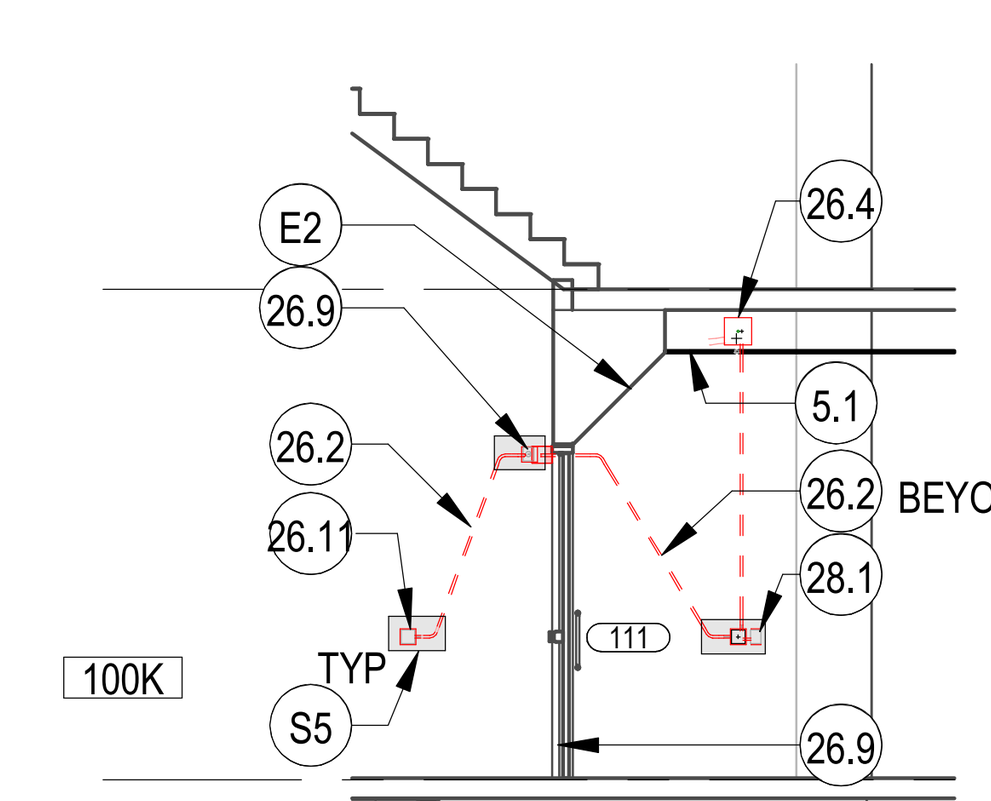

7 GROUP B_WEST SECTION

SCALE: 1/8" = 1'-0"

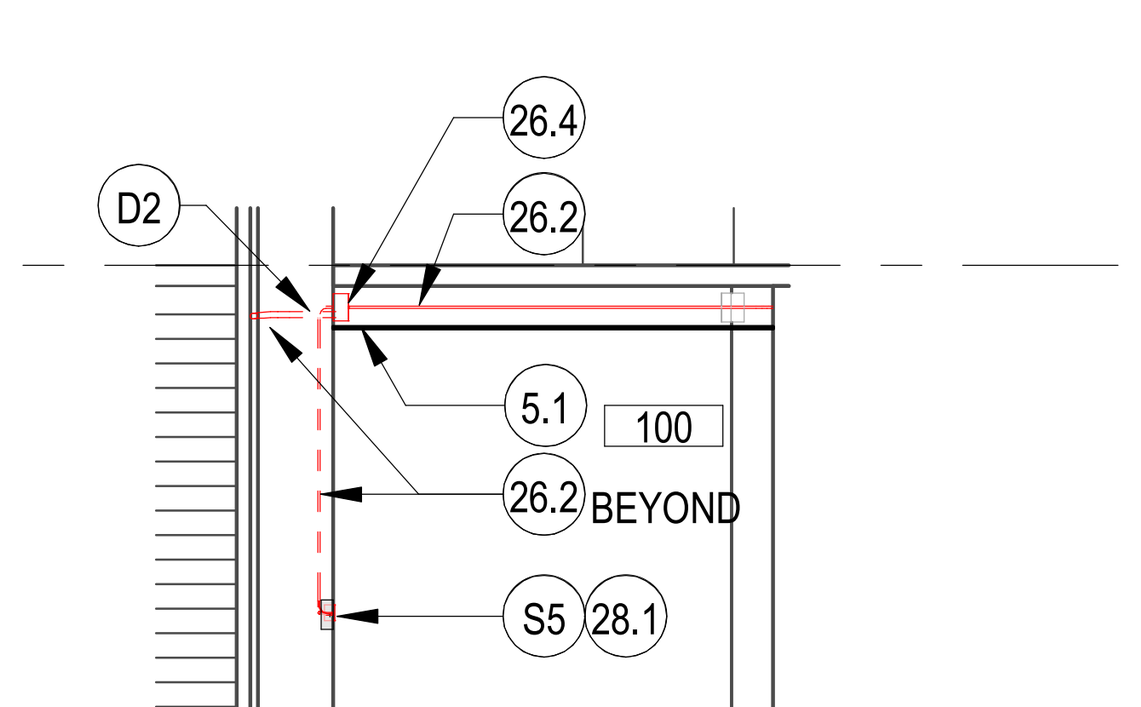

8 GROUP B TO GROUP C WALL PENETRATION

SCALE: 1/8" = 1'-0"

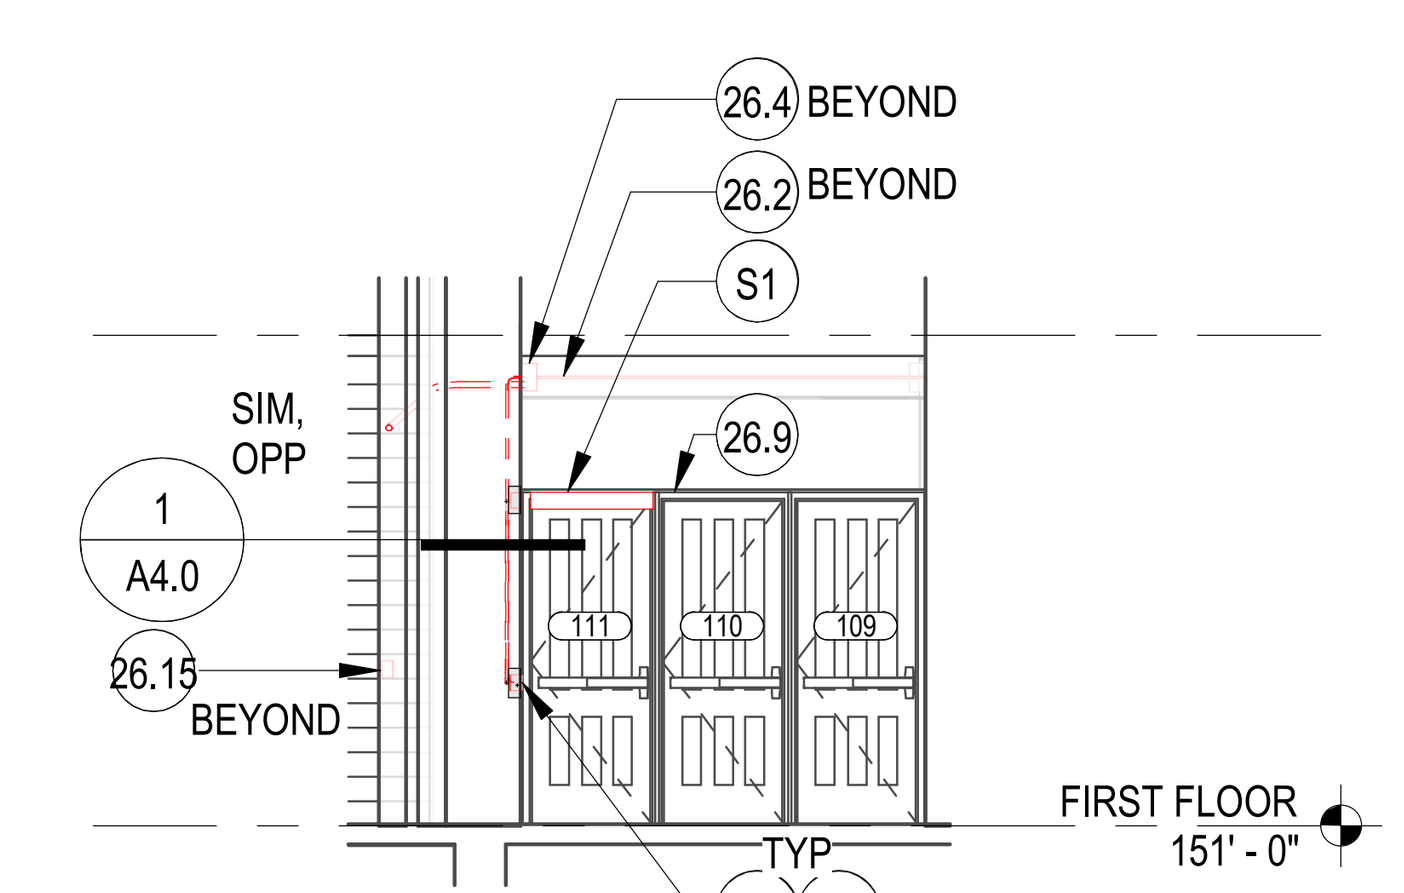

9 GROUP B_TRANSVERSE SECTION AT ENTRY

SCALE: 1/8" = 1'-0"

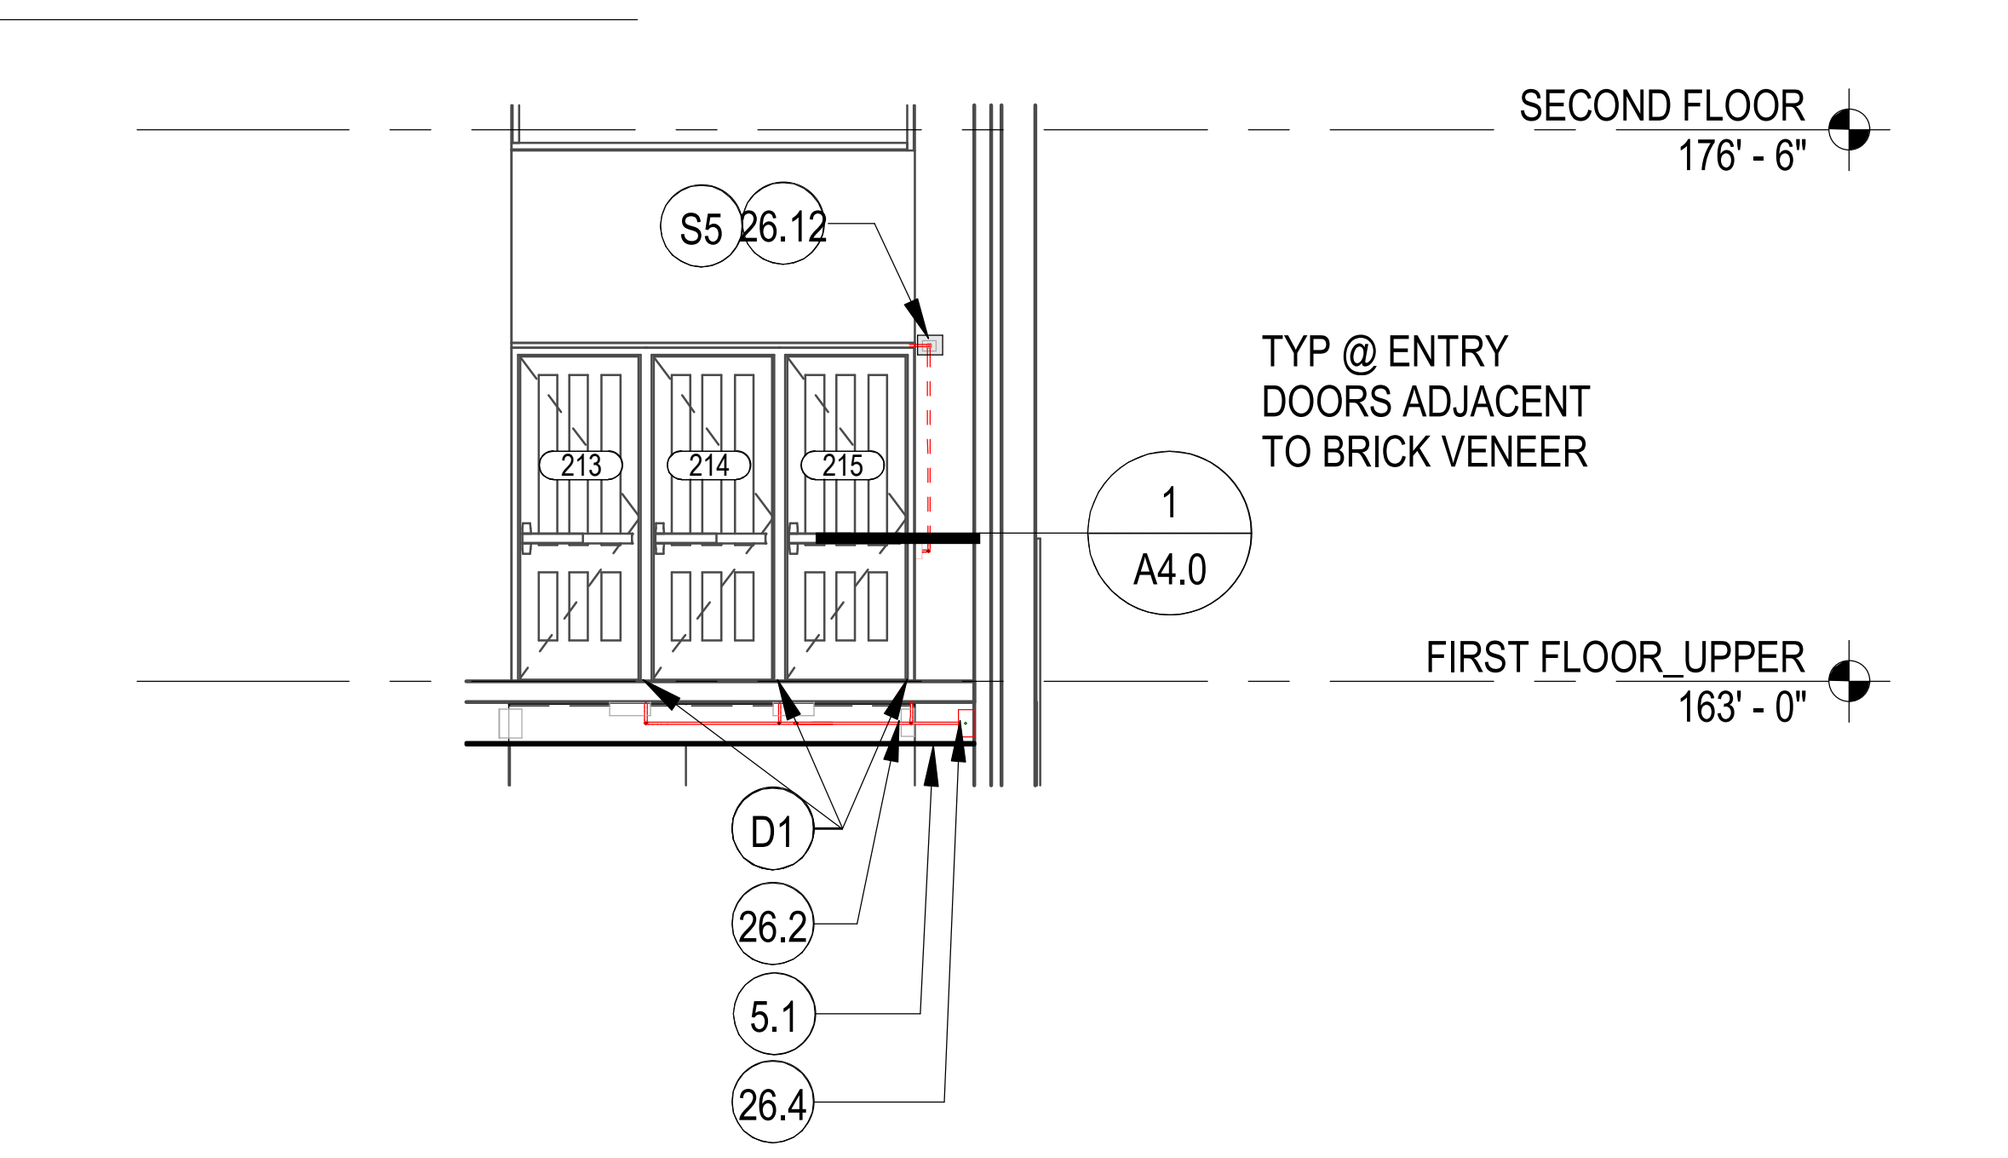

10 GROUP B- TRANSVERSE SECTION @ UPPER FLOOR

SCALE: 1/8" = 1'-0"

KEYNOTES

KEY	NOTE
3.1	CONCRETE PATCH TO MATCH (E)
5.1	CUSTOM PERFORATED METAL MESH CEILING W/ PNT FINISH, SUSPEND FROM (E) CONC STRUCTURE W/ UNISTRUT @ 24" OC, PROVIDE ACCESS HATCH AT EA OF (E) ELEC PANEL LOCATIONS
5.2	C12x20.7 CHANNEL W/ PAINTED FINISH
26.1	EMT ELEC CONDUIT, REF ELEC
26.2	WIRING; ROUTE WITHIN EMT IF EXPOSED/SURFACE MOUNTED; USE FLEXIBLE METAL CONDUIT TO ROUTE CONDUIT WITHIN (E) 1 1/2" BRICK VENEER CAVITY (SALVAGE & REINSTALL (E) BRICK AS REQUIRED); USE OPEN CABLING WITH CEILING MOUNTED J-HOOKS @ 48" OC FOR LOW-VOLTAGE WIRING ABOVE CEILING. REF ELEC
26.4	8"x8" ELEC BOX, REF ELEC
26.6	12"x12" ELEC BOX, REF ELEC
26.9	ROUTE LOW-VOLTAGE WIRING THROUGH (E) WD FRAMING AT DOOR HEAD & JAMB TO ELECTRIFIED HINGES; SALVAGE & REINSTALL (E) HARDWOOD TRIM AS REQUIRED TO MAINTAIN FINISH APPEARANCE
26.11	REINSTALL SALVAGED ADA PUSH PAD
26.12	PIEZO SOUNDER W/IN RECESSED BOX. ROUTE LOW-VOTAGE WIRING AND FLEXIBLE METAL CONDUIT TO CONTROL BOX, REF ELEC
26.14	ACCESS CONTROL PANEL, REF ELEC
26.15	EMERGENCY CLASS LOCKDOWN BUTTON, SALVAGE & REINSTALL (E) FINISHES AS REQ TO INSTALL RECESSED BOX AND RECESS LOW-VOLTAGE WIRING, REF ELEC
26.20	CAAMS PANEL, REF ELEC
26.24	PIEZO SOUNDER W/ IN RECESSED BOX (ON SECURE SIDE). EMBED W/IN (E) WD TRIM, ROUTE-OUT (E) WD FRAMING AS REQ TO ROUTE LOW-VOLTAGE WIRING TO CONTROL BOX
28.1	CARD READER W/ RECESSED ELEC BOX, REF ELEC
D1	DRILL THROUGH (E) ELEVATE CONCRETE SLAB INTO BASE OF (E) WD DOOR JAMB
D2	DRILL THROUGH (E) CONC WALL (ASSUME 8" THICK) FOR CONDUIT INSTALLATION. PATCH OPENING ONCE CONDUIT IS INSTALLED
D12	SAWCUT & CHIP OUT (E) CONCRETE WALL AS REQ TO INSTALL CONCEALED CONDUIT/WIRING TO THE CARDREADER
E1	EXISTING ADA PUSH BUTTON
E2	EXISTING CONCRETE HEADER
S1	SALVAGE & REINSTALL (E) ADA OPERATOR
S5	SALVAGE & REINTALL (E) BRICK AS REQ TO INSTALL CONCEALED CONDUIT/WIRING WITHIN (E) BRICK VENEER CAVITY

SHEET NOTES

1. REF ELEC FOR ADDITIONAL EQUIPMENT
2. CONDUITS SHALL BE CONCEALED IN WALLS, CHASES, ABOVE SUSPENDED CEILINGS, BELOW FLOORS OR BE FURRED-IN IN ROOMS WITH EXISTING CEILINGS, UNLESS OTHERWISE NOTED.
3. REF SPEC FOR FIRESTOPPING REQUIREMENTS AT WALL PENETRATIONS
4. REFER TO PLANS FOR ADDITIONAL WORK NOT INDICATED IN ELEVATION/SECTION.
5. REFER TO SECTION 00 31 00 (AVAILABLE INFORMATION) FOR ADDITIONAL EXISTING CONDITION INFORMATION

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL
CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL



KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

BUILDING SECTIONS

SHEET No.

A3.0

4/14/2026 10:14:30 AM

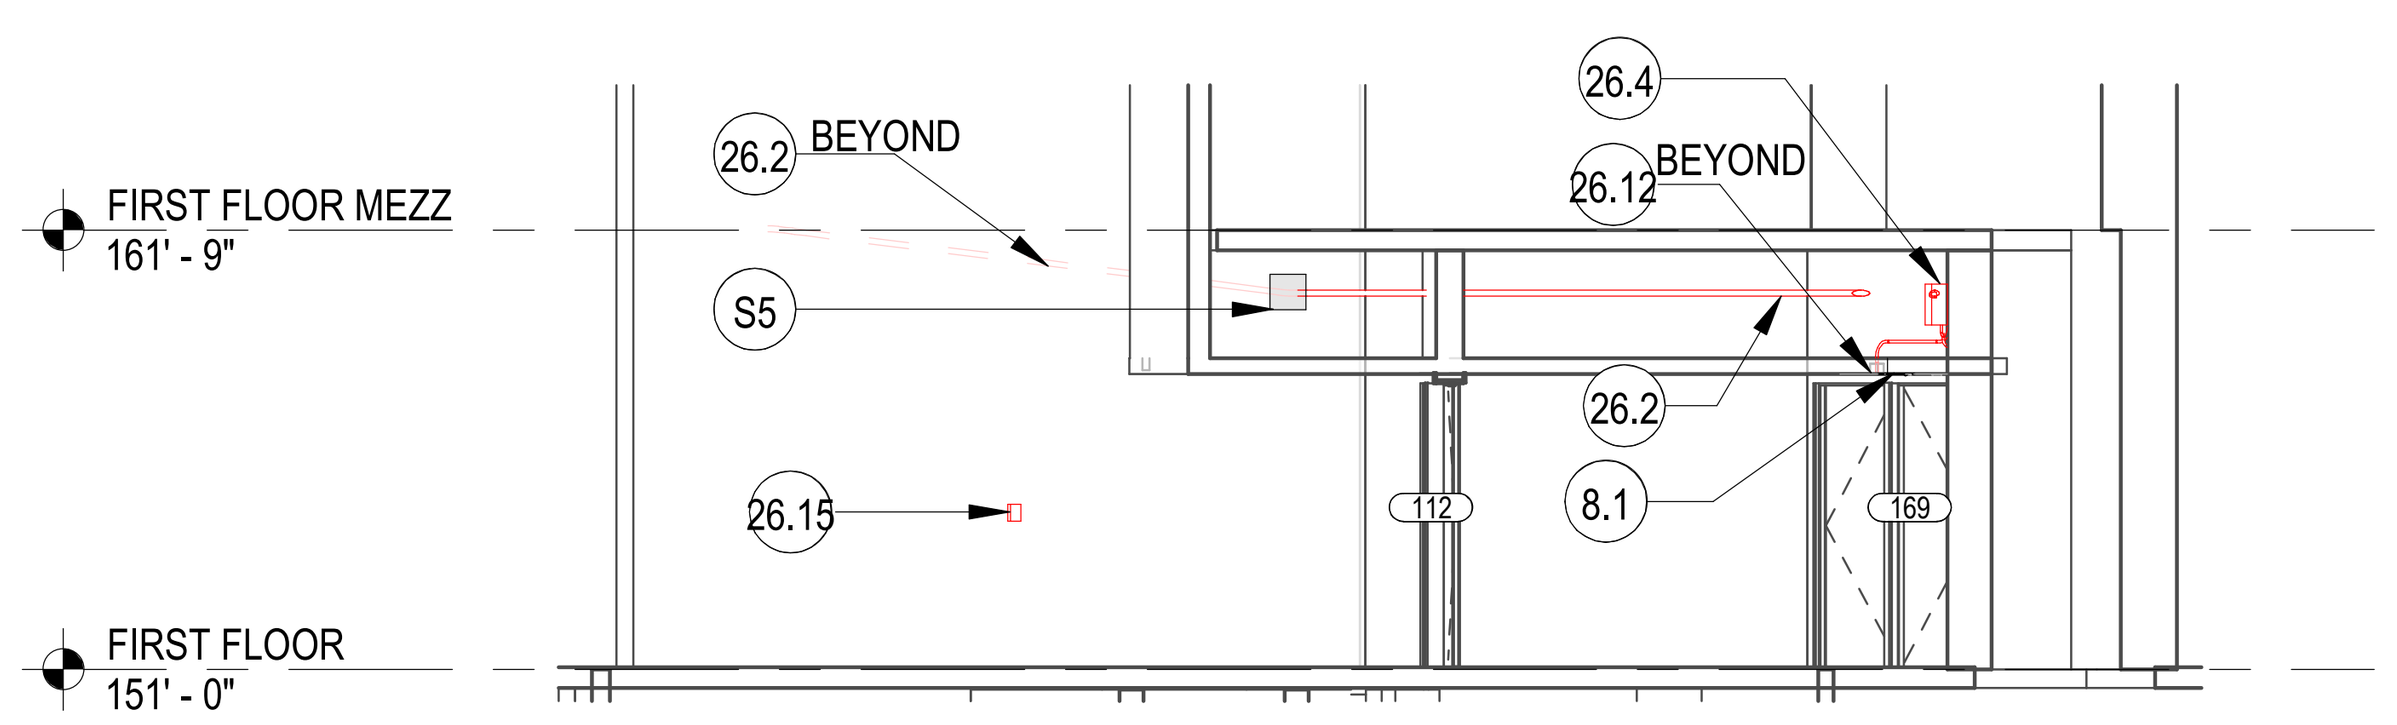

1 GROUP B TO GROUP C CONDUIT ROUTE
SCALE: 1/8" = 1'-0"

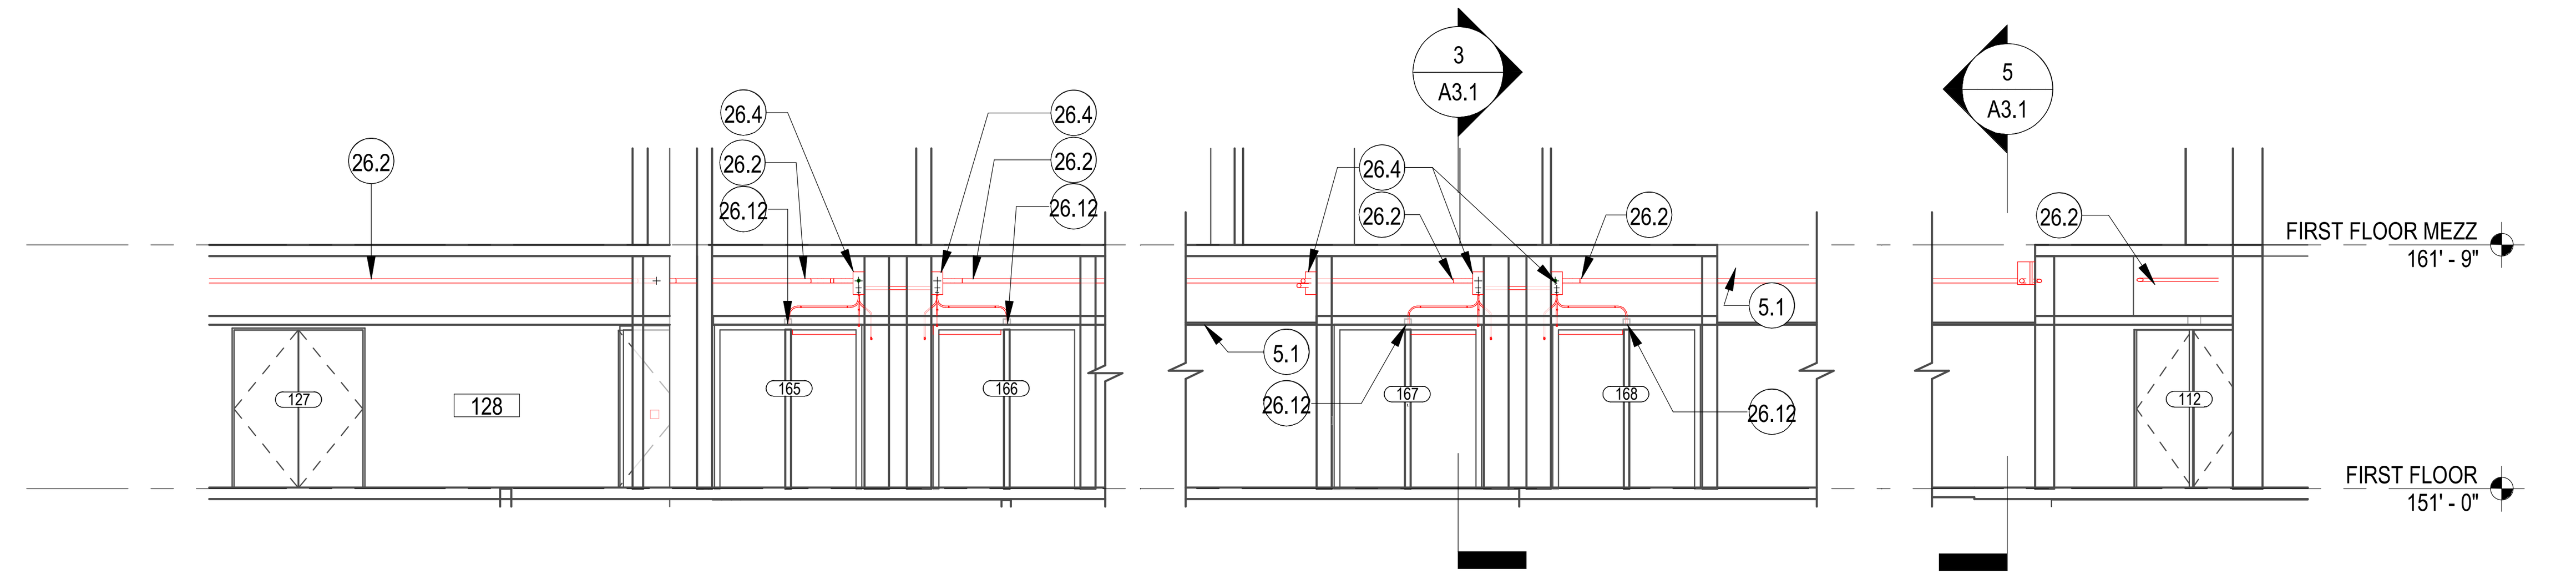

2 GROUP C- CEILING PENETRATION AT ROOM 100L
SCALE: 1/8" = 1'-0"

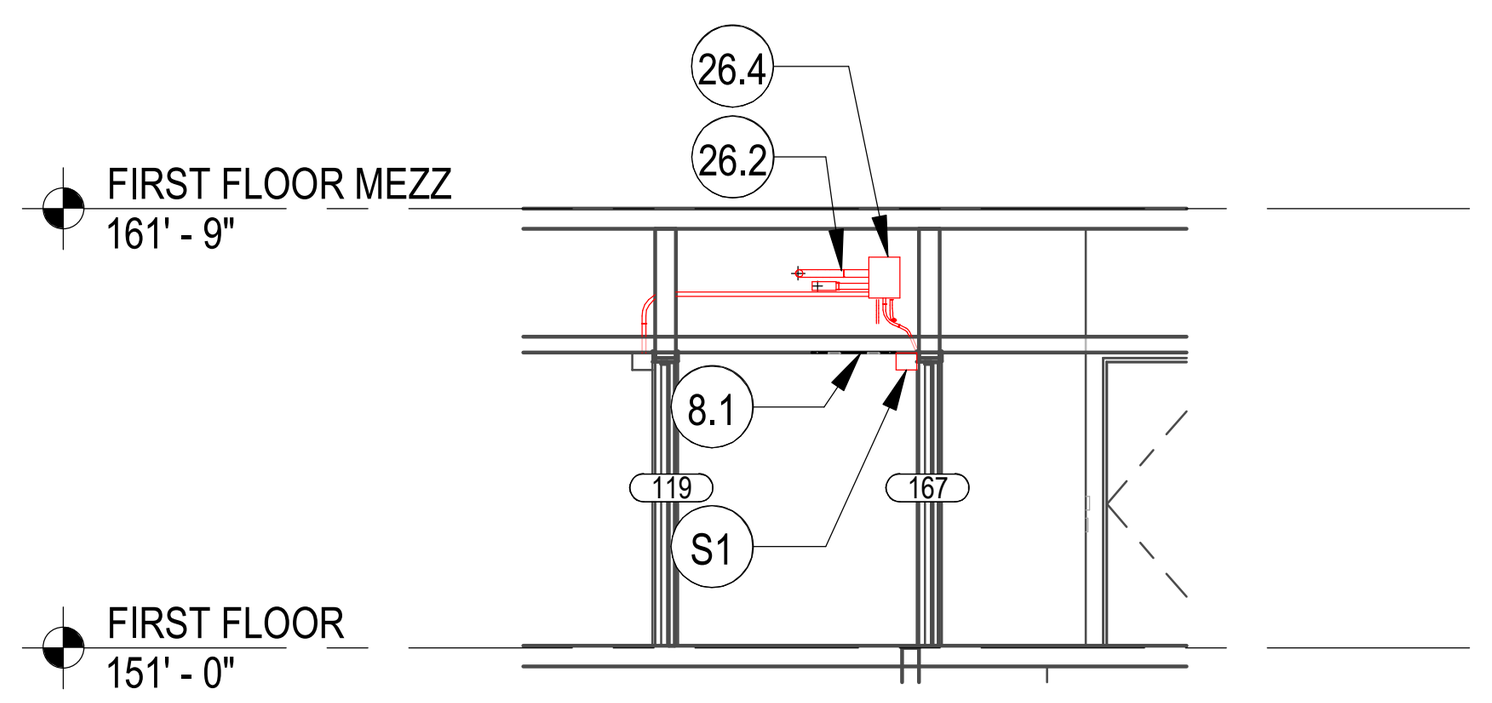

3 GROUP C_TYPICAL SECTION
SCALE: 1/8" = 1'-0"

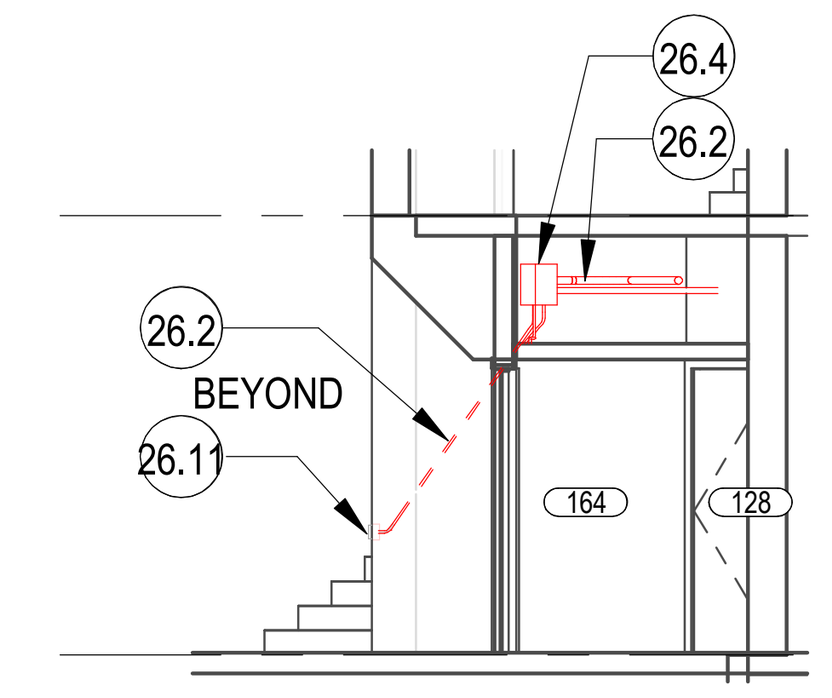

4 GROUP C_ WEST AUDITORIUM SIDE
SCALE: 1/8" = 1'-0"

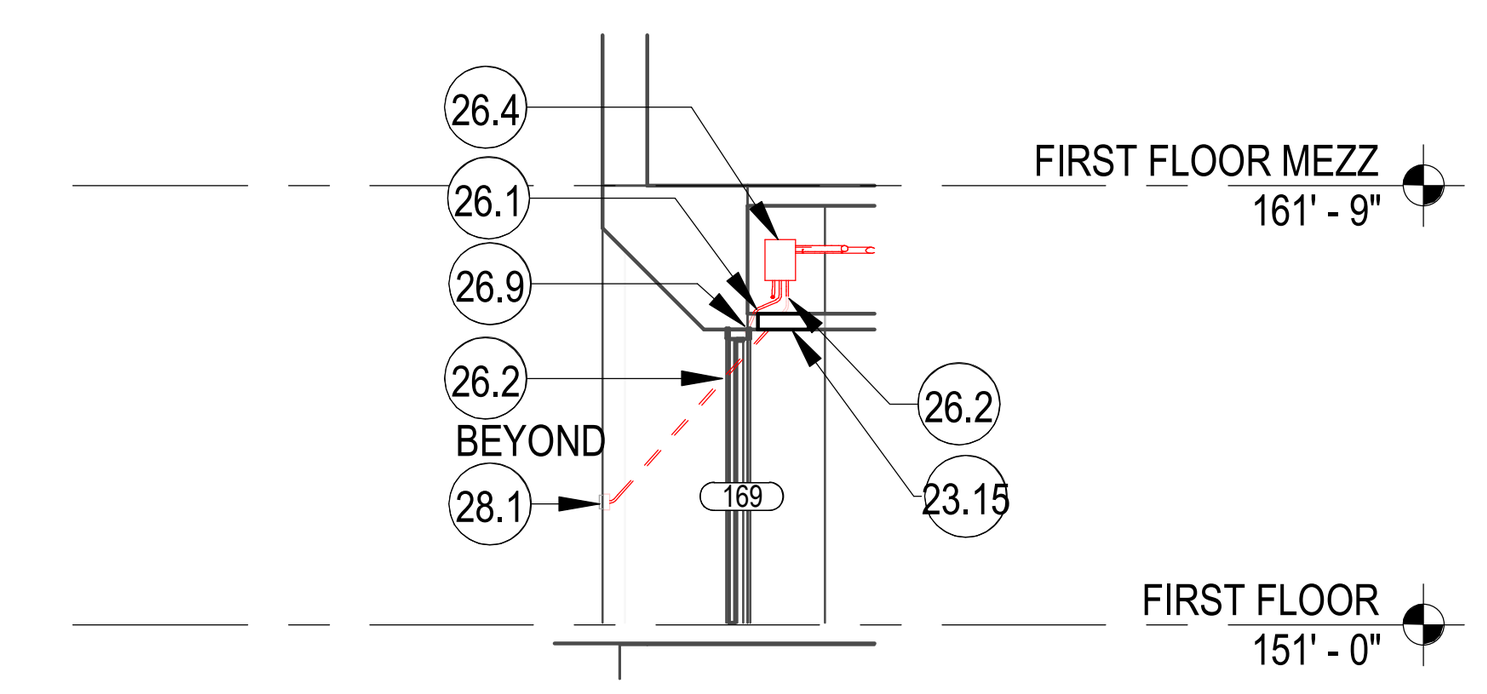

5 GROUP C_EAST AUDITORIUM SIDE
SCALE: 1/8" = 1'-0"

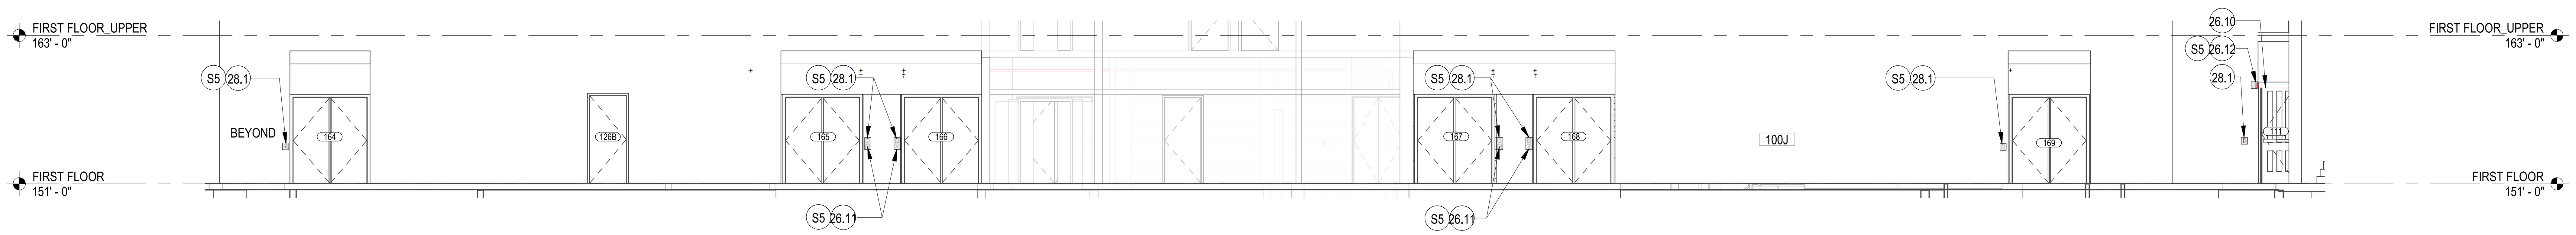

6 GROUP C_LONGITUDINL SECTION @ CORRIDOR
SCALE: 1/8" = 1'-0"

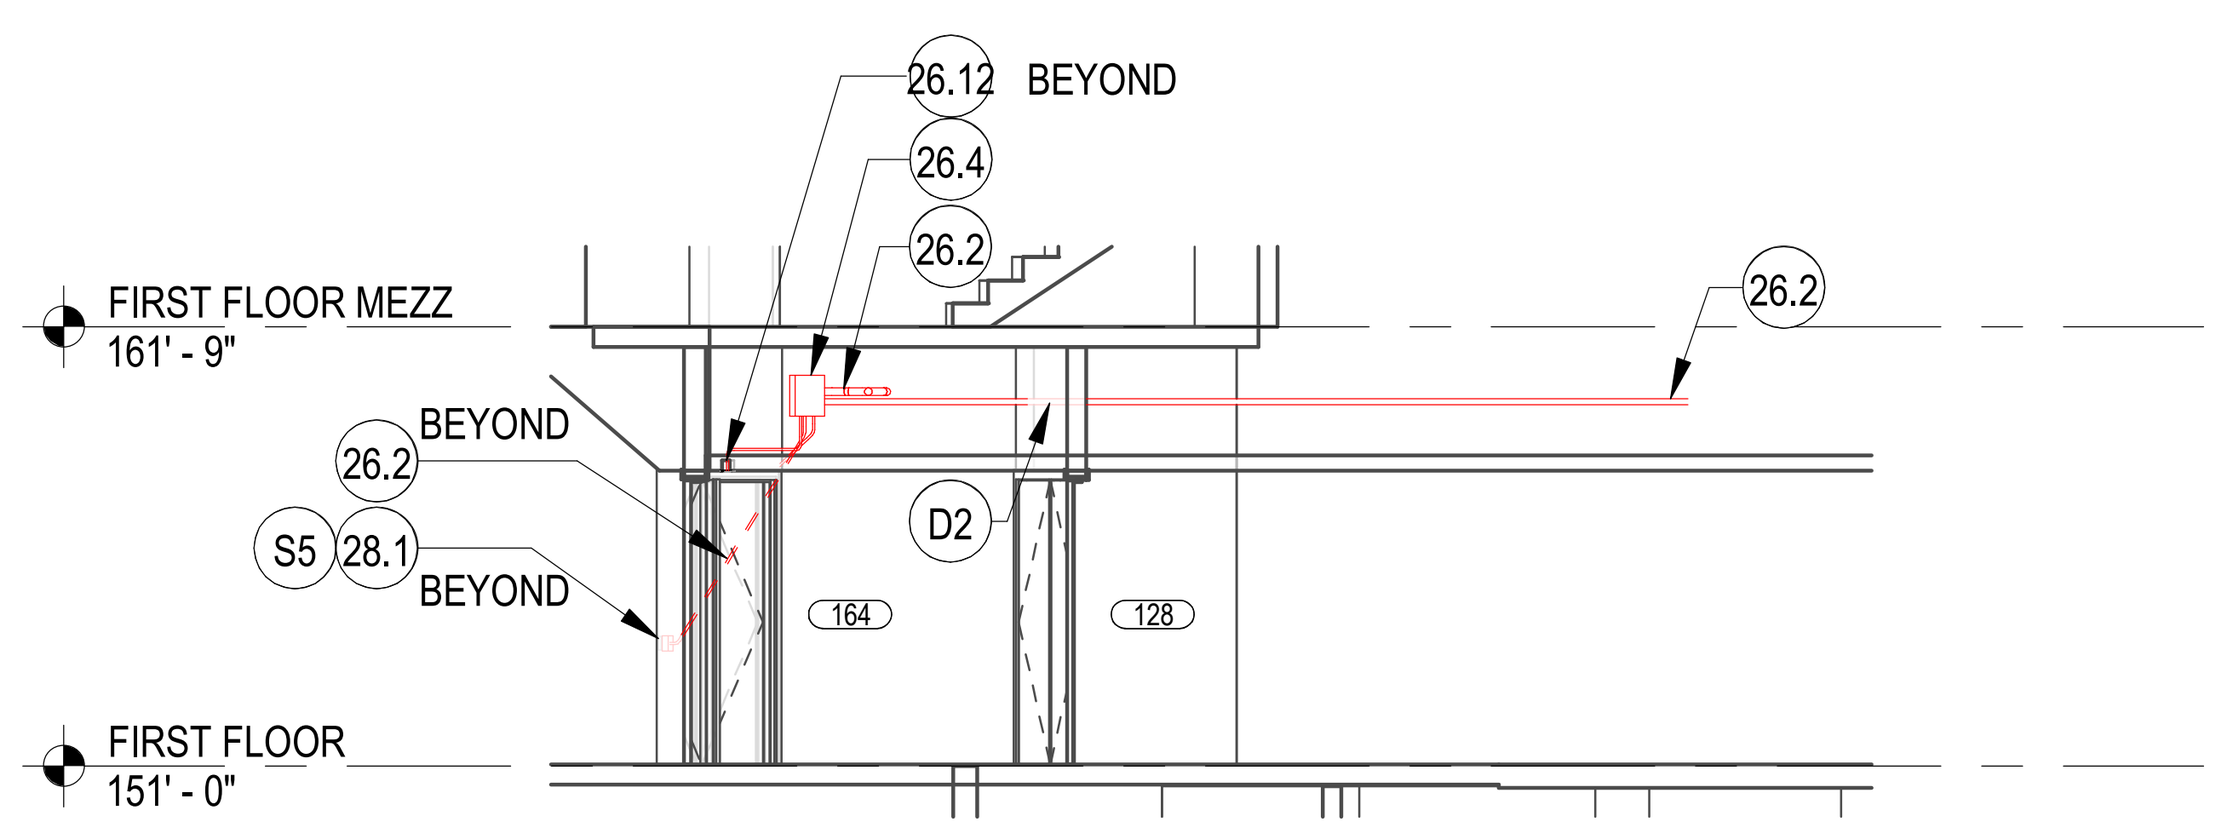

7 GROUP C TO GROUP D_CONDUIT ROUTE
SCALE: 1/8" = 1'-0"

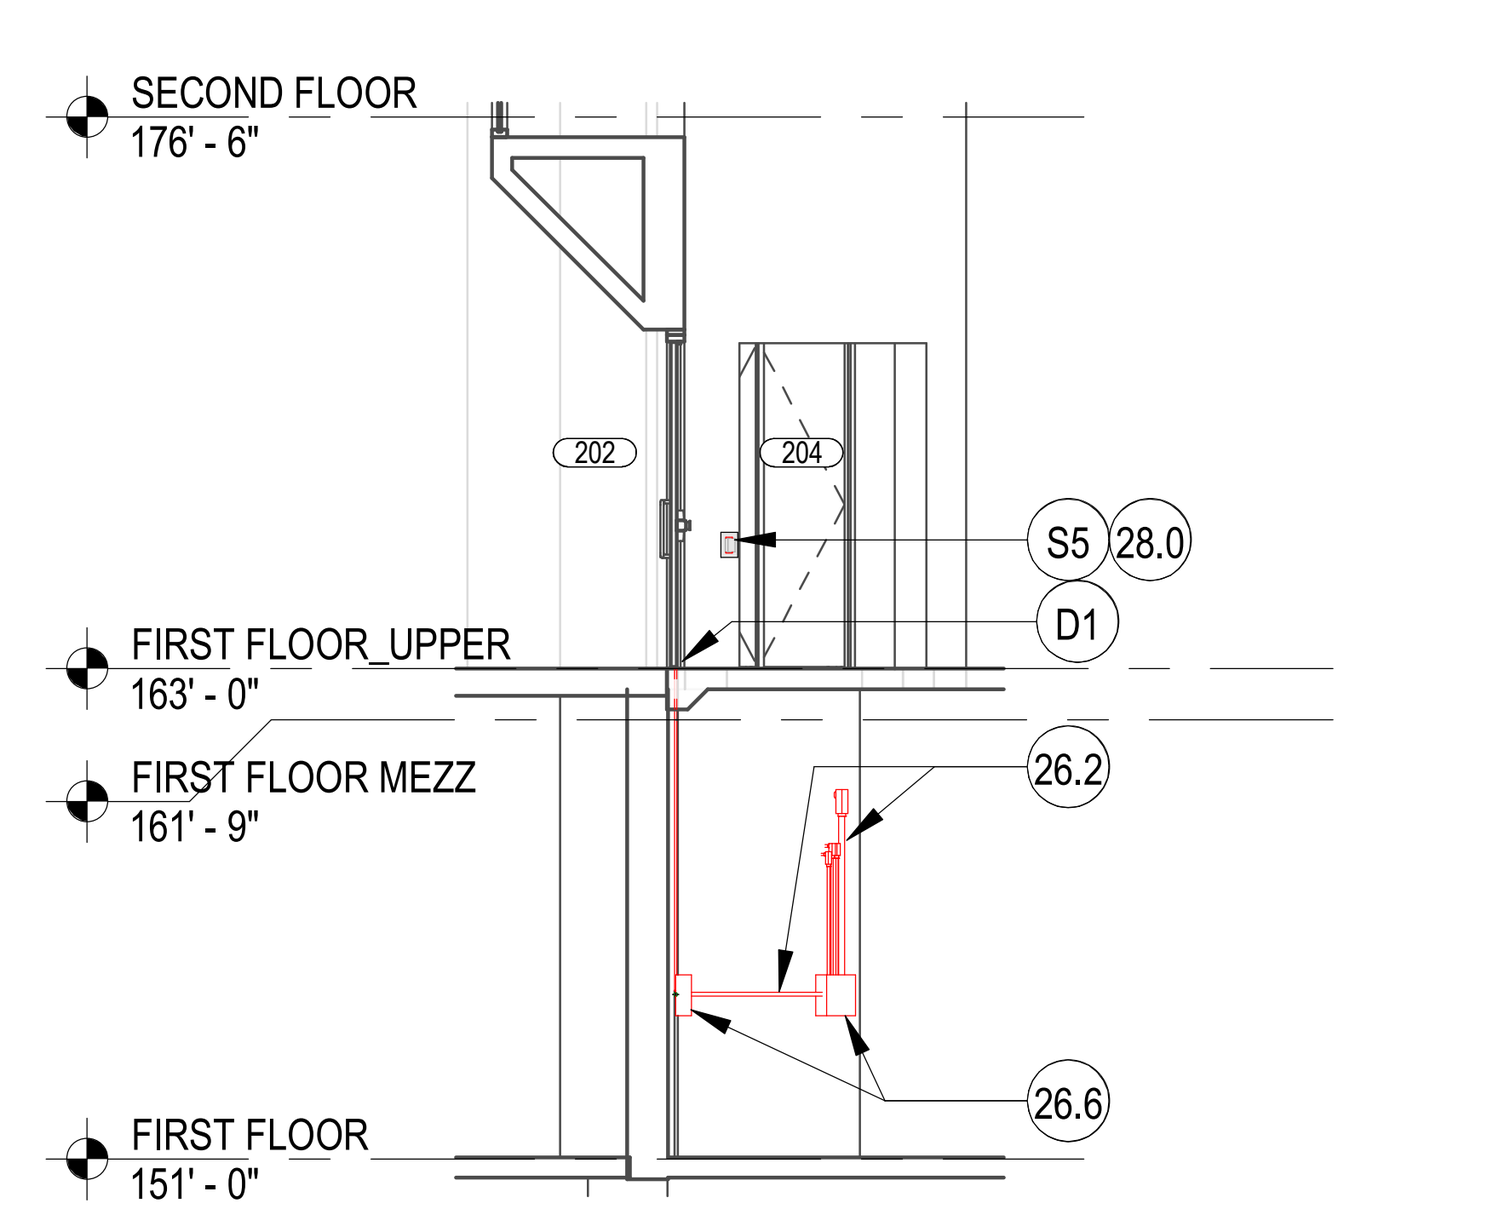

8 GROUP D- TRANSVERSE SECTION
SCALE: 1/8" = 1'-0"

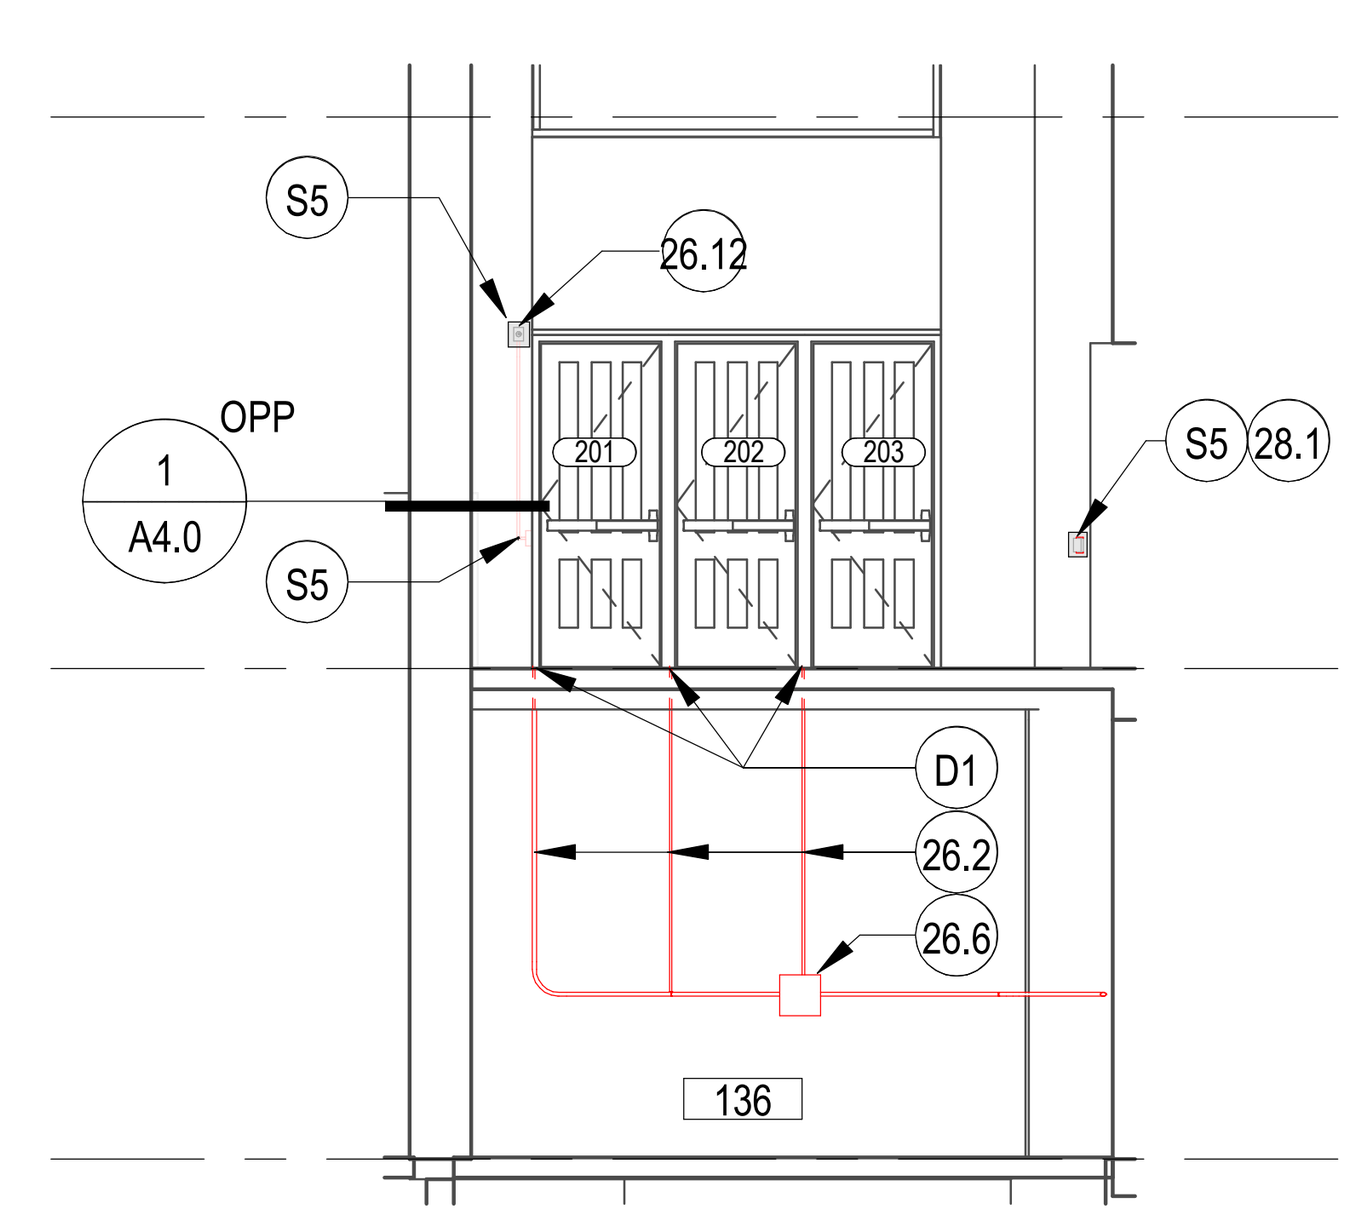

9 GROUP D @ UPPER LEVEL
SCALE: 1/8" = 1'-0"

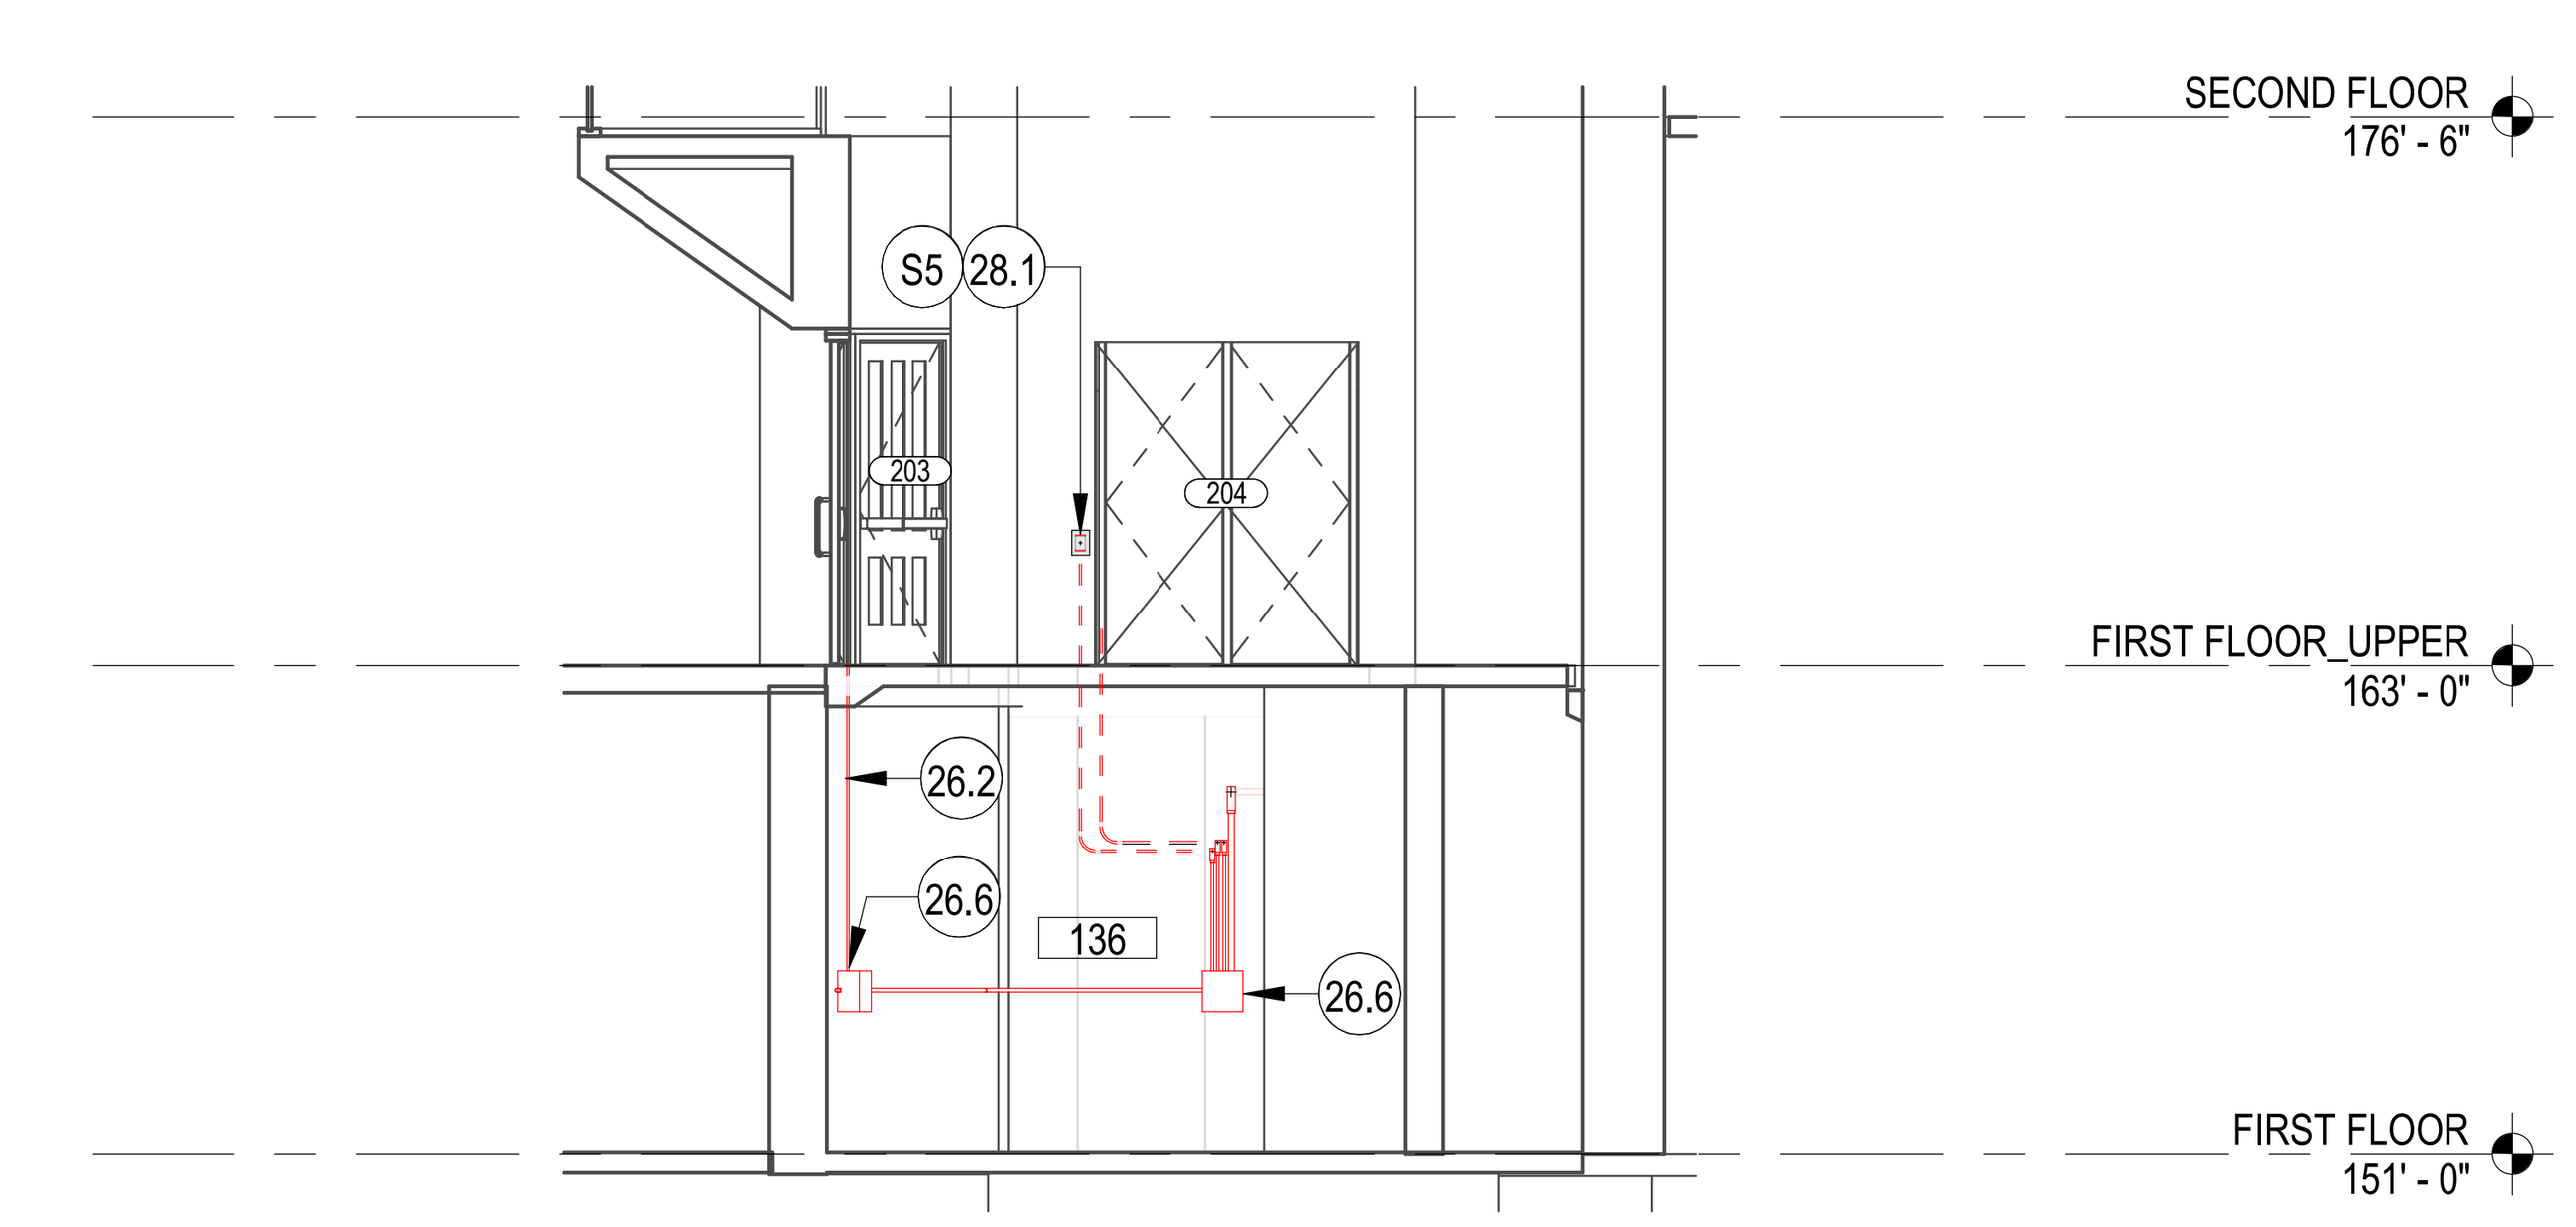

10 GROUP D_ TYPICAL SECTION
SCALE: 1/8" = 1'-0"

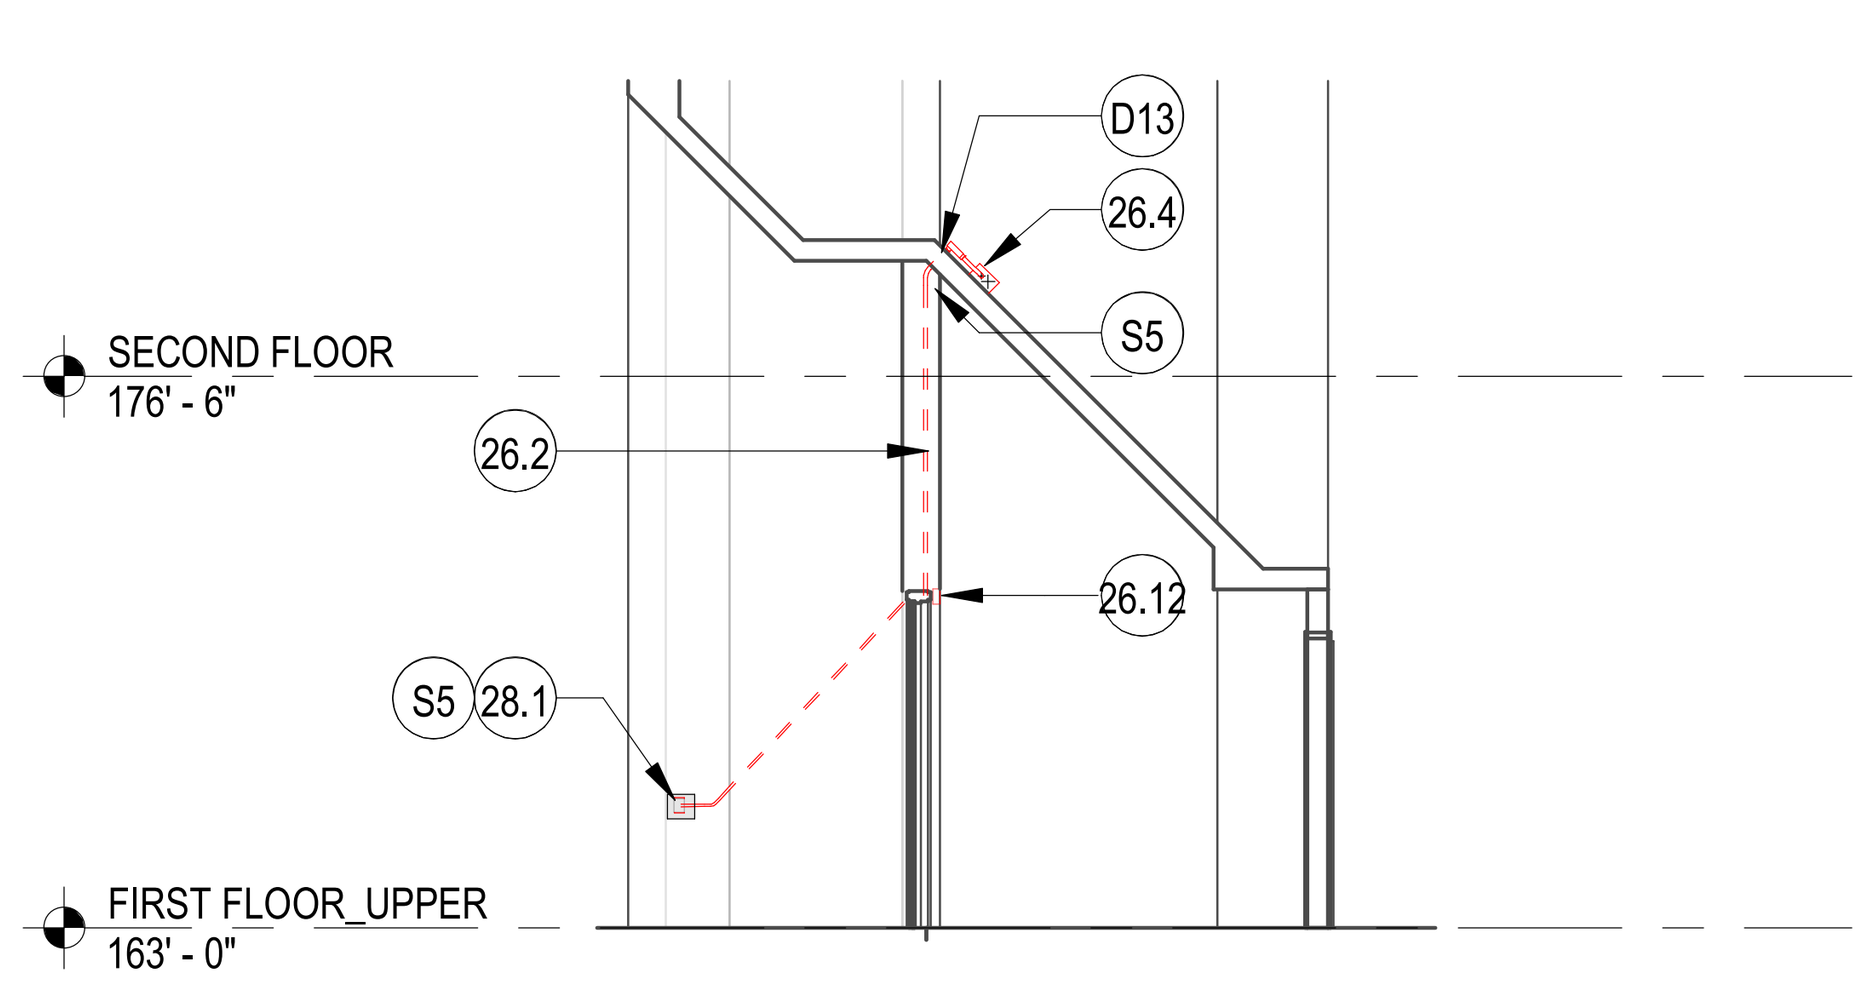

11 GROUP E_CONDUIT ROUTE THROUGH PIER
SCALE: 1/8" = 1'-0"

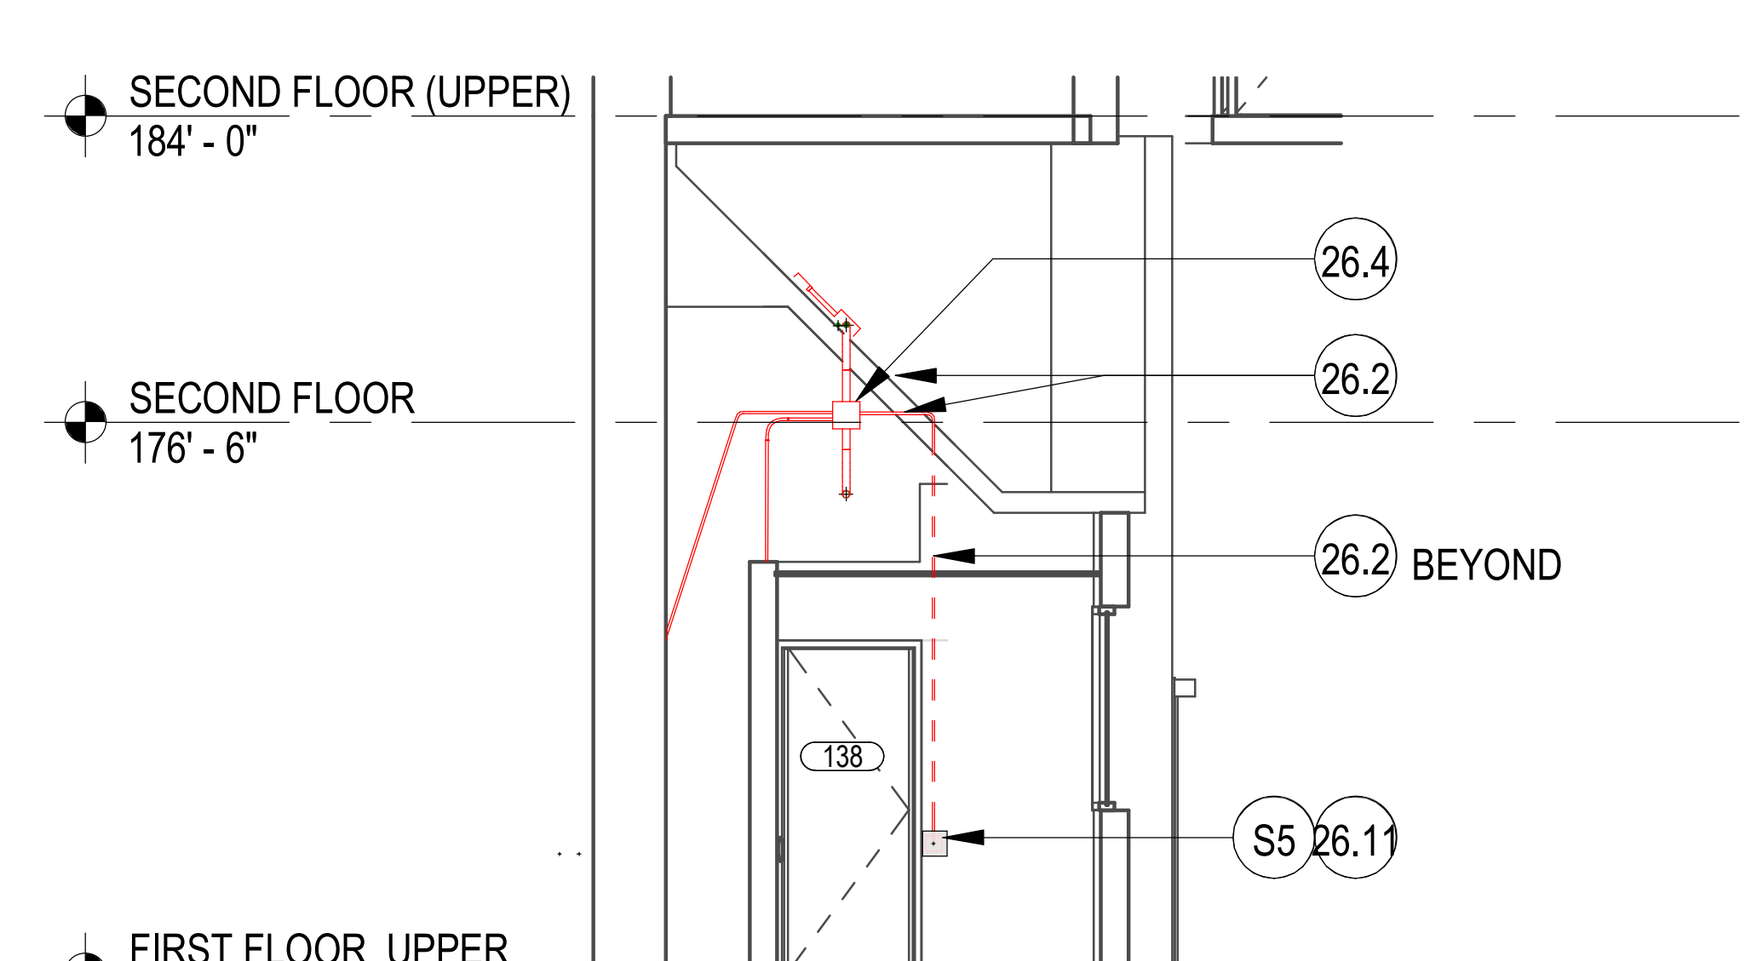

12 GROUP F_ TRANSVERSE SECTION
SCALE: 1/8" = 1'-0"

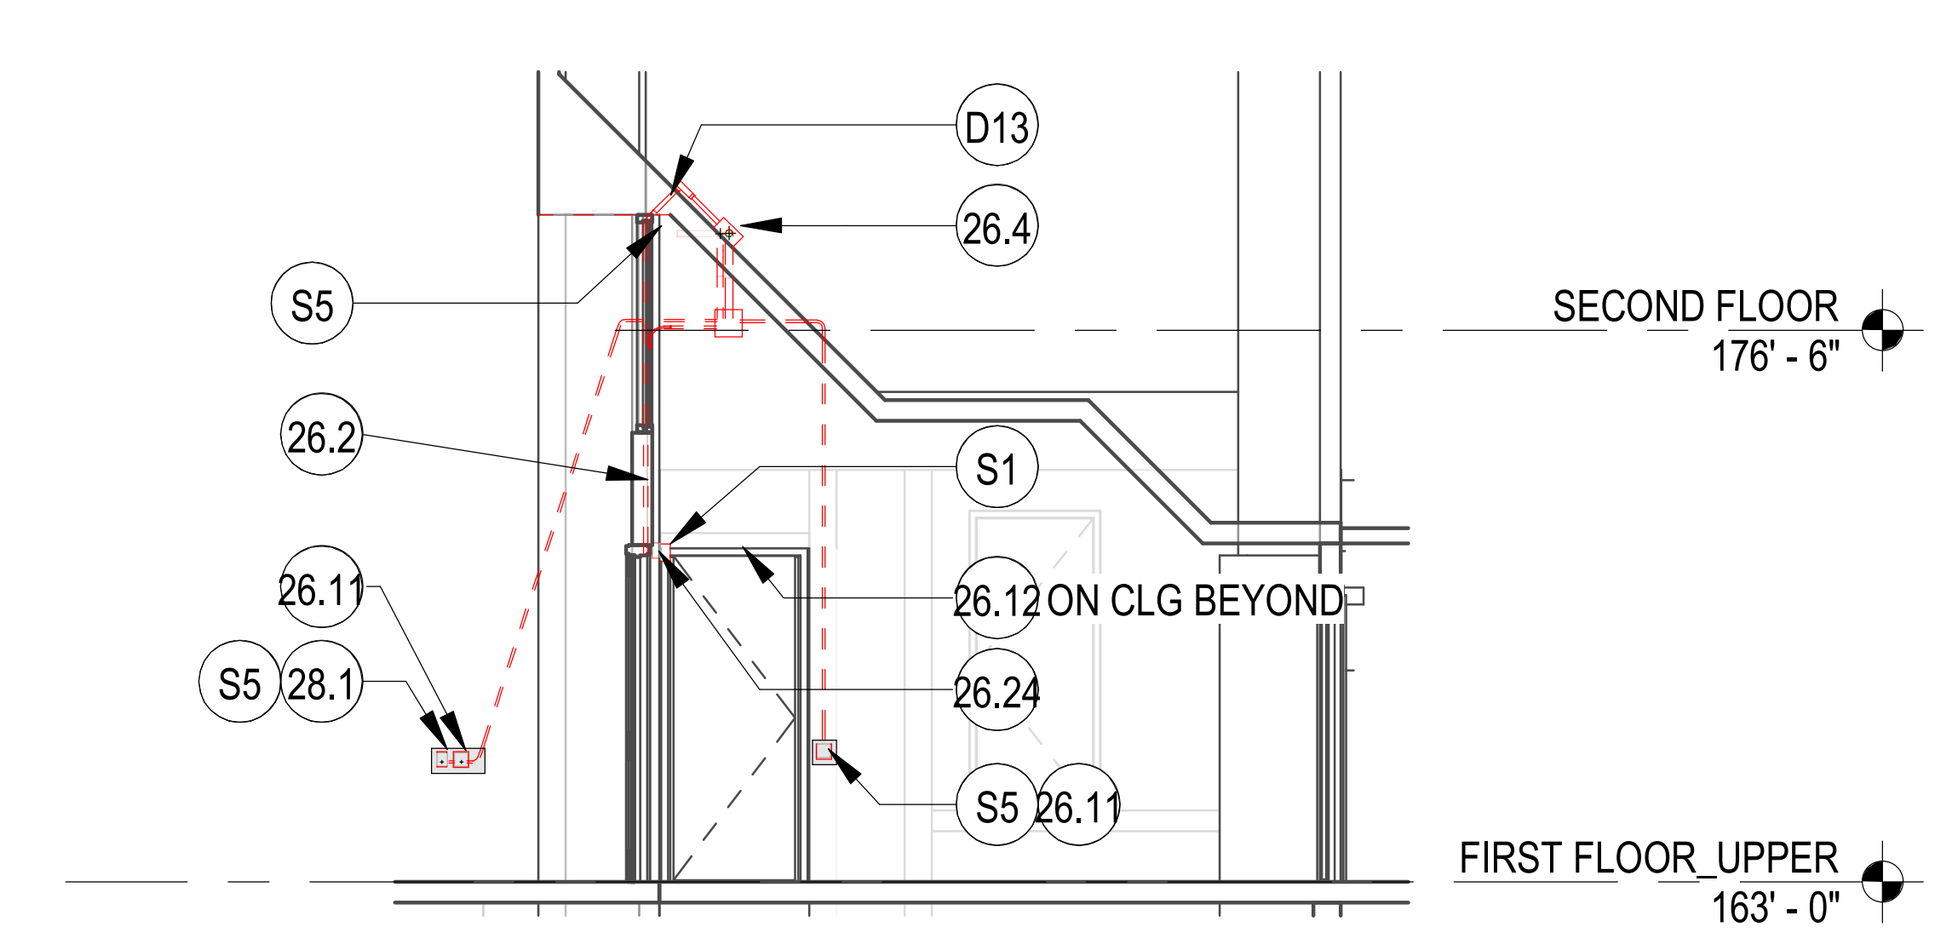

13 GROUP F_CONDUIT ROUTE THROUGH PIER
SCALE: 1/8" = 1'-0"
NOTE: GROUP G SIMILAR

KEYNOTES

KEY	NOTE
5.1	CUSTOM PERFORATED METAL MESH CEILING W/ PNT FINISH, SUSPEND FROM (E) CONC STRUCTURE W/ UNISTRUT @ 24" OC, PROVIDE ACCESS HATCH AT EA OF (E) ELEC PANEL LOCATIONS
8.1	18" x 18" ACCESS HATCH W/IN (E) GWB CEILING
23.15	
26.1	EMT ELEC CONDUIT, REF ELEC
26.2	WIRING; ROUTE WITHIN EMT IF EXPOSED/SURFACE MOUNTED; USE FLEXIBLE METAL CONDUIT TO ROUTE CONDUIT WITHIN (E) 1 1/2" BRICK VENEER CAVITY (SALVAGE & REINSTALL (E) BRICK AS REQUIRED); USE OPEN CABLING WITH CEILING MOUNTED J-HOOKS @ 48" OC FOR LOW-VOLTAGE WIRING ABOVE CEILING. REF ELEC
26.4	8"x8" ELEC BOX, REF ELEC
26.6	12"x12" ELEC BOX, REF ELEC
26.9	ROUTE LOW-VOLTAGE WIRING THROUGH (E) WD FRAMING AT DOOR HEAD & JAMB TO ELECTRIFIED HINGES; SALVAGE & REINSTALL (E) HARDWOOD TRIM AS REQUIRED TO MAINTAIN FINISH APPEARANCE
26.10	REINSTALL SALVAGED ADA OPERATOR
26.11	REINSTALL SALVAGED ADA PUSH PAD
26.12	PIEZO SOUNDER W/IN RECESSED BOX. ROUTE LOW-VOTAGE WIRING AND FLEXIBLE METAL CONDUIT TO CONTROL BOX, REF ELEC
26.15	EMERGENCY CLASS LOCKDOWN BUTTON, SALVAGE & REINSTALL (E) FINISHES AS REQ TO INSTALL RECESSED BOX AND RECESS LOW-VOLTAGE WIRING, REF ELEC
26.24	PIEZO SOUNDER W/ IN RECESSED BOX (ON SECURE SIDE). EMBED W/IN (E) WD TRIM, ROUTE-OUT (E) WD FRAMING AS REQ TO ROUTE LOW-VOLTAGE WIRING TO CONTROL BOX
28.0	ELECTRONIC SAFETY AND SECURITY - ELEMENT KEYNOTES
28.1	CARD READER W/ RECESSED ELEC BOX, REF ELEC
D1	DRILL THROUGH (E) ELEVATE CONCRETE SLAB INTO BASE OF (E) WD DOOR JAMB
D2	DRILL THROUGH (E) CONC WALL (ASSUME 8" THICK) FOR CONDUIT INSTALLATION. PATCH OPENING ONCE CONDUIT IS INSTALLED
D13	DRILL THROUGH (E) ELEVATED CONCRETE SLAB INTO BRICK VENEER CAVITY
S1	SALVAGE & REINSTALL (E) ADA OPERATOR
S5	SALVAGE & REINTALL (E) BRICK AS REQ TO INSTALL CONCEALED CONDUIT/WIRING WITHIN (E) BRICK VENEER CAVITY

SHEET NOTES

1. REF ELEC FOR ADDITIONAL EQUIPMENT
2. CONDUITS SHALL BE CONCEALED IN WALLS, CHASES, ABOVE SUSPENDED CEILINGS, BELOW FLOORS OR BE FURRED-IN IN ROOMS WITH EXISTING CEILINGS, UNLESS OTHERWISE NOTED.
3. REF SPEC FOR FIRESTOPPING REQUIREMENTS AT WALL PENETRATIONS
4. REFER TO PLANS FOR ADDITIONAL WORK NOT INDICATED IN ELEVATION/SECTION.
5. REFER TO SECTION 00 31 00 (AVAILABLE INFORMATION) FOR ADDITIONAL EXISTING CONDITION INFORMATION

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL
CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL



KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

BUILDING SECTIONS

SHEET No.

A3.1

4/14/2026 10:14:33 AM

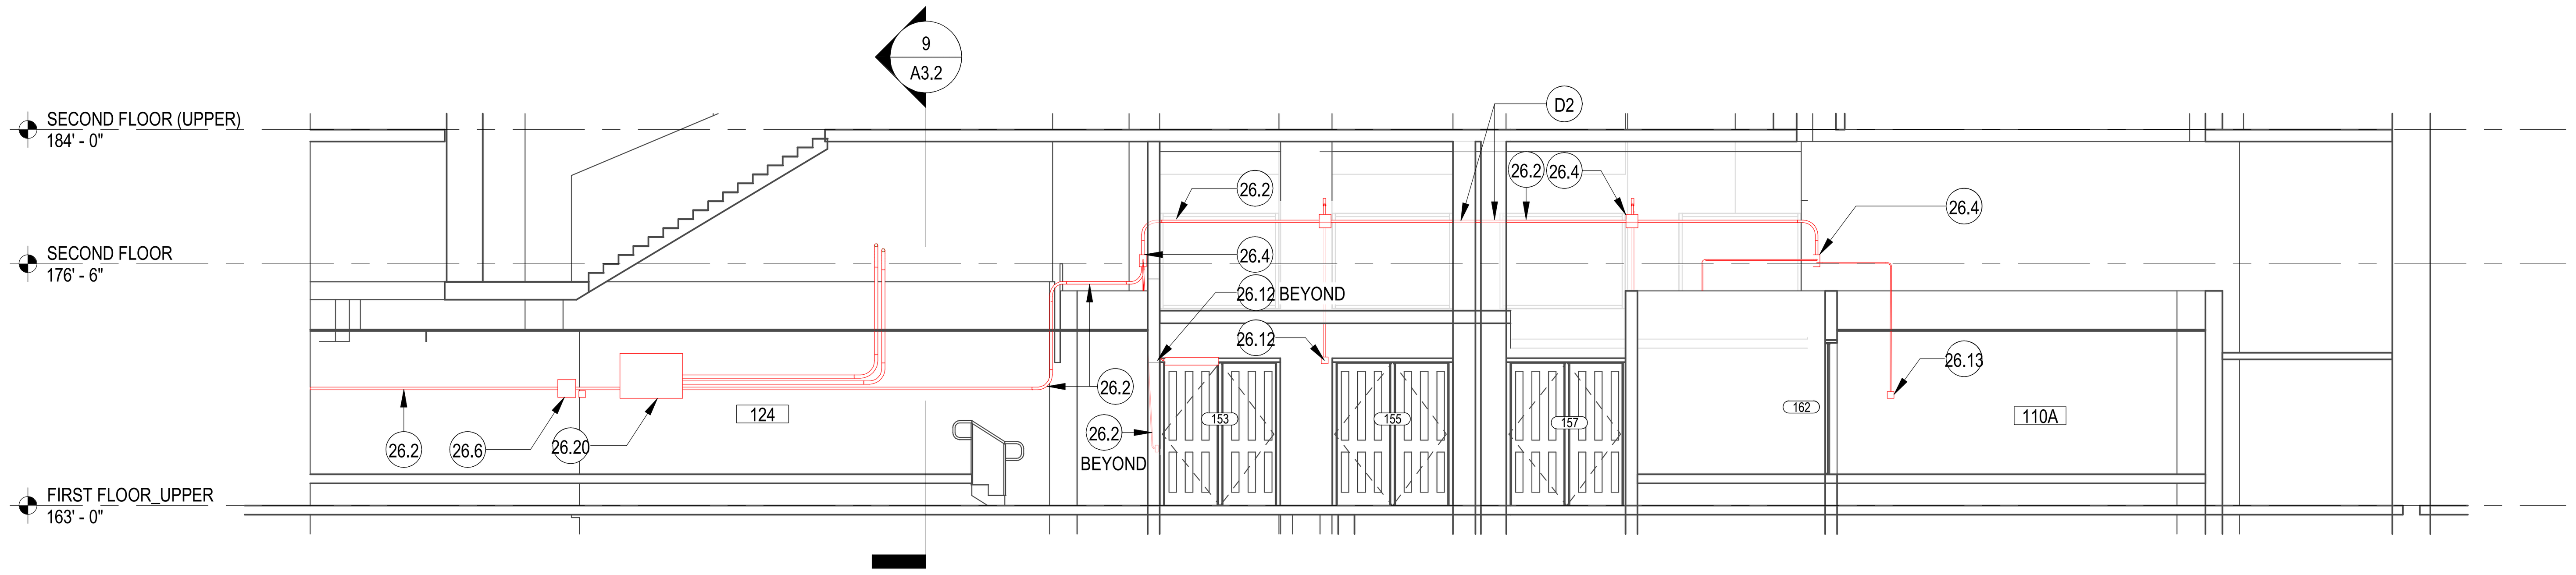

1 GROUP F TO GROUP G_CONDUIT ROUTE

SCALE: 1/8" = 1'-0"

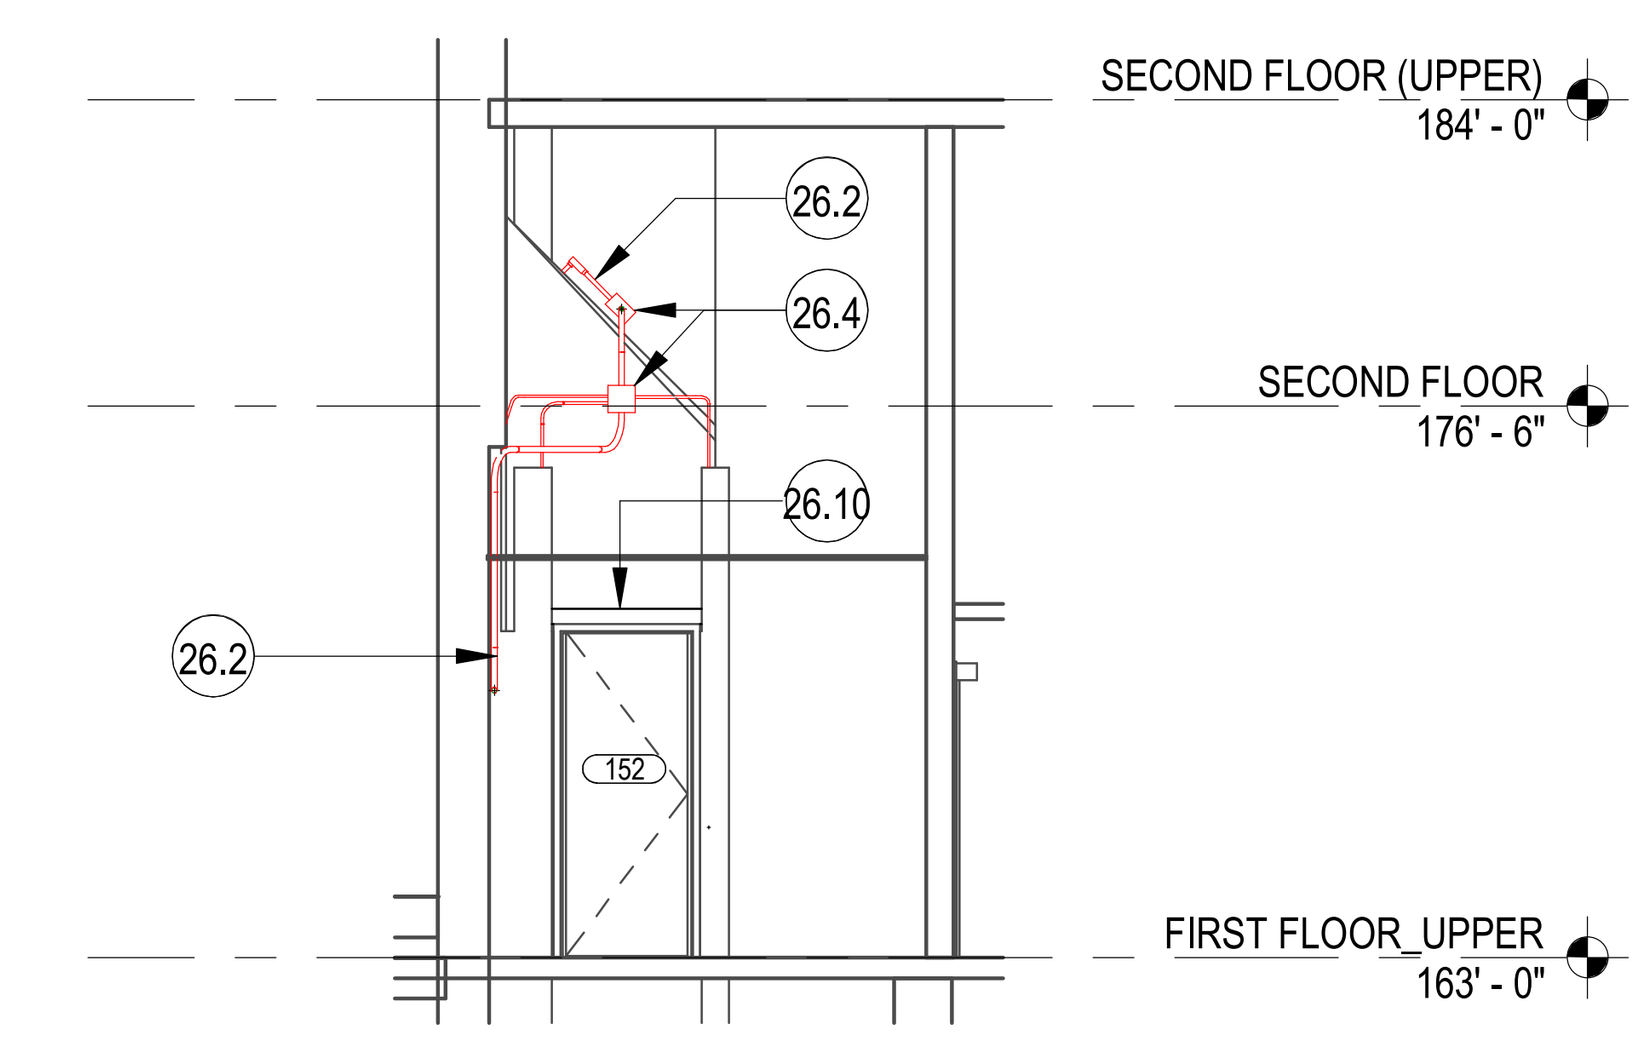

2 GROUP G_TRANSVERSE SECTION

SCALE: 1/8" = 1'-0"

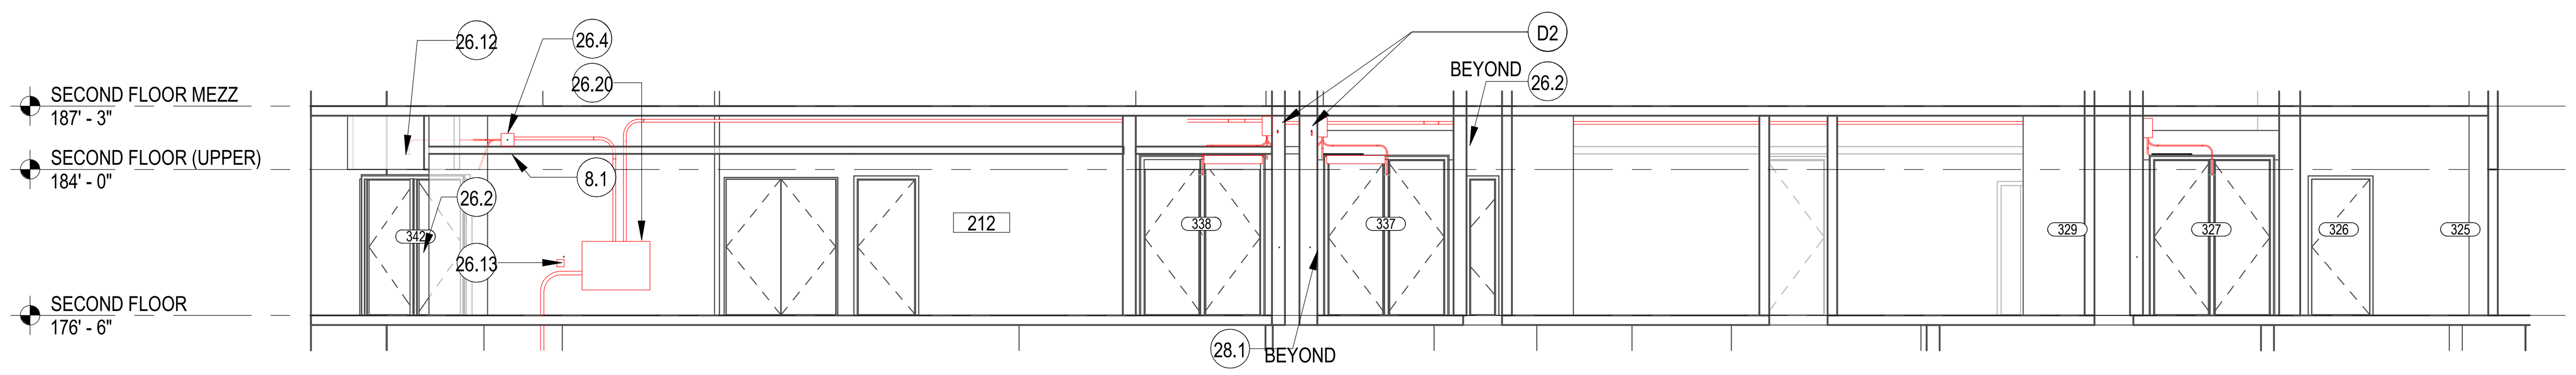

3 GROUP H_CONDUIT ROUTE

SCALE: 1/8" = 1'-0"

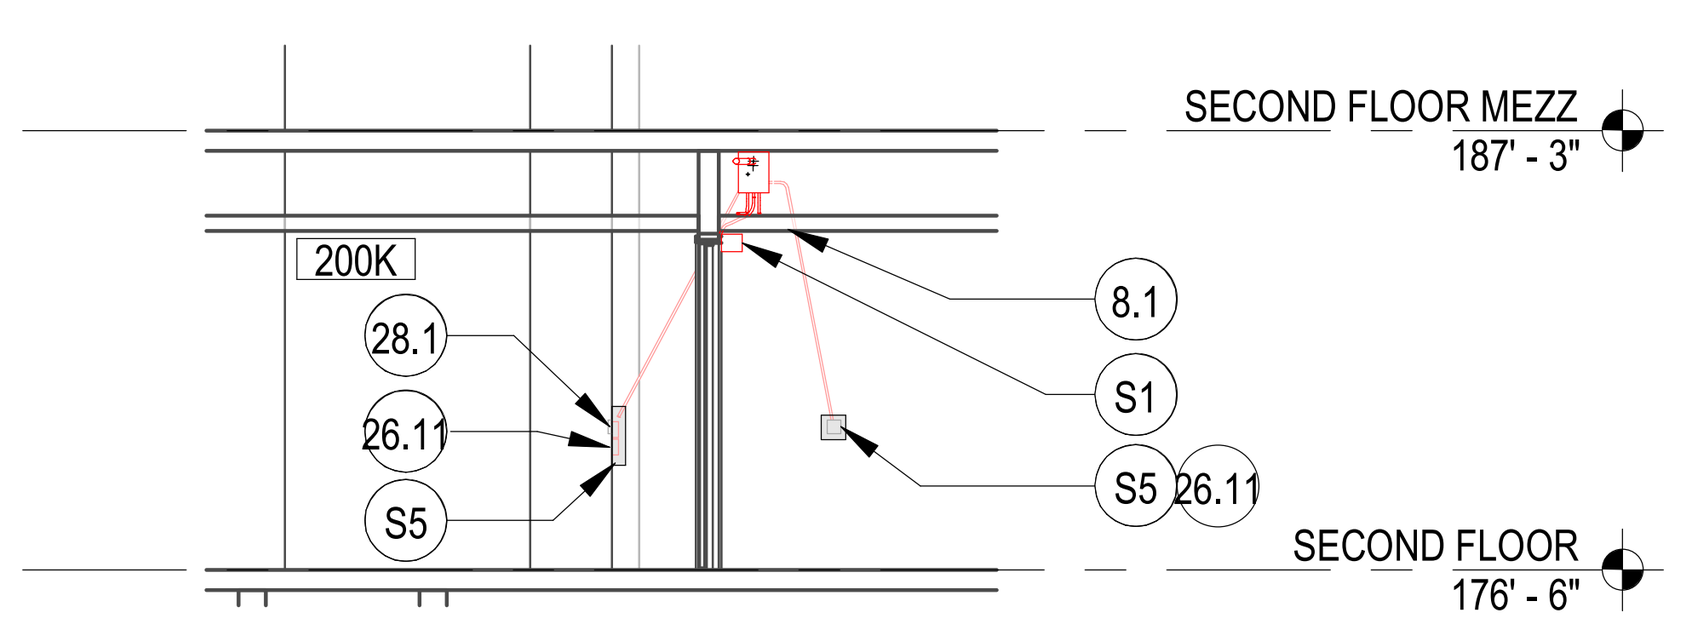

4 GROUP H_ TRANSVERSE SECTION

SCALE: 1/8" = 1'-0"

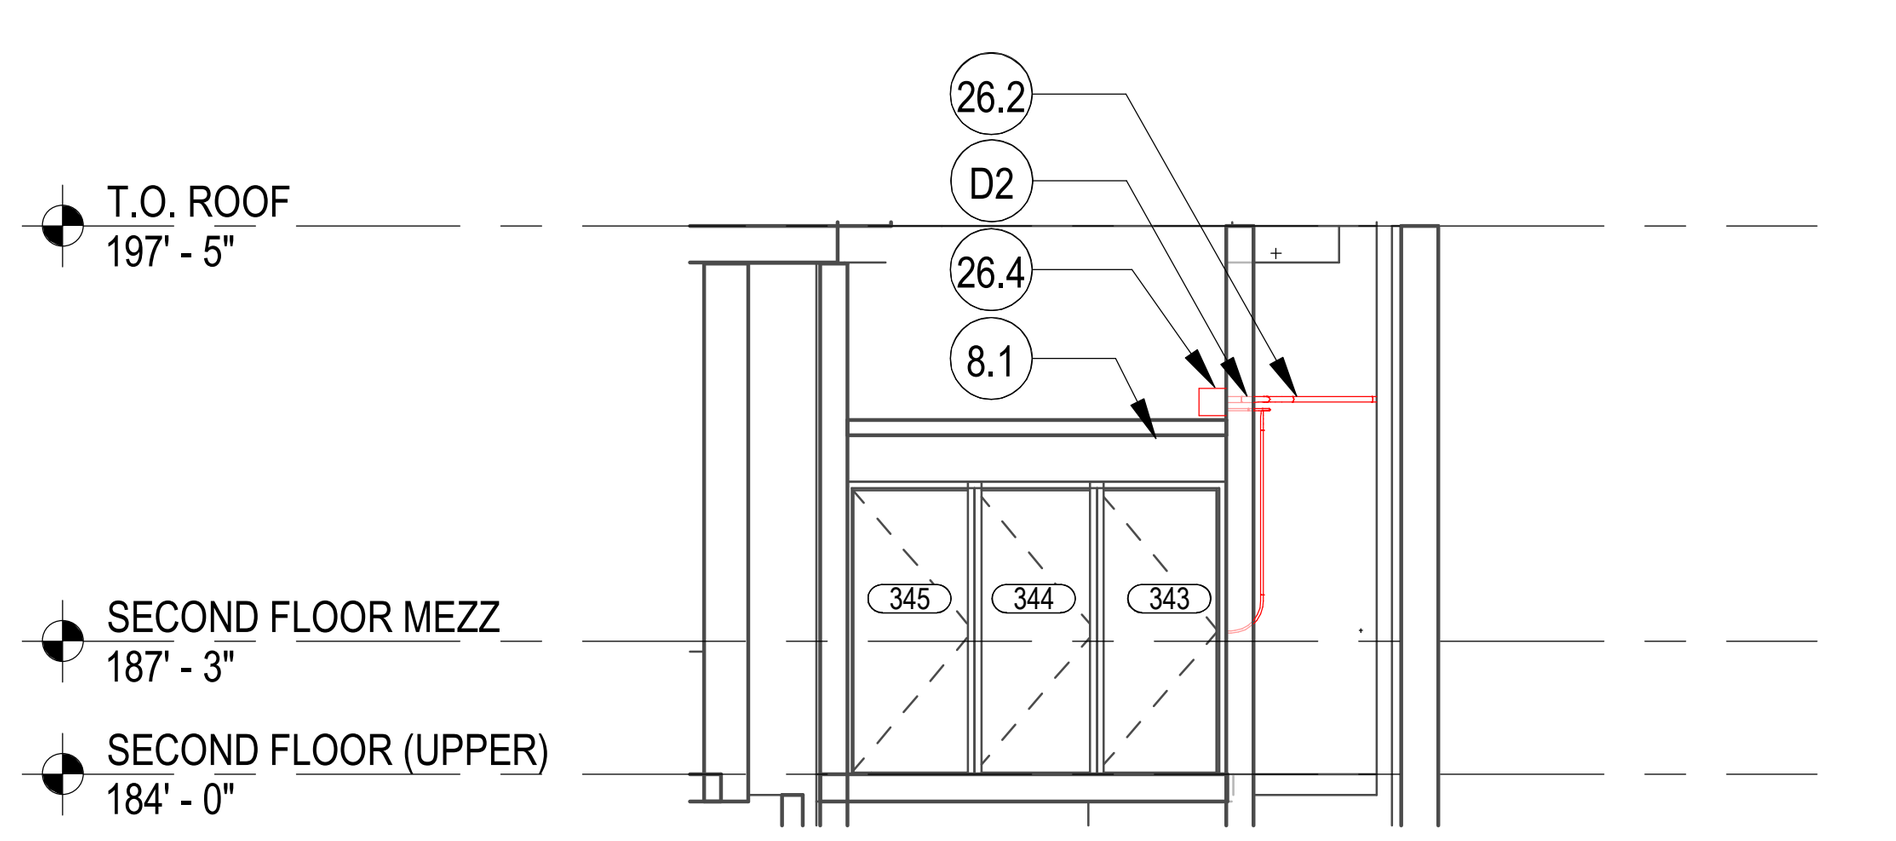

5 GROUP I_TRANSVERSE SECTION

SCALE: 1/8" = 1'-0"

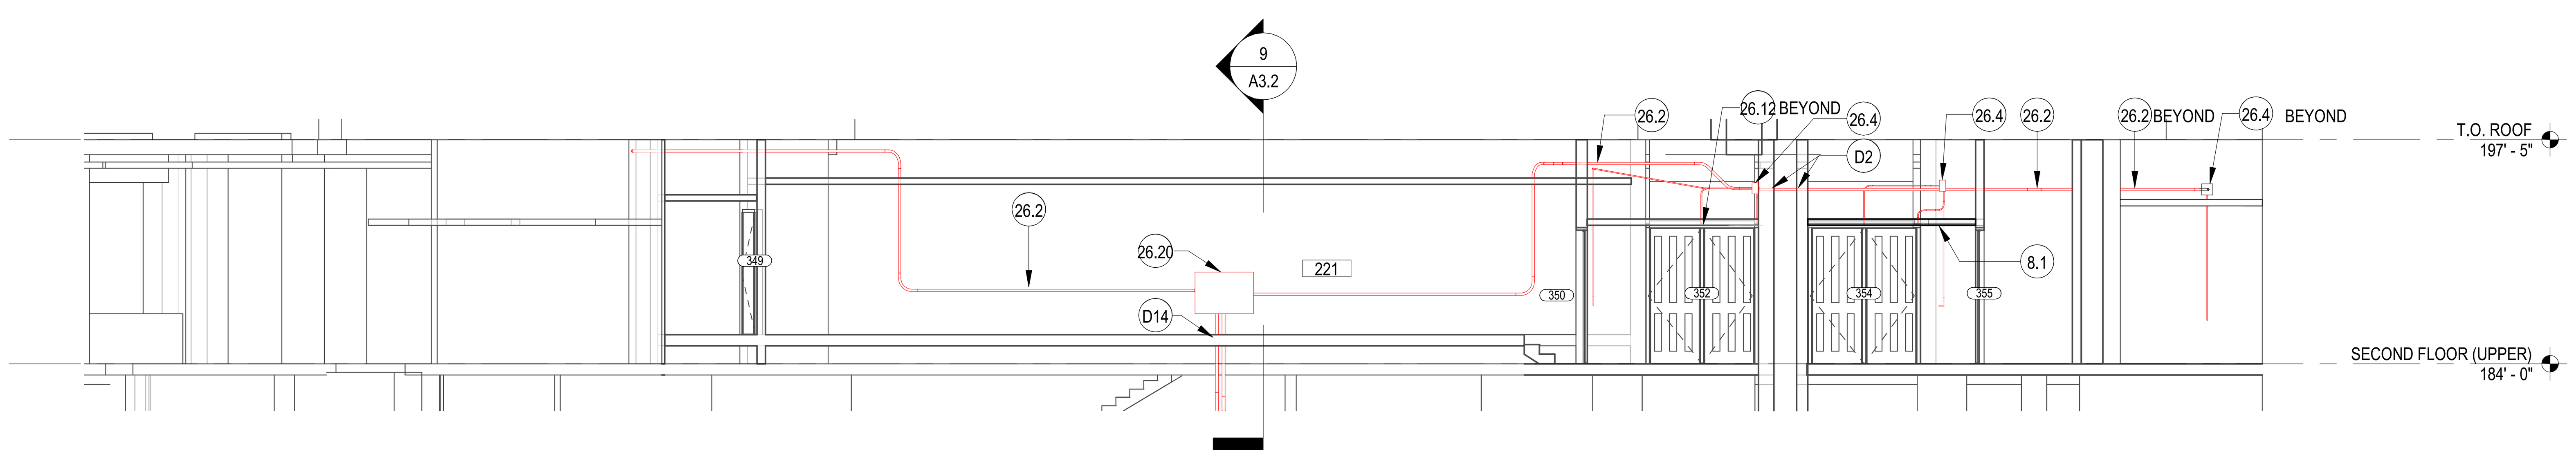

6 GROUP I TO J GROUP I_ CONDUIT ROUTE

SCALE: 1/8" = 1'-0"

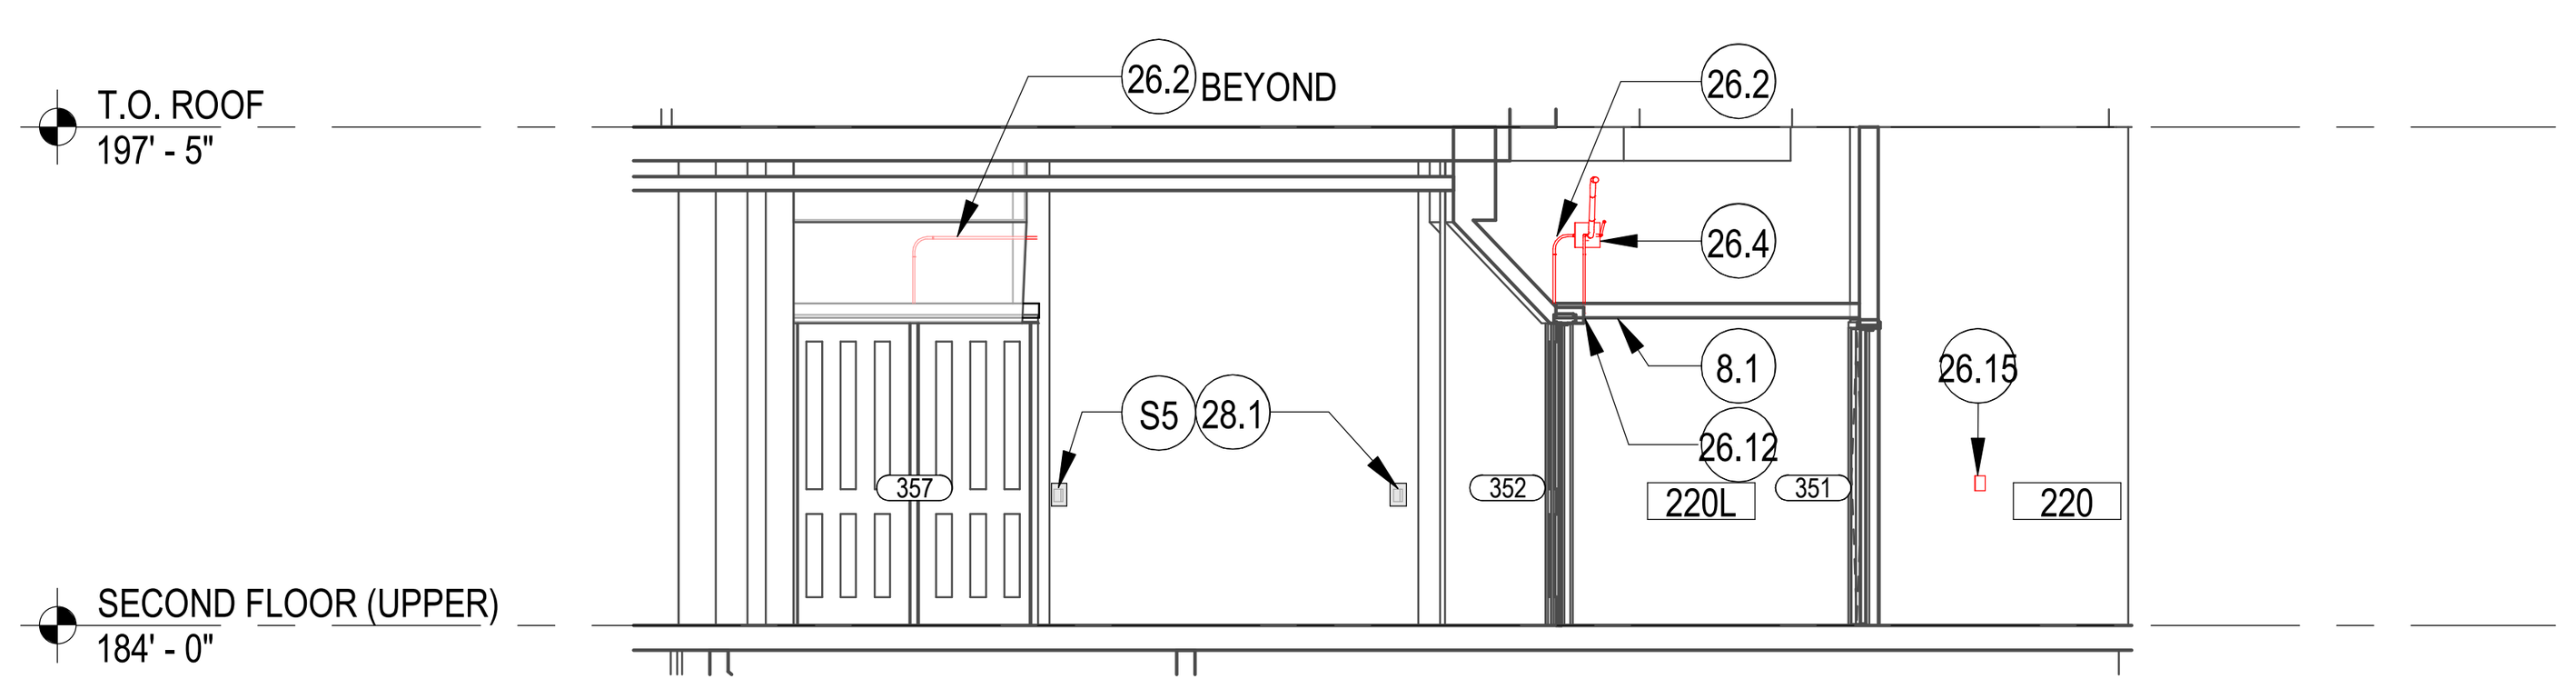

7 GROUP J_TRANSVERSE SECTION

SCALE: 1/8" = 1'-0"

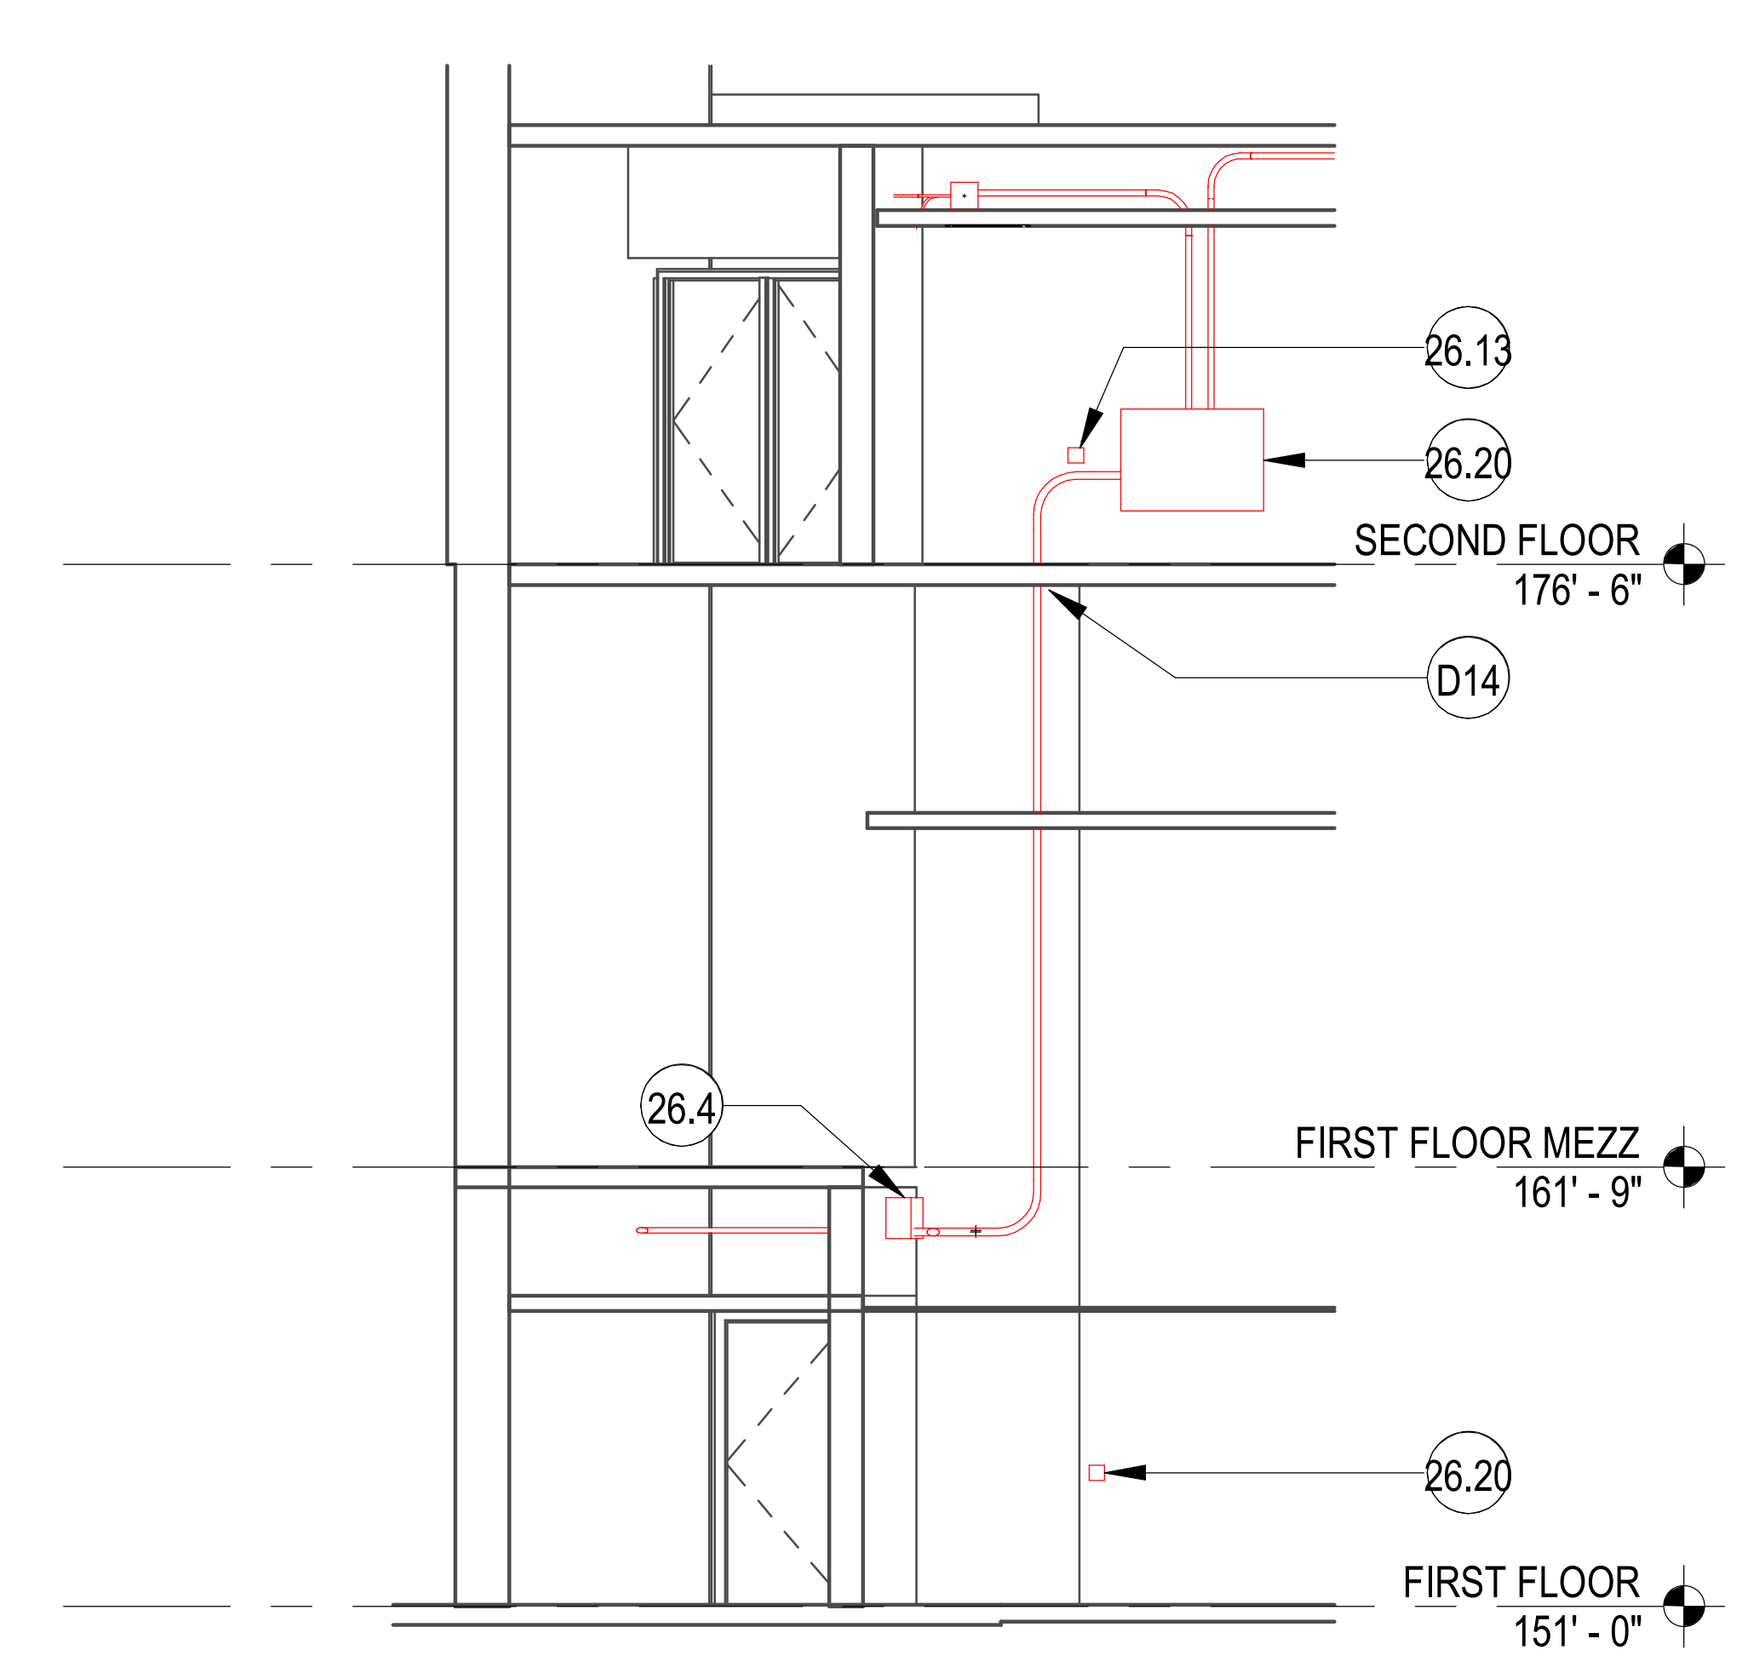

8 CONDUIT ROUTE FROM FIRST FLOOR (LOWER) TO SECOND FLOOR

SCALE: 1/8" = 1'-0"

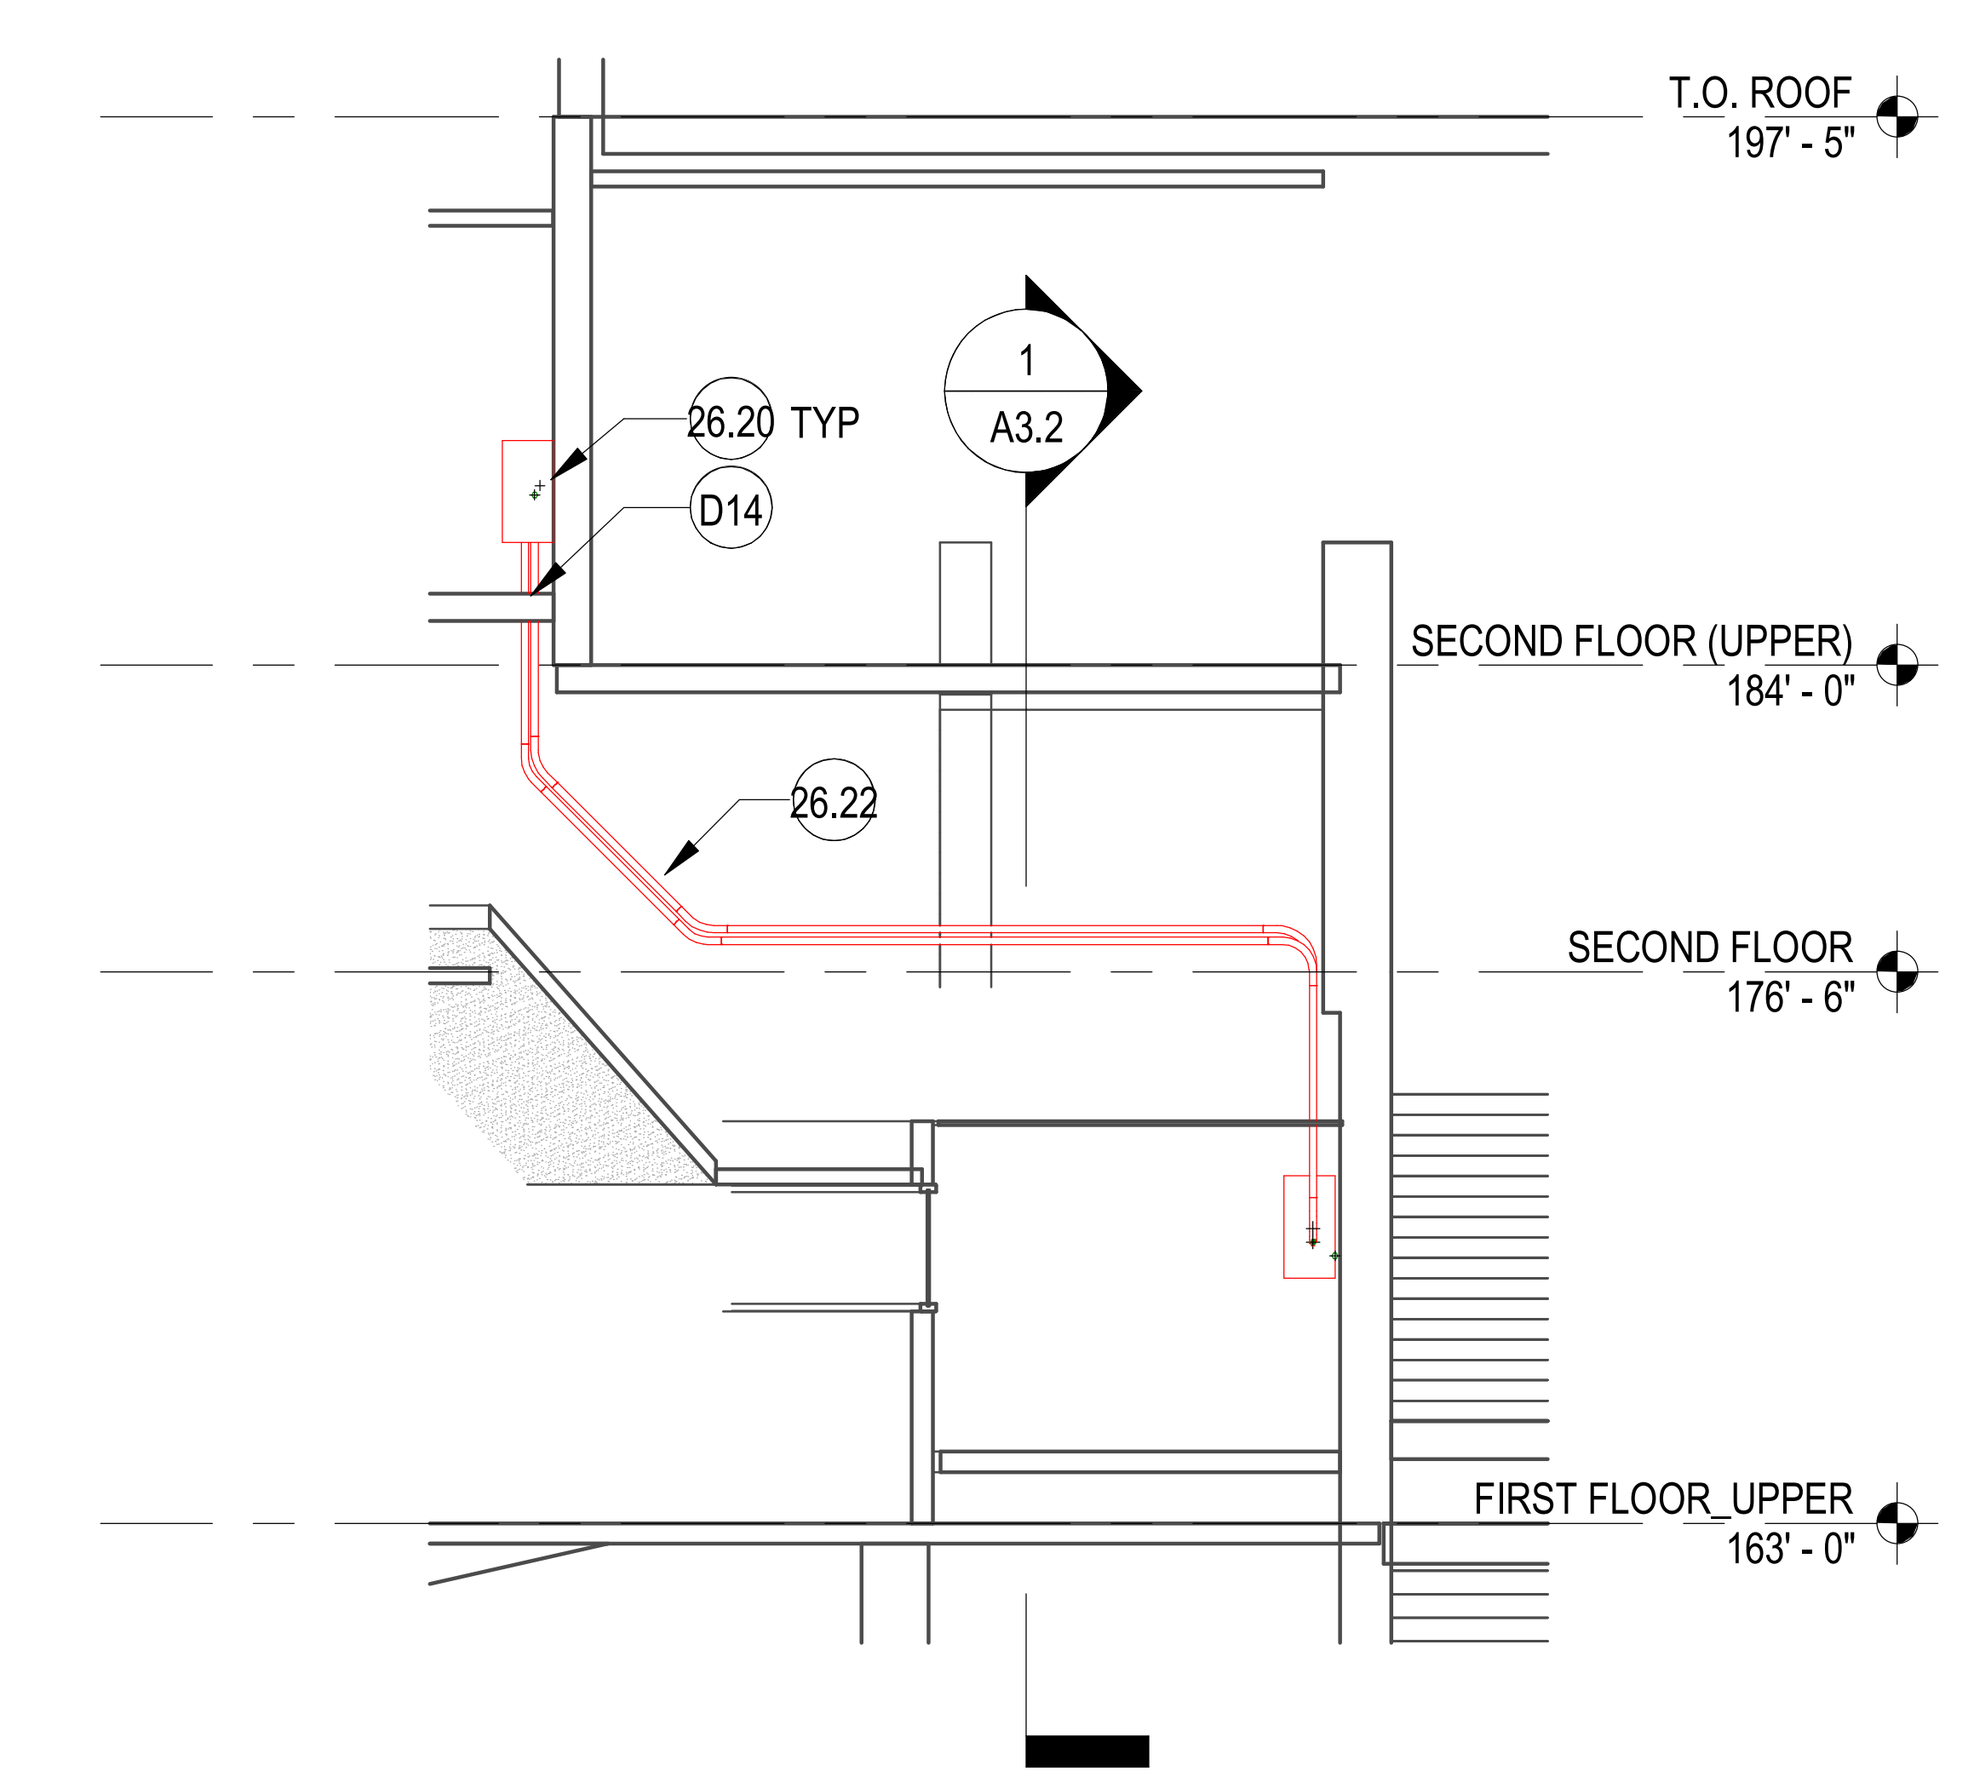

9 CONDUIT ROUTE FROM FIRST FLOOR (UPPER) & SECOND FLOOR

SCALE: 1/8" = 1'-0"

KEYNOTES

KEY	NOTE
8.1	18" x 18" ACCESS HATCH W/IN (E) GWB CEILING
26.2	WIRING; ROUTE WITHIN EMT IF EXPOSED/SURFACE MOUNTED; USE FLEXIBLE METAL CONDUIT TO ROUTE CONDUIT WITHIN (E) 1 1/2" BRICK VENEER CAVITY (SALVAGE & REINSTALL (E) BRICK AS REQUIRED); USE OPEN CABLING WITH CEILING MOUNTED J-HOOKS @ 48" OC FOR LOW-VOLTAGE WIRING ABOVE CEILING. REF ELEC
26.4	8"x8" ELEC BOX, REF ELEC
26.6	12"x12" ELEC BOX, REF ELEC
26.10	REINSTALL SALVAGED ADA OPERATOR
26.11	REINSTALL SALVAGED ADA PUSH PAD
26.12	PIEZO SOUNDER W/IN RECESSED BOX. ROUTE LOW-VOTAGE WIRING AND FLEXIBLE METAL CONDUIT TO CONTROL BOX, REF ELEC
26.13	PANEL INTERFACE MODULE (PIM), REF ELEC
26.15	EMERGENCY CLASS LOCKDOWN BUTTON, SALVAGE & REINSTALL (E) FINISHES AS REQ TO INSTALL RECESSED BOX AND RECESS LOW-VOLTAGE WIRING, REF ELEC
26.20	CAAMS PANEL, REF ELEC
26.22	(2) 2" CONDUITS ROUTE FROM FIRST FLOOR (UPPER) TO SECOND FLOOR CAAMS PANEL, REF ELEC
28.1	CARD READER W/ RECESSED ELEC BOX, REF ELEC
D2	DRILL THROUGH (E) CONC WALL (ASSUME 8" THICK) FOR CONDUIT INSTALLATION. PATCH OPENING ONCE CONDUIT IS INSTALLED
D14	CORE THROUGH (E) ELEVATED CONC SLAB
S1	SALVAGE & REINSTALL (E) ADA OPERATOR
S5	SALVAGE & REINTALL (E) BRICK AS REQ TO INSTALL CONCEALED CONDUIT/WIRING WITHIN (E) BRICK VENEER CAVITY

SHEET NOTES

1. REF ELEC FOR ADDITIONAL EQUIPMENT
2. CONDUITS SHALL BE CONCEALED IN WALLS, CHASES, ABOVE SUSPENDED CEILINGS, BELOW FLOORS OR BE FURRED-IN IN ROOMS WITH EXISTING CEILINGS, UNLESS OTHERWISE NOTED.
3. REF SPEC FOR FIRESTOPPING REQUIREMENTS AT WALL PENETRATIONS
4. REFER TO PLANS FOR ADDITIONAL WORK NOT INDICATED IN ELEVATION/SECTION.
5. REFER TO SECTION 00 31 00 (AVAILABLE INFORMATION) FOR ADDITIONAL EXISTING CONDITION INFORMATION

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL
CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

BUILDING SECTIONS

SHEET No.

A3.2

4/14/2026 10:14:36 AM

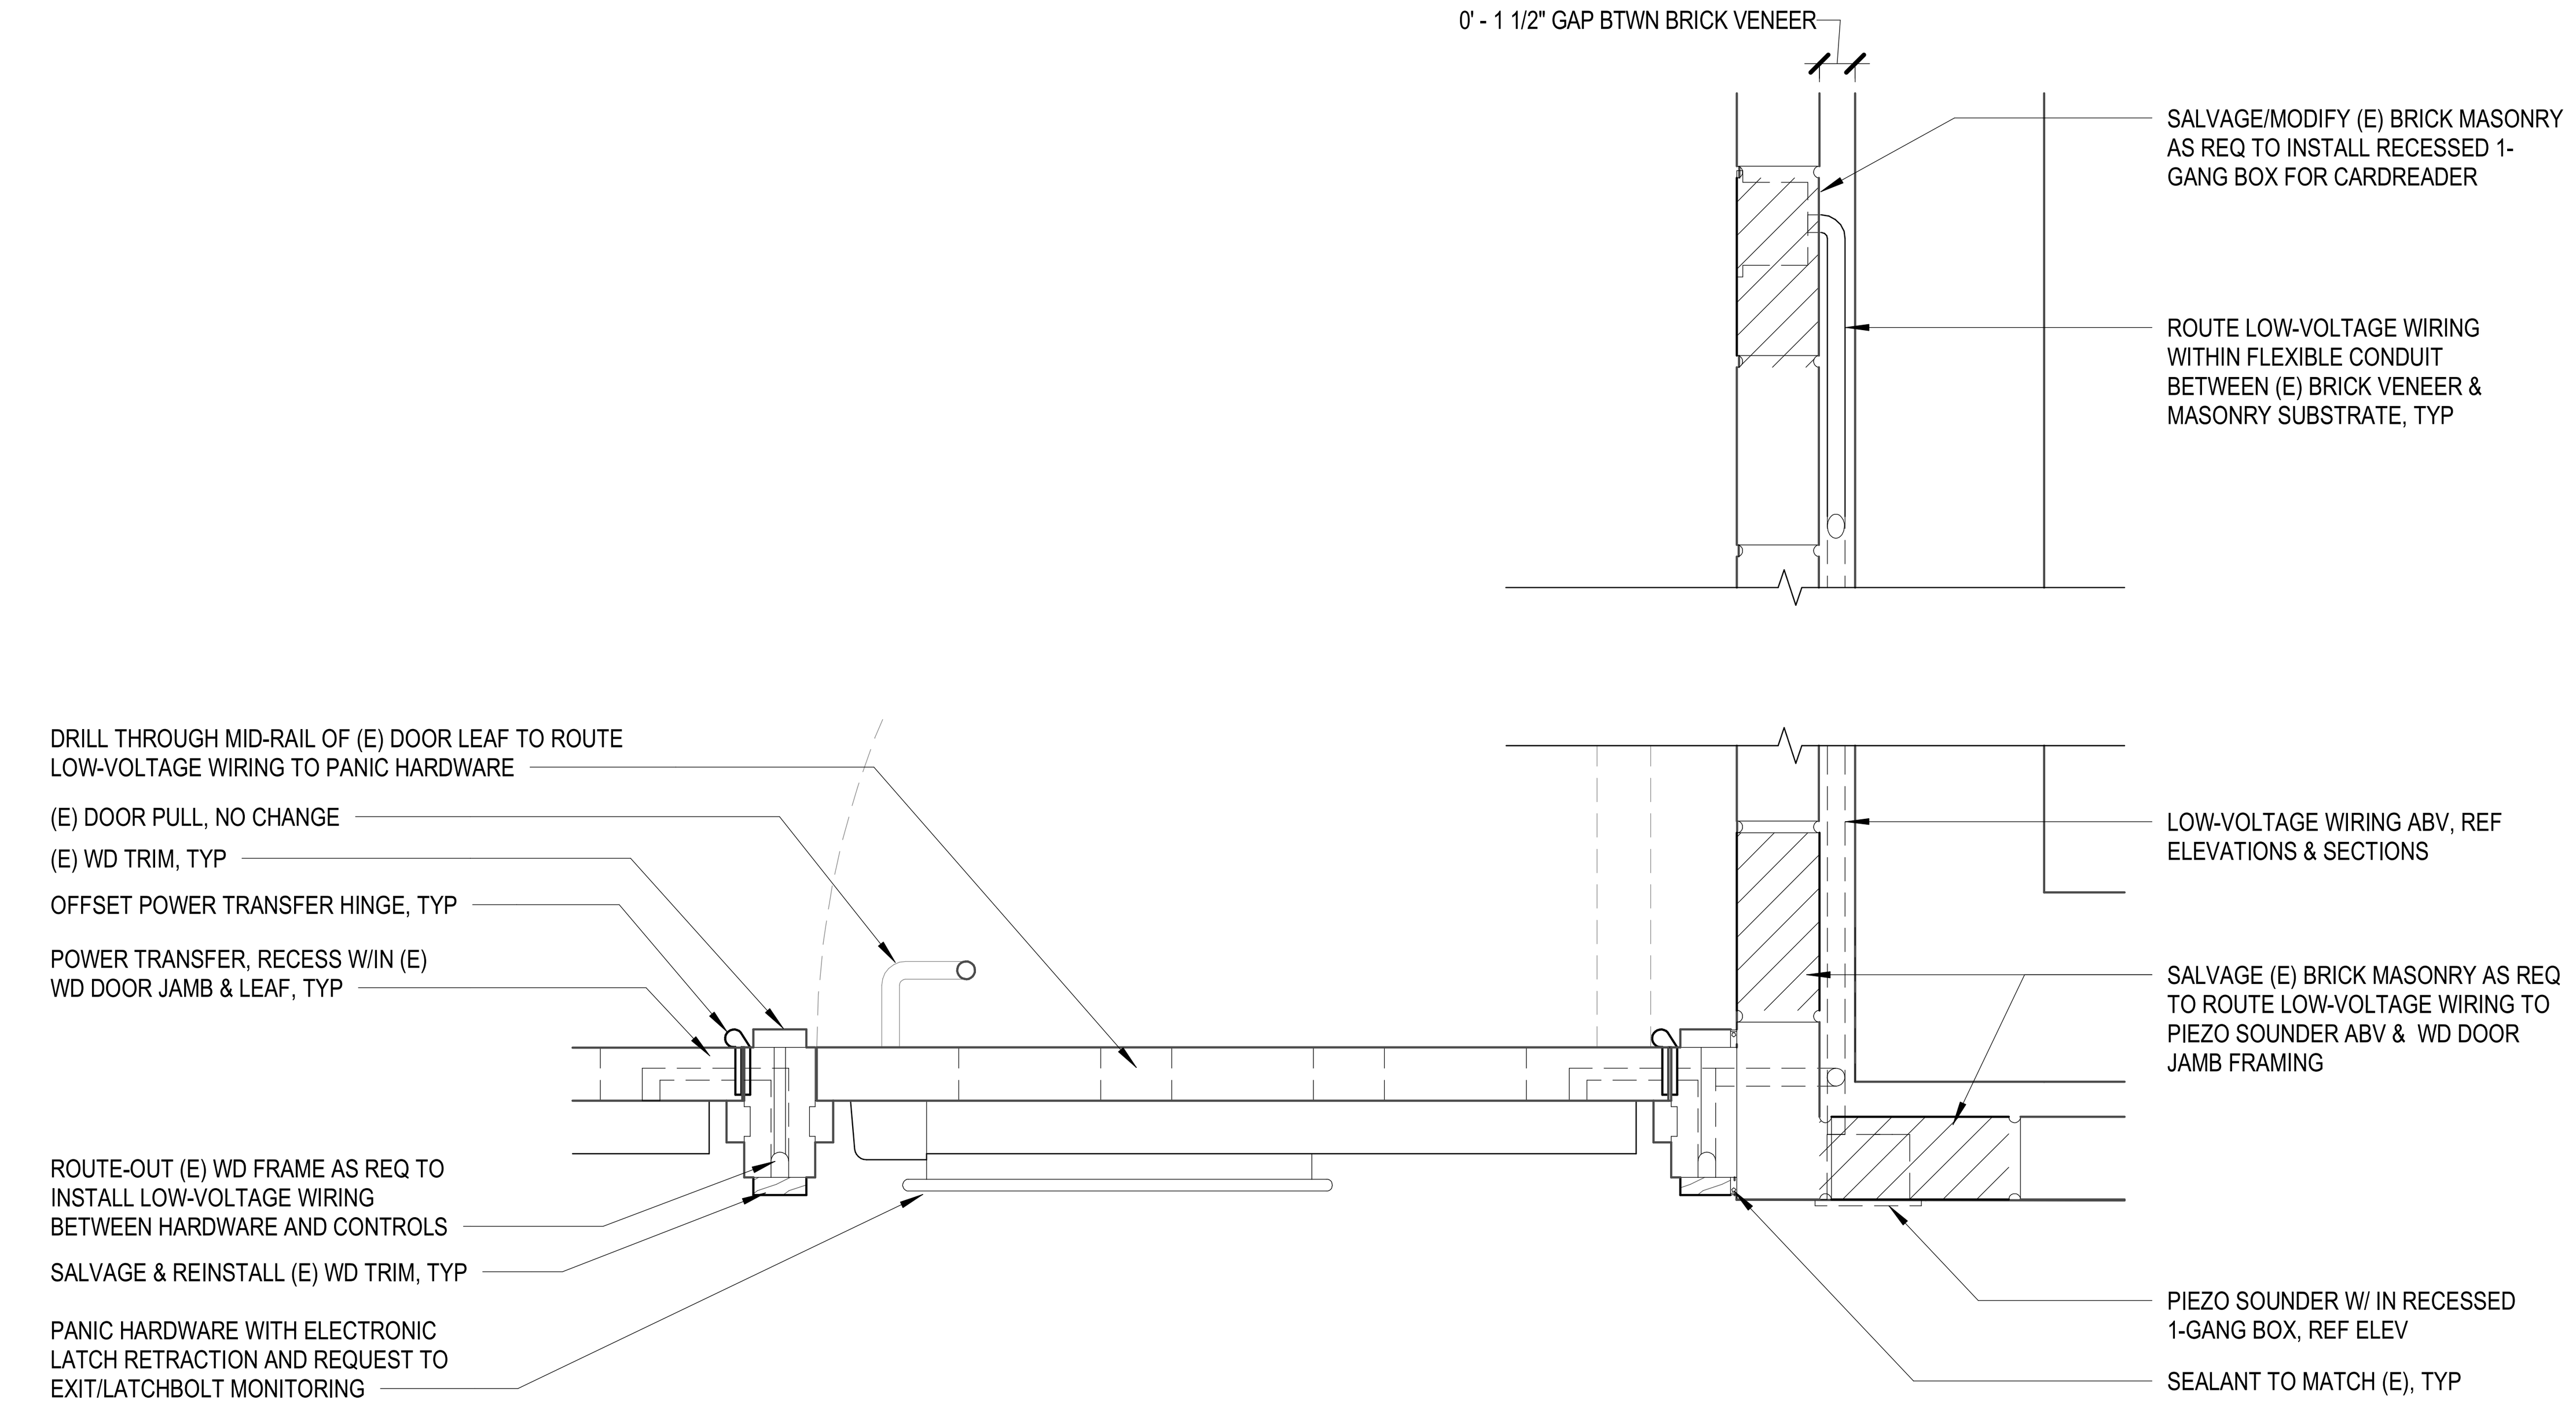

1 TYP DOOR PREP & WIRING
SCALE: 1 1/2" = 1'-0"

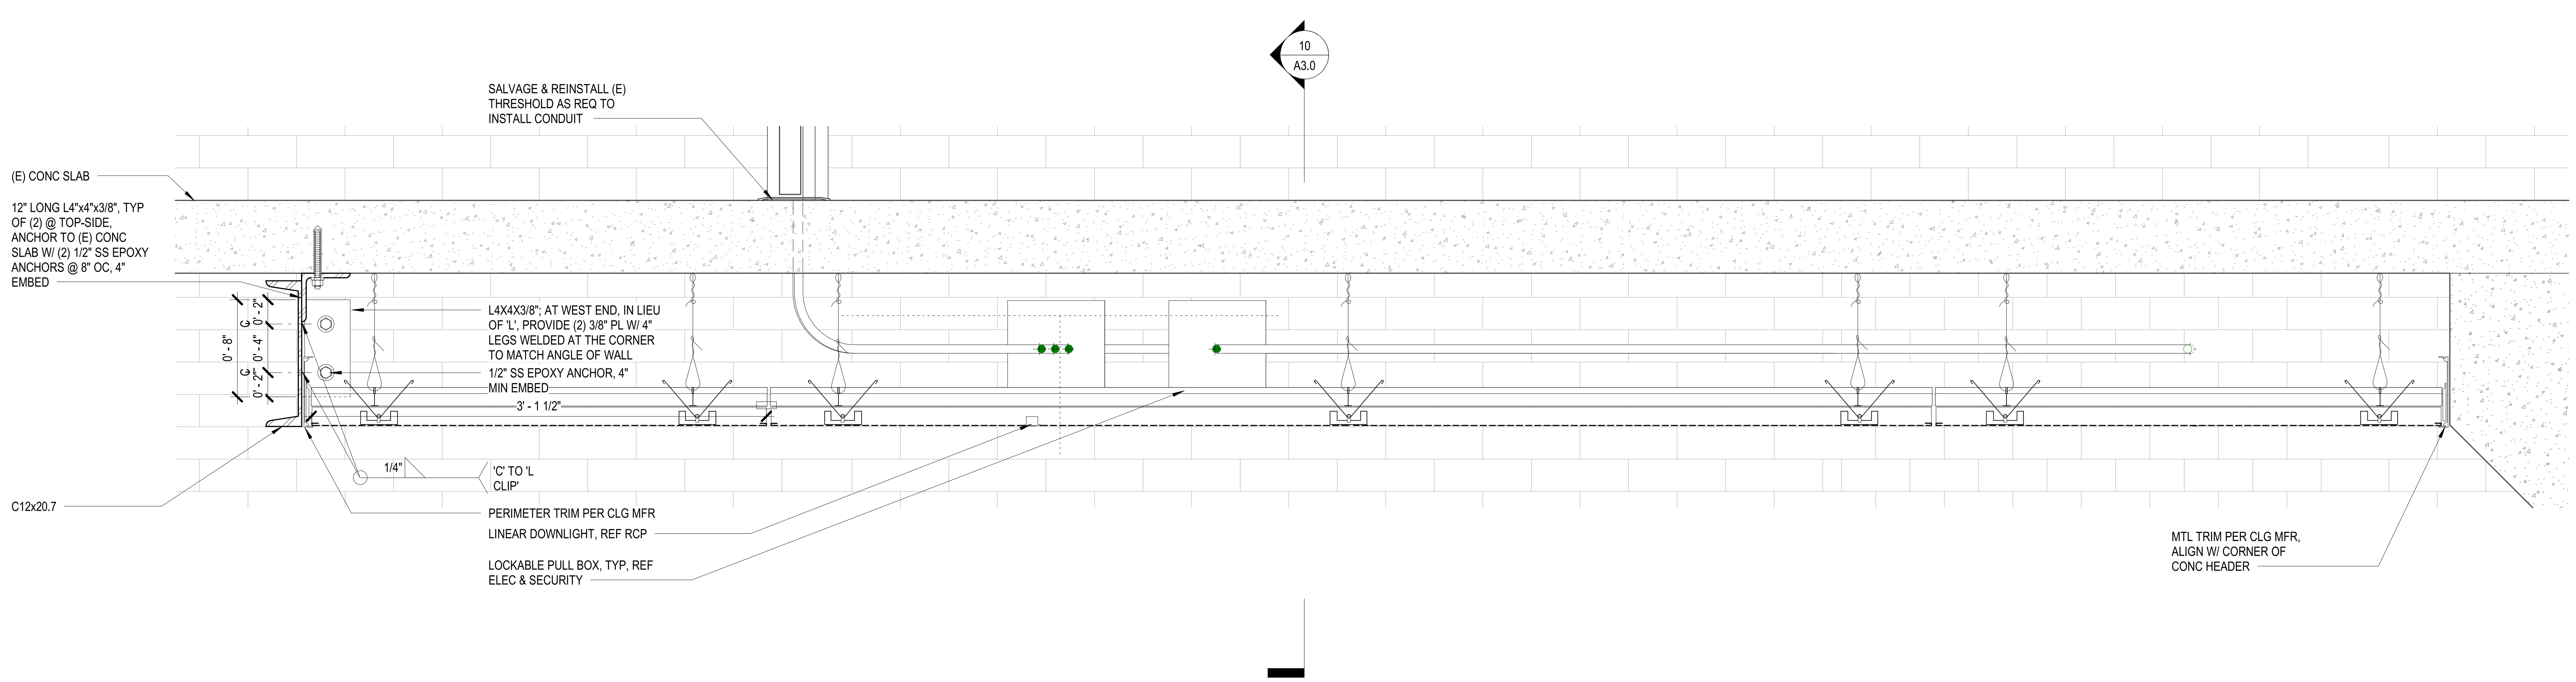

2 PERFORATED METAL CEILING & VALANCE
SCALE: 1 1/2" = 1'-0"

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL
CAAMs UPGRADES

BID SET

CONSULTANT NAME

shks ARCHITECTS

Seattle HQ
PH: 206.675.9151
info@shksarchitects.com
1050 N 38th Street
Seattle, WA 98103

SEAL

5158 REGISTERED ARCHITECT
JONATHAN H. HARTUNG
STATE OF WASHINGTON

KEYPLAN

REV	DESCRIPTION	DATE

DATE	4/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	SHKS
CHECKED	JH
APPROVED	
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	

SHEET NAME

DETAILS

SHEET No.

A4.0

4/14/2026 10:14:37 AM

LUMINAIRE SCHEDULE

TYPE	DESCRIPTION	MANUFACTURER	MODEL SERIES	LIGHT SOURCE	COLOR TEMP	DELIVERED LUMENS	INPUT WATTS	FINISH	REMARKS
A1	1-INCH WET LOCATION RECESSED LINEAR LED LIGHT, 4FT	ALCON LIGHTING	12100-8-R	LED	4000	2000	36 VA	BY ARCHITECT	EXISTING CIRCUITING AND CONTROL SHALL REMAIN

GENERAL

- EXISTING ELECTRICAL TO BE REMOVED
- EXISTING ELECTRICAL TO REMAIN
- NEW ELECTRICAL WORK
- MATCHLINE OR PROPERTY LINE
- ENLARGED PLAN BOUNDARY
- 1 / E1.01 — DETAIL/PLAN IDENTIFIER
- 1 / E1.01 — SECTION IDENTIFIER
- 1 / E1.01 — ELEVATION IDENTIFIER
- REVISION DEFINITION AREA, AREA ENCIRCLED CONTAINS CHANGES MADE SUBSEQUENT TO PREVIOUS ISSUE
- 1 — REVISION CALLOUT
- 1 — FLAG NOTE CALLOUT
- 1 — DEMOLITION NOTE TAG
- 1 — EQUIPMENT TAG
- AHU-01 — MECHANICAL EQUIPMENT TAG
- NORTH ARROW
- 1 — LOCATION WHERE PICTURE WAS TAKEN AND DIRECTION

RACEWAY AND BOXES

- J — JUNCTION BOX
- J F — FURNITURE WALL FEED OUTLET BOX
- PB XX — PULL BOX (WHERE INDICATED, SUBSCRIPT INDICATES PULL BOX NUMBER)
- HH — HANDHOLE (WHERE INDICATED, SUBSCRIPT INDICATES HANDHOLE NUMBER)
- XX — VAULT (WHERE INDICATED, SUBSCRIPT INDICATES VAULT TYPE)
- A — FLOORBOX (WHERE INDICATED, SUBSCRIPT INDICATES FLOOR BOX TYPE)
- A — POKE-THRU (WHERE INDICATED, SUBSCRIPT INDICATES FLOOR POKE-THRU TYPE)
- POWER POLE, FLOOR TO CEILING
- SURFACE METAL RACEWAY
- RACEWAY CONCEALED IN-WALL OR IN-CEILING (EXPOSED IN UNFINISHED AREAS)
- RACEWAY RUN BELOW FLOOR OR BELOW GRADE
- FLEXIBLE RACEWAY
- RACEWAY (CIRCLE DENOTES VERTICAL TRANSITION)
- RACEWAY CONTINUATION
- RACEWAY STUB WITH BUSHINGS
- RACEWAY SLEEVE WITH BUSHINGS
- FIRE STOPPING SLEEVE
- CABLE TRAY, 12"W x 4"H OVERHEAD, UNLESS OTHERWISE NOTED
- CABLE TRAY, OVERHEAD LADDER TYPE
- HA- — HOMERUN TO PANEL (INDICATES PANEL DESIGNATION AND CIRCUIT NUMBER)
- # — (GAUGE OF WIRE OTHER THAN AWG#12) NUMBER OF CONDUCTORS (GROUND CONDUCTOR) (PHASE CONDUCTORS) (NEUTRAL CONDUCTOR)

POWER

- SWITCHBOARD/SWITCHGEAR
- PANELBOARD, FLUSH-MOUNTED
- PANELBOARD, SURFACE-MOUNTED
- EQUIPMENT CONNECTION. CONFIRM CONNECTION WITH EQUIPMENT MANUFACTURER

LIGHTING

- LIGHTING FIXTURE (REFER TO LIGHTING FIXTURE SCHEDULE FOR ADDITIONAL INFORMATION)

GROUNDING

- G — GROUNDING CONDUCTOR
- GROUNDING ROD
- GROUNDING BUSBAR
- EQUIPMENT GROUNDING CONNECTION
- GROUNDING STRAP

NOT ALL SYMBOLS MAY APPEAR ON THE DRAWINGS

DRAWING INDEX

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMS

BID SET

CONSULTANT NAME

shks ARCHITECTS

HARGIS

1201 third avenue, ste 600
seattle, wa 98101
206.448.3376
www. hargis.biz

SEAL

ERIK S. STEARNS
REGISTERED PROFESSIONAL ENGINEER

04/15/26

KEYPLAN

REV	DESCRIPTION	DATE

DATE	04/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	TV
CHECKED	BH
APPROVED	DS
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	KNE

SHEET NAME

ELECTRICAL LEGEND AND DRAWING INDEX

SHEET No.

E0.1

4/10/2026 1:51:46 PM

GENERAL NOTES

1. PERFORM WORK IN ACCORDANCE WITH APPLICABLE NATIONAL AND STATE CODES AS AMENDED LOCALLY AND ENFORCED BY THE AHJ.
2. OBTAIN AND PAY FOR PERMITS REQUIRED FOR INSTALLATION OF WORK. ARRANGE AND SCHEDULE REQUIRED INSPECTIONS.
3. DEVICE LOCATIONS ARE APPROXIMATE. COORDINATE DEVICE LOCATIONS AND ELEVATIONS WITH APPROPRIATE DOCUMENTS INCLUDING CASEWORK SHOP DRAWINGS AND ARCHITECT'S INTERIOR ELEVATIONS PRIOR TO ROUGH-IN.
4. COORDINATE ELECTRICAL WORK WITH THAT OF OTHER TRADES. REFER TO ARCHITECTURAL, DRAWINGS AND SPECIFICATIONS. COORDINATION SHALL OCCUR PRIOR TO FABRICATION, PURCHASE, AND INSTALLATION OF WORK.
5. REFER TO ARCHITECTURAL AND STRUCTURAL DRAWINGS FOR LOCATIONS OF EXPANSION/SEISMIC JOINTS. PROVIDE RACEWAY EXPANSION/SEISMIC JOINTS FOR RACEWAYS CROSSING BUILDING EXPANSION/SEISMIC JOINTS.
6. DEMOLISH EXISTING SYSTEMS AS INDICATED ON PLANS OR AS REQUIRED FOR INSTALLATION OF NEW WORK. MATERIAL SHALL BE REMOVED FROM SITE AND LEGALLY DISPOSED OF OFF SITE UNLESS OTHERWISE DIRECTED. RETURN ITEMS TO OWNER IN EXISTING CONDITION WHEN DIRECTED BY OWNER.
7. COMPLETION OF WORK SHALL BE EXECUTED IN ACCORDANCE WITH THE PROJECT SCHEDULE. SCHEDULE INSTALLATION WITH OTHER TRADES TO ENSURE PROJECT MILESTONES ARE MET.
8. DRAWINGS ARE DIAGRAMMATIC AND DO NOT SHOW ALL COMPONENTS REQUIRED FOR A COMPLETE INSTALLATION. PROVIDE COMPONENTS REQUIRED FOR COMPLETE AND OPERATIONAL SYSTEMS INCLUDING RACEWAYS, CONDUCTORS, BOXES, SUPPORTS AND SIMILAR ITEMS.
9. BRANCH CIRCUIT HOMERUNS ARE SHOWN TO INDICATE CIRCUIT PROPERTIES AND CONFIGURATION. SINGLE-CIRCUIT HOMERUNS SERVED FROM THE SAME PANELBOARD MAY BE COMBINED IN ACCORDANCE WITH THE DIVISION 26 SPECIFICATIONS, UNLESS INDICATED OTHERWISE. EXTEND AND CONNECT BRANCH CIRCUIT RACEWAY AND WIRING FROM HOMERUN TO DEVICES AND EQUIPMENT WITH CIRCUIT NUMBERS INDICATED. CONDUCTOR QUANTITIES AND SIZES ARE INDICATED AT HOMERUNS ONLY. SHOW ACTUAL RACEWAY ROUTING AND CIRCUITING ON RECORD DRAWINGS. MINIMUM CONDUCTOR SIZE #12 AWG.

ABBREVIATIONS

A	AMPERE
AC	AIR CONDITIONING; ALTERNATING CURRENT, ABOVE COUNTER
AF	AMP FUSE; AMP FRAME
AFC	AVAILABLE FAULT CURRENT
AFF	ABOVE FINISHED FLOOR
AG	ABOVE GRADE
AHJ	AUTHORITIES HAVING JURISDICTION
AHU	AIR HANDLING UNIT
AL	ALUMINUM
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE
AS	AMP SWITCH
AT	AMP TRIP
ATS	AUTOMATIC TRANSFER SWITCH
AV	AUDIO VISUAL
AWG	AMERICAN WIRE GAUGE
BAS	BUILDING AUTOMATION SYSTEM
BATT	BATTERIES
BIL	BASIC IMPULSE INSULATION LEVEL
BKBD	BACKBOARD
BKR	BREAKER
BLDG	BUILDING
C	CONDUIT; DEGREES CELCIUS
CAB	CABINET
CAT	CATEGORY
CATV	COMMUNITY ANTENNA TELEVISION
CB	CIRCUIT BREAKER
CCTV	CLOSED CIRCUIT TELEVISION
CLG	CEILING
CM	CEILING-MOUNTED
CO	CONDUIT ONLY
CR	CONTROLLED RECEPTACLE
CU	COPPER
D	DEDICATED
DDC	DIRECT DIGITAL CONTROL
DEMARC	DEMARCATION POINT
DISC	DISCONNECT
DIST	DISTRIBUTION
DSL	DIGITAL SUBSCRIBER LINE
DWG	DRAWING
(E)	EXISTING
EA	EACH
EIA	ELECTRONIC INDUSTRIES ASSOCIATION
ELEV	ELEVATION
EM	EMERGENCY
EMT	ELECTRICAL METALLIC TUBING
ENCL	ENCLOSURE
EPM	ELECTRONIC POWER METER
EPO	EMERGENCY POWER OFF
EQUIP	EQUIPMENT
ETR	EXISTING TO REMAIN
F	FUSES; DEGREES FAHRENHEIT
FA	FIRE ALARM
FAAP	FIRE ALARM ANNUNCIATOR PANEL
FACP	FIRE ALARM CONTROL PANEL
FBO	FURNISHED BY OWNER
FOIC	FURNISHED BY OWNER INSTALLED BY CONTRACTOR
FOIO	FURNISHED BY OWNER INSTALLED BY OWNER
G	GROUND
GB	GROUND FAULT CIRCUIT INTERRUPTER BREAKER
GF	GROUND FAULT CIRCUIT INTERRUPTER
GFP	GROUND FAULT PROTECTION
GND	GROUND
GRS	GALVANIZED RIGID STEEL
HC	HORIZONTAL CROSS CONNECT
HID	HIGH INTENSITY DISCHARGE
HP	HORSEPOWER
HTR	HEATER
Hz	HERTZ
IBC	INTERNATIONAL BUILDING CODE
IC	INTERMEDIATE CROSS CONNECT
IDF	INTERMEDIATE DISTRIBUTION FRAME
IEEE	INSTITUTE OF ELECTRICAL AND ELECTRONIC ENGINEERS
IG	ISOLATED GROUND
IMC	INTERMEDIATE METALLIC CONDUIT
ISDN	INTEGRATED SERVICES DIGITAL NETWORK
J	JUNCTION
K	KIRK KEY
KCMIL	THOUSAND CIRCULAR MILS
kVA	KILOVOLT AMPERE
KVAR	KILOVOLT AMPERE REACTIVE
kW	KILOWATT
LAN	LOCAL AREA NETWORK
LCP	LIGHTING CONTROL PANEL
LEC	LOCAL EXCHANGE CARRIER
LTG	LIGHTING
M	METER
MAN	METROPOLITAN AREA NETWORK
MAX	MAXIMUM
MC	MAIN CROSS CONNECT; METAL CLAD (CABLE)
MCB	MAIN CIRCUIT BREAKER
MDF	MAIN DISTRIBUTION FRAME
MDP	MAIN DISTRIBUTION PANEL
MFR	MANUFACTURER
MH	MANHOLE
MIN	MINIMUM
MLO	MAIN LUGS ONLY
MM	MULTIMODE
MPOE	MAIN POINT OF ENTRY
MTD	MOUNTED
MTS	MANUAL TRANSFER SWITCH
MV	MEDIUM VOLTAGE
(N)	NEW
N	NEUTRAL
NAC	NOTIFICATION APPLIANCE CIRCUIT
NEC	NATIONAL ELECTRICAL CODE
NEMA	NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION
NF	NON-FUSED
NIC	NOT IN CONTRACT
OFC	OPTICAL FIBER CABLE
OHL	OVERHEAD LINE
OL	OVERLOAD
OS	OCCUPANCY SENSOR
OSP	OUTSIDE PLANT
P	POLE
PH	PHASE
PIR	PASSIVE INFRARED
PIV	POST INDICATING VALVE
PNL	PANEL
PP	PATCH
PVC	POLYVINYL CHLORIDE
RCP	REFLECTED CEILING PLAN
REC	RECEPTACLE
REF	REFER TO
REV	REVISION
RM	ROOM
RMC	RIGID METALLIC CONDUIT
RTRC	REINFORCED THERMOSETTING RESIN CONDUIT
RU	RACK UNIT
SHT	SHEET
SM	SINGLEMODE
SMFC	SURFACE-MOUNTED OPTICAL FIBER CABINET
SMR	SURFACE METAL RACEWAY
SP	SERVICE PROVIDER
SPD	SURGE PROTECTIVE DEVICE
SPEC	SPECIFICATIONS
SPST	SINGLE POLE SINGLE THROW
ST	SHUNT TRIP
STP	SHIELDED TWISTED PAIR
SVGA	SUPER VIDEO GRAPHICS ARRAY
SW	SWITCH
SWBD	SWITCHBOARD
TBB	TELECOMMUNICATIONS BONDING BACKBONE
TEL	TELEPHONE
TELCO	TELEPHONE COMPANY
TGB	TELECOMMUNICATIONS GROUNDING BUSBAR
TIA	TELECOMMUNICATIONS INDUSTRY ASSOCIATION
TMGB	TELECOMMUNICATIONS MAIN GROUNDING BUSBAR
TP	TAMPERPROOF
TR	TELECOMMUNICATIONS ROOM
TV	TELEVISION
TVSS	TRANSIENT VOLTAGE SURGE SUPPRESSION
TYP	TYPICAL
UG	UNDERGROUND
UL	UNDERWRITERS LABORATORIES
UON	UNLESS OTHERWISE NOTED
UPS	UNINTERRUPTIBLE POWER SUPPLY
USB	UNIVERSAL SERIAL BUS
UTP	UNSHIELDED TWISTED PAIR
UV	UNIT VENTILATOR
V	VOLTS
VA	VOLT AMPERES
VFD	VARIABLE FREQUENCY DRIVE
W	WASTE, WATT, WIDE, WATER
W/	WITH
W/O	WITHOUT
WA	WORKSTATION AREA
WAN	WIDE AREA NETWORK
WG	WIRE GUARD
WP	WEATHERPROOF

NON-STRUCTURAL ELECTRICAL COMPONENT NOTES

1. THE FOLLOWING ITEMS ARE TAKEN DIRECTLY FROM THE 2021 INTERNATIONAL BUILDING CODE AND FROM THE AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE) STANDARD 7. THE CONTRACTOR SHALL REFER TO THE ABOVE FOR ADDITIONAL INFORMATION, EXCEPTIONS, AND FURTHER DESCRIPTIONS. THE CONTRACTOR SHALL ADHERE TO REQUIREMENTS AND AS SUCH, SHALL BE INCLUDED WITHIN BID. ALSO REFER TO SPECIFICATIONS.
2. 2021 IBC, 1613.1, SCOPE: ARCHITECTURAL, MECHANICAL, ELECTRICAL, AND NON-STRUCTURAL COMPONENTS THAT ARE PERMANENTLY ATTACHED TO STRUCTURES AND THEIR SUPPORTS AND ATTACHMENTS SHALL BE DESIGNED AND CONSTRUCTED TO RESIST THE EFFECTS OF EARTHQUAKE MOTIONS IN ACCORDANCE WITH ASCE 7, EXCLUDING CHAPTER 14 AND APPENDIX 11A.
3. ASCE 7 CONTRACTOR RESPONSIBILITY: THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CONSTRUCTION OF A SEISMIC-FORCE-RESISTING SYSTEM, DESIGNATED SEISMIC SYSTEM, OR COMPONENT LISTED IN THE QUALITY ASSURANCE PLAN AND SHALL SUBMIT A WRITTEN CONTRACTOR'S STATEMENT OF RESPONSIBILITY TO THE AUTHORITY HAVING JURISDICTION AND TO THE OWNER PRIOR TO THE COMMENCEMENT OF WORK ON THE SYSTEM OR COMPONENT. THE CONTRACTOR'S STATEMENT OF RESPONSIBILITY SHALL INCLUDE THE FOLLOWING:
   - A. ACKNOWLEDGMENT OF AWARENESS OF THE SPECIAL REQUIREMENTS CONTAINED IN THE QUALITY ASSURANCE PLAN;
   - B. ACKNOWLEDGMENT THAT CONTROL WILL BE EXERCISED TO OBTAIN CONFORMANCE WITH THE CONSTRUCTION DOCUMENTS APPROVED BY THE AUTHORITY HAVING JURISDICTION;
   - C. PROCEDURES FOR EXERCISING CONTROL WITHIN THE CONTRACTOR'S ORGANIZATION, THE METHOD AND FREQUENCY OF REPORTING AND THE DISTRIBUTION OF THE REPORTS; AND
   - D. IDENTIFICATION AND QUALIFICATIONS OF THE PERSON(S) EXERCISING SUCH CONTROL AND THEIR POSITION(S) IN THE ORGANIZATION.
4. DIVISION 26 RESPONSIBILITIES:
   - A. HANGERS AND SEISMIC BRACING FOR ELECTRICAL SYSTEMS SHALL BE DESIGNED AND SPECIFIED BY DIVISION 26. DIVISION 26 SHALL REFER TO THE ELECTRICAL DRAWINGS FOR LOCATIONS OF EQUIPMENT AND ELECTRICAL SYSTEMS AS STRUCTURAL DRAWINGS DO NOT SHOW THE LOCATIONS OF ELECTRICAL EQUIPMENT, RACEWAYS, AND OTHER COMPONENTS.
   - B. DIVISION 26 SHALL COORDINATE THE SUPPORT SYSTEMS AND DESIGN LOADS FOR HUNG RACEWAYS AND OTHER ELECTRICAL SYSTEMS (INCLUDING COMBINED MULTIPLE RACEWAY RUNS) WITH THE GENERAL CONTRACTOR AND THE STEEL AND WOOD JOIST MANUFACTURERS IN ADDITION TO OTHER TRADES THAT MAY BE IMPACTED.

ENERGY CODE NOTES

1. RECORD DRAWINGS: SUBMIT TO THE BUILDING OWNER PER ENERGY CODE ENFORCED BY THE LOCAL AHJ.
2. OPERATION AND MAINTENANCE MANUALS: SUBMIT TO THE BUILDING OWNER PER ENERGY CODE ENFORCED BY THE LOCAL AHJ.
3. THIS BUILDING AND ITS ENERGY SYSTEMS HAVE BEEN DESIGNED TO COMPLY WITH ENERGY CODE ENFORCED BY THE LOCAL AHJ. CONTRACTOR IS RESPONSIBLE FOR CORRECT INSTALLATION OF ENERGY CONSERVATION MEASURES.
4. LIGHTING CONTROL SYSTEMS COMMISSIONING AND COMPLETION REQUIREMENTS: TEST SYSTEMS TO ENSURE THAT BUILDING SYSTEMS HAVE BEEN INSTALLED AND FUNCTION PROPERLY AND EFFICIENTLY, AND CAN BE MAINTAINED IN ACCORDANCE WITH THE CONTRACT DOCUMENTS AND OPERATIONAL REQUIREMENTS PER ENERGY CODE ENFORCED BY THE AHJ. REFER TO SPECIFICATIONS FOR ADDITIONAL COMMISSIONING REQUIREMENTS.

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMS

BID SET

CONSULTANT NAME

shks ARCHITECTS

HARGIS

1201 third avenue, ste 600
seattle, wa 98101
206.448.3376
www. hargis.biz

SEAL

04/15/26

KEYPLAN

REV	DESCRIPTION	DATE

DATE	04/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	TV
CHECKED	BH
APPROVED	DS
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	KNE

SHEET NAME

ELECTRICAL ABBREVIATIONS AND GENERAL NOTES

SHEET No.

E0.2

4/10/2026 1:51:46 PM

SHEET NOTES

1. REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR ADDITIONAL INFORMATION FOR LOCATING LIGHT FIXTURES, LIGHT FIXTURE MOUNTING HEIGHTS, AND CEILING-MOUNTED DEVICES.
2. REFER TO LUMINAIRE SCHEDULE ON SHEET E0.1 FOR ADDITIONAL INFORMATION.
3. UTILIZE EXISTING CIRCUITING. EXISTING CONTROL SHALL REMAIN.

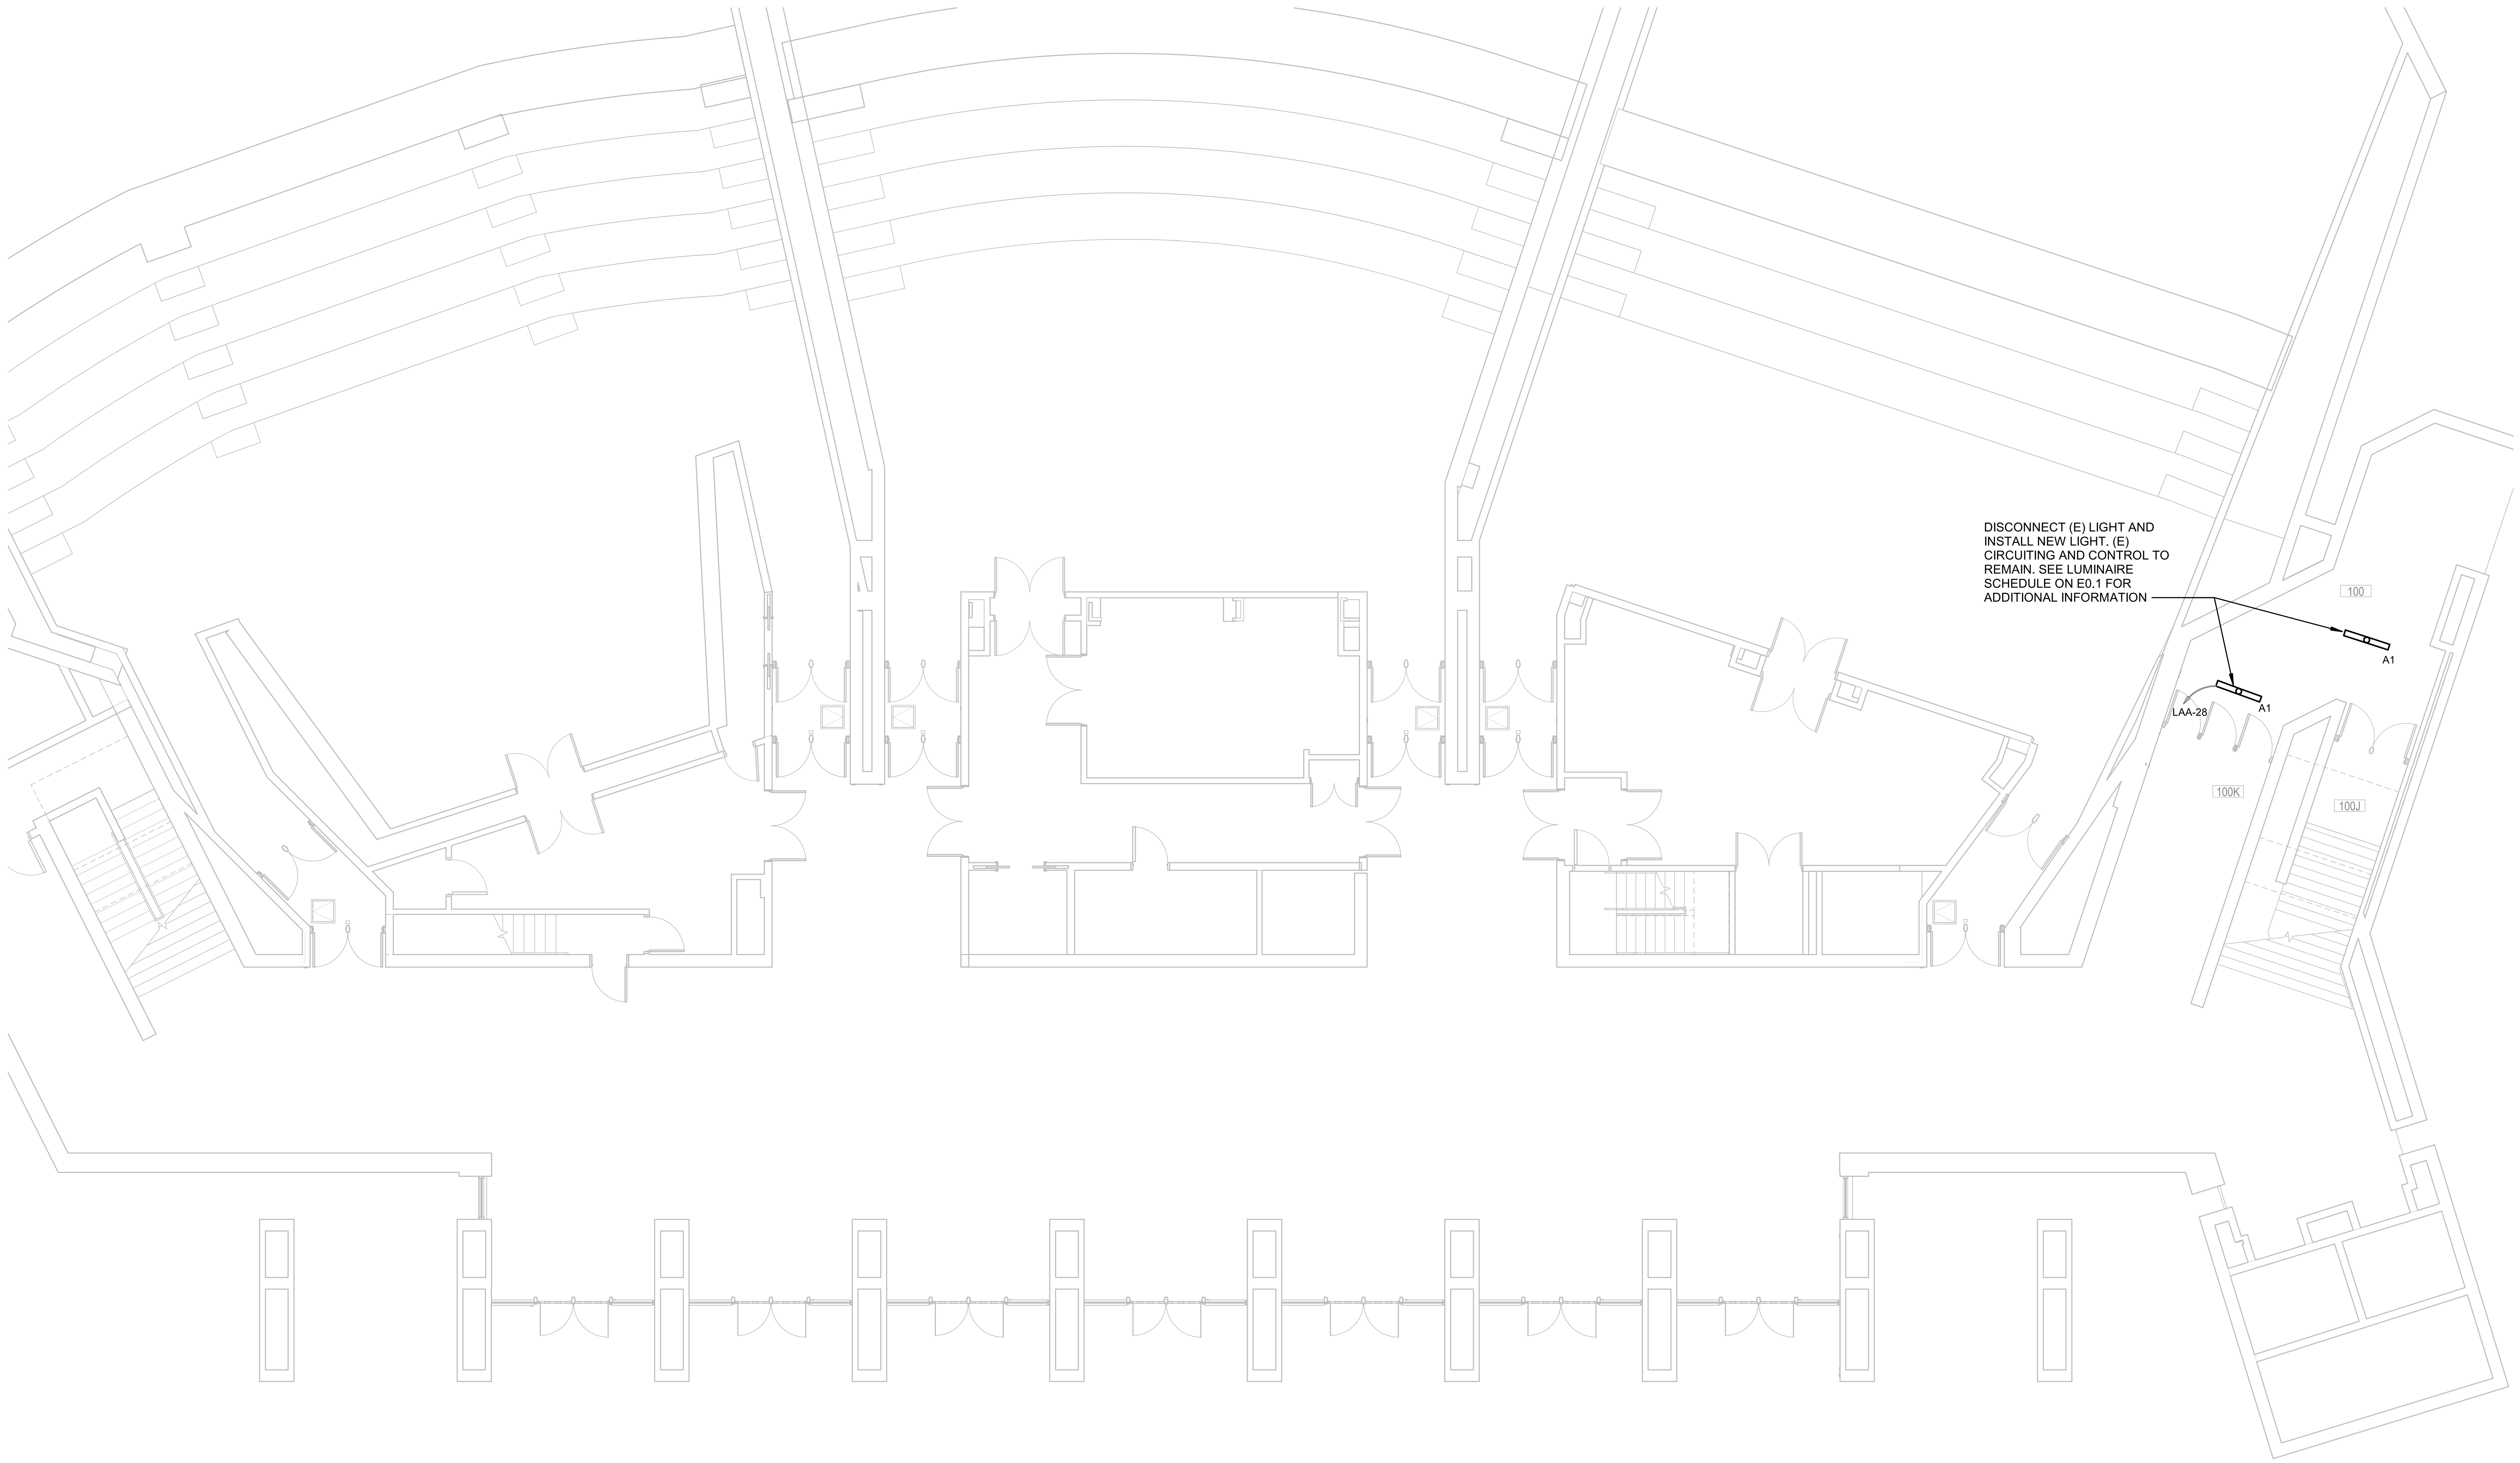

1 / E2.1 **FIRST FLOOR (LOWER) LIGHTING PLAN**

SCALE: 1/8" = 1'-0"

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMS

BID SET

CONSULTANT NAME

shks ARCHITECTS

HARGIS

1201 third avenue, ste 600
seattle, wa 98101
206.448.3376
www. hargis.biz

SEAL

04/15/26

KEYPLAN

REV	DESCRIPTION	DATE

DATE	04/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	TV
CHECKED	BH
APPROVED	DS
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	KNE

SHEET NAME

FIRST FLOOR (LOWER) LIGHTING PLAN

SHEET No.

E2.1

4/10/2026 1:51:46 PM

SHEET NOTES

1. REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATION OF DEVICES.
2. EXISTING ITEMS SHOWN ARE DIAGRAMMATIC BASED ON AVAILABLE RECORD DRAWINGS AND SITE WALKS DURING THE DESIGN PERIOD. NOT ALL SYSTEM COMPONENTS ARE SHOWN. FIELD VERIFY DEVICE LOCATIONS AND QUANTITIES PRIOR TO COMMENCING WORK.

SCOPE NARRATIVE

EXTEND EXISTING POWER FROM EXISTING CAAMS PANEL TO NEW CAAMS PANEL.

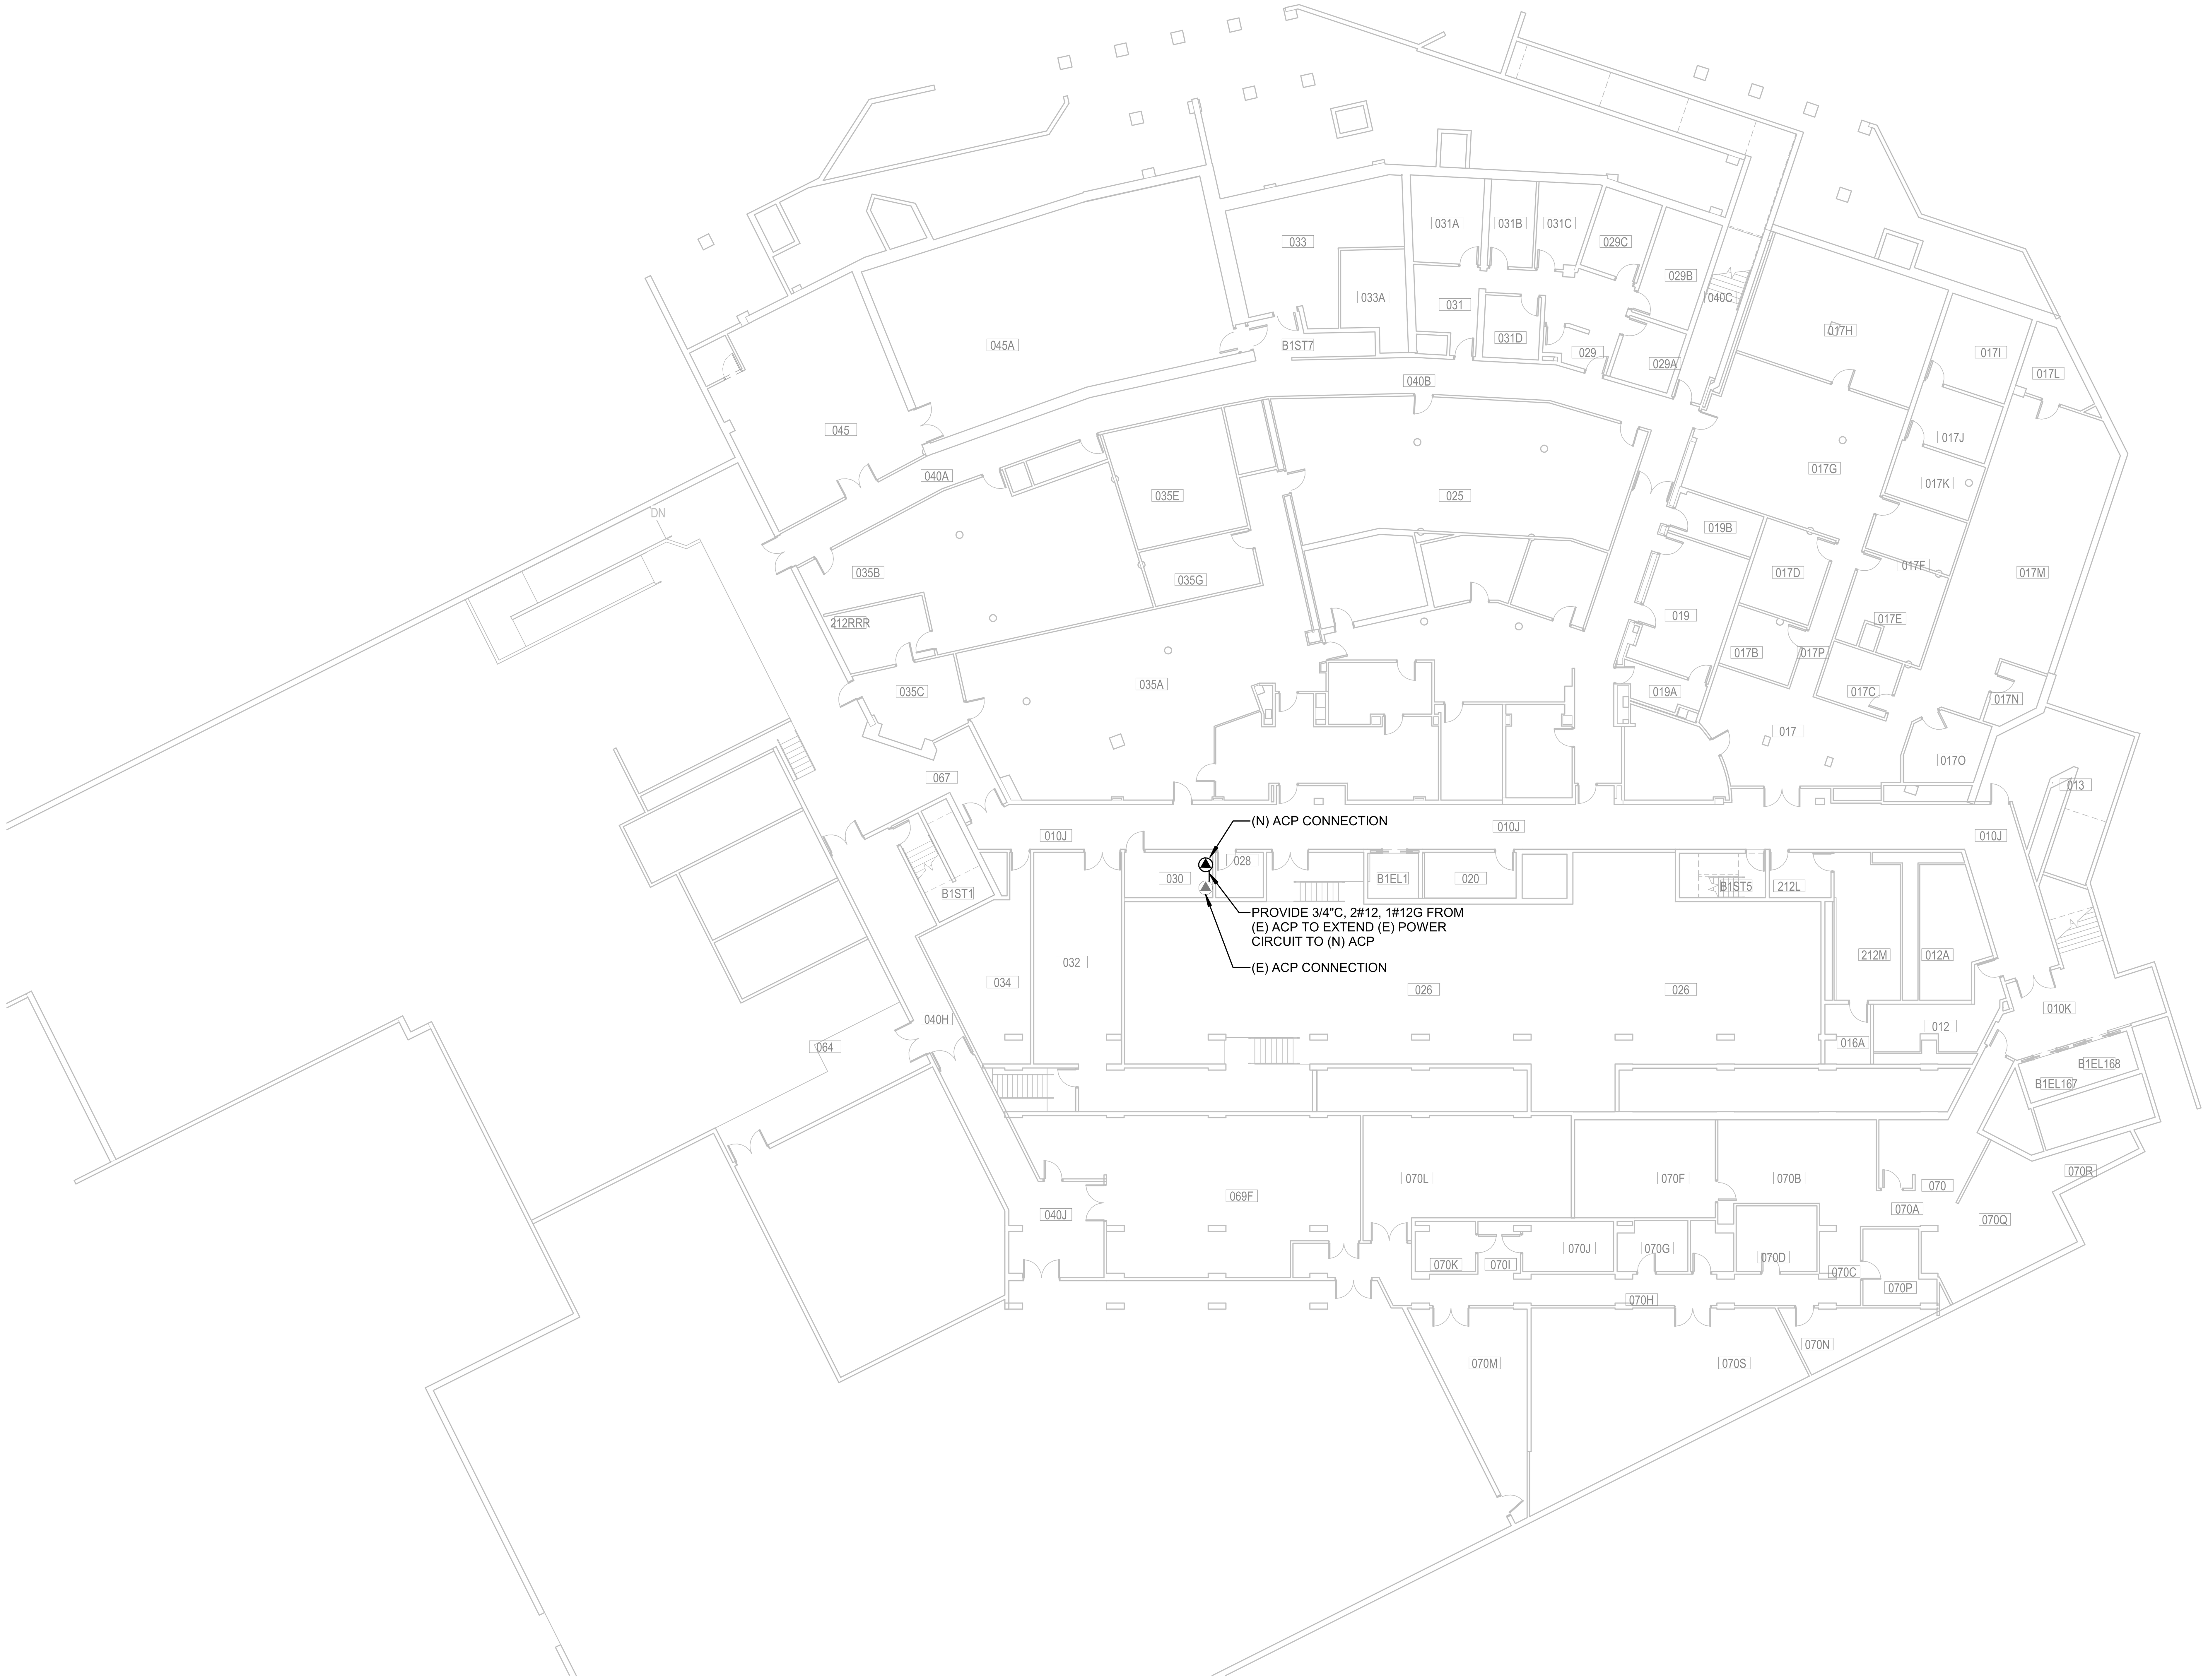

BASEMENT ELECTRICAL FLOOR PLAN

1
E6.1
SCALE: 1/16" = 1'-0"

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL CAAMS

BID SET

CONSULTANT NAME

shks ARCHITECTS

HARGIS

1201 third avenue, ste 600
seattle, wa 98101
206.448.3376
www. hargis.biz

SEAL

04/15/26

KEYPLAN

REV	DESCRIPTION	DATE

DATE	04/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	TV
CHECKED	BH
APPROVED	DS
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	KNE

SHEET NAME

BASEMENT ELECTRICAL FLOOR PLAN

SHEET No.

E6.1

4/10/2026 1:51:47 PM

SHEET NOTES

1. REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATION OF DEVICES.
2. EXISTING ITEMS SHOWN ARE DIAGRAMMATIC BASED ON AVAILABLE RECORD DRAWINGS AND SITE WALKS DURING THE DESIGN PERIOD. NOT ALL SYSTEM COMPONENTS ARE SHOWN. FIELD VERIFY DEVICE LOCATIONS AND QUANTITIES PRIOR TO COMMENCING WORK.

SCOPE NARRATIVE

PROVIDE 20A CIRCUIT FROM EXISTING SPARE BREAKER IN EXISTING PANEL 'LAA' TO THE NEW CAAMS PANEL.

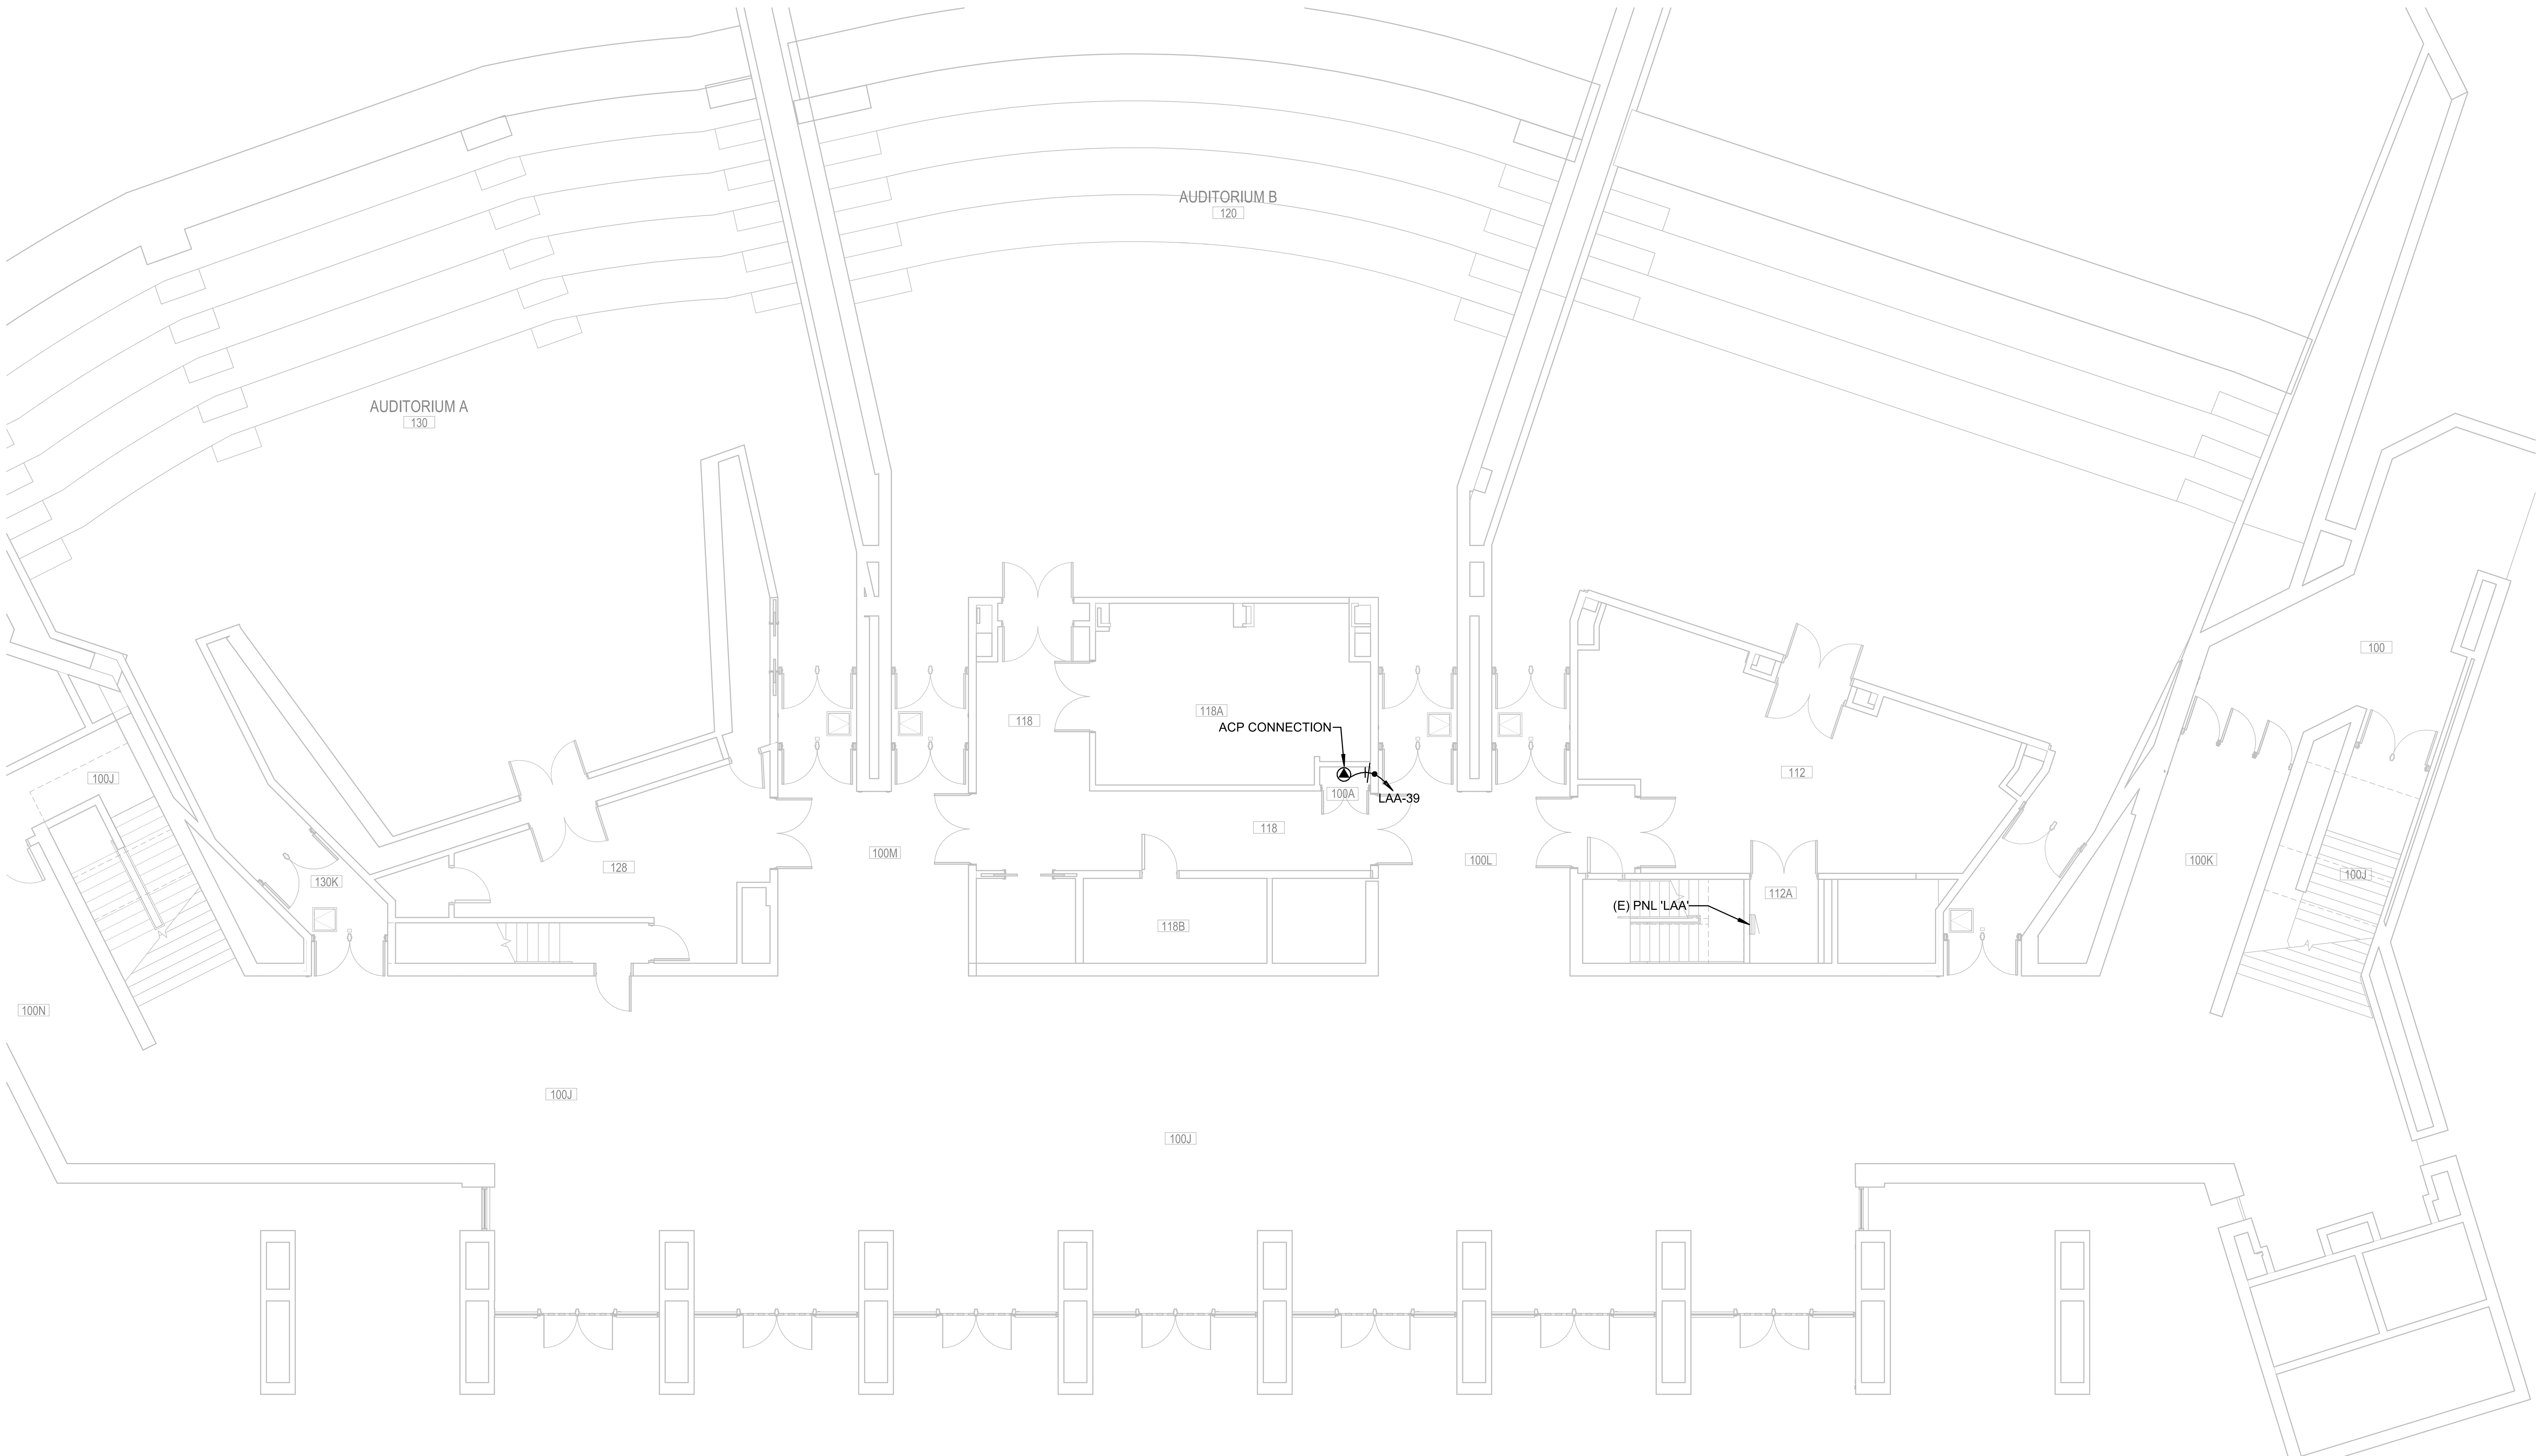

1
E6.2
FIRST FLOOR (LOWER) ELECTRICAL PLAN
SCALE: 1/8" = 1'-0"

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL
CAAMS

BID SET

CONSULTANT NAME

shks ARCHITECTS

HARGIS

1201 third avenue, ste 600
seattle, wa 98101
206.448.3376
www. hargis.biz

SEAL

04/15/26

KEYPLAN

REV	DESCRIPTION	DATE

DATE	04/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	TV
CHECKED	BH
APPROVED	DS
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	KNE

SHEET NAME

FIRST FLOOR (LOWER) ELECTRICAL PLAN

SHEET No.

E6.2

4/10/2026 1:51:47 PM

SHEET NOTES

1. REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATION OF DEVICES.
2. EXISTING ITEMS SHOWN ARE DIAGRAMMATIC BASED ON AVAILABLE RECORD DRAWINGS AND SITE WALKS DURING THE DESIGN PERIOD. NOT ALL SYSTEM COMPONENTS ARE SHOWN. FIELD VERIFY DEVICE LOCATIONS AND QUANTITIES PRIOR TO COMMENCING WORK.

SCOPE NARRATIVE

PROVIDE 20A CIRCUIT FROM EXISTING SPARE BREAKER IN EXISTING PANEL 'PB' TO THE NEW CAAMS PANEL.

1
E6.3
PARTIAL FIRST FLOOR (UPPER) ELECTRICAL PLAN - EAST
SCALE: 1/8" = 1'-0"

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL
CAAMS

BID SET

CONSULTANT NAME

shks ARCHITECTS

HARGIS
1201 third avenue, ste 600
seattle, wa 98101
206.448.3376
www. hargis.biz

SEAL

ERIK S. STEARNS
STATE OF WASHINGTON
REGISTERED PROFESSIONAL ENGINEER
04/15/26

KEYPLAN

REV	DESCRIPTION	DATE

DATE	04/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	TV
CHECKED	BH
APPROVED	DS
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	KNE

SHEET NAME

PARTIAL FIRST FLOOR (UPPER) ELECTRICAL PLAN - EAST

SHEET No.

E6.3

4/10/2026 1:51:48 PM

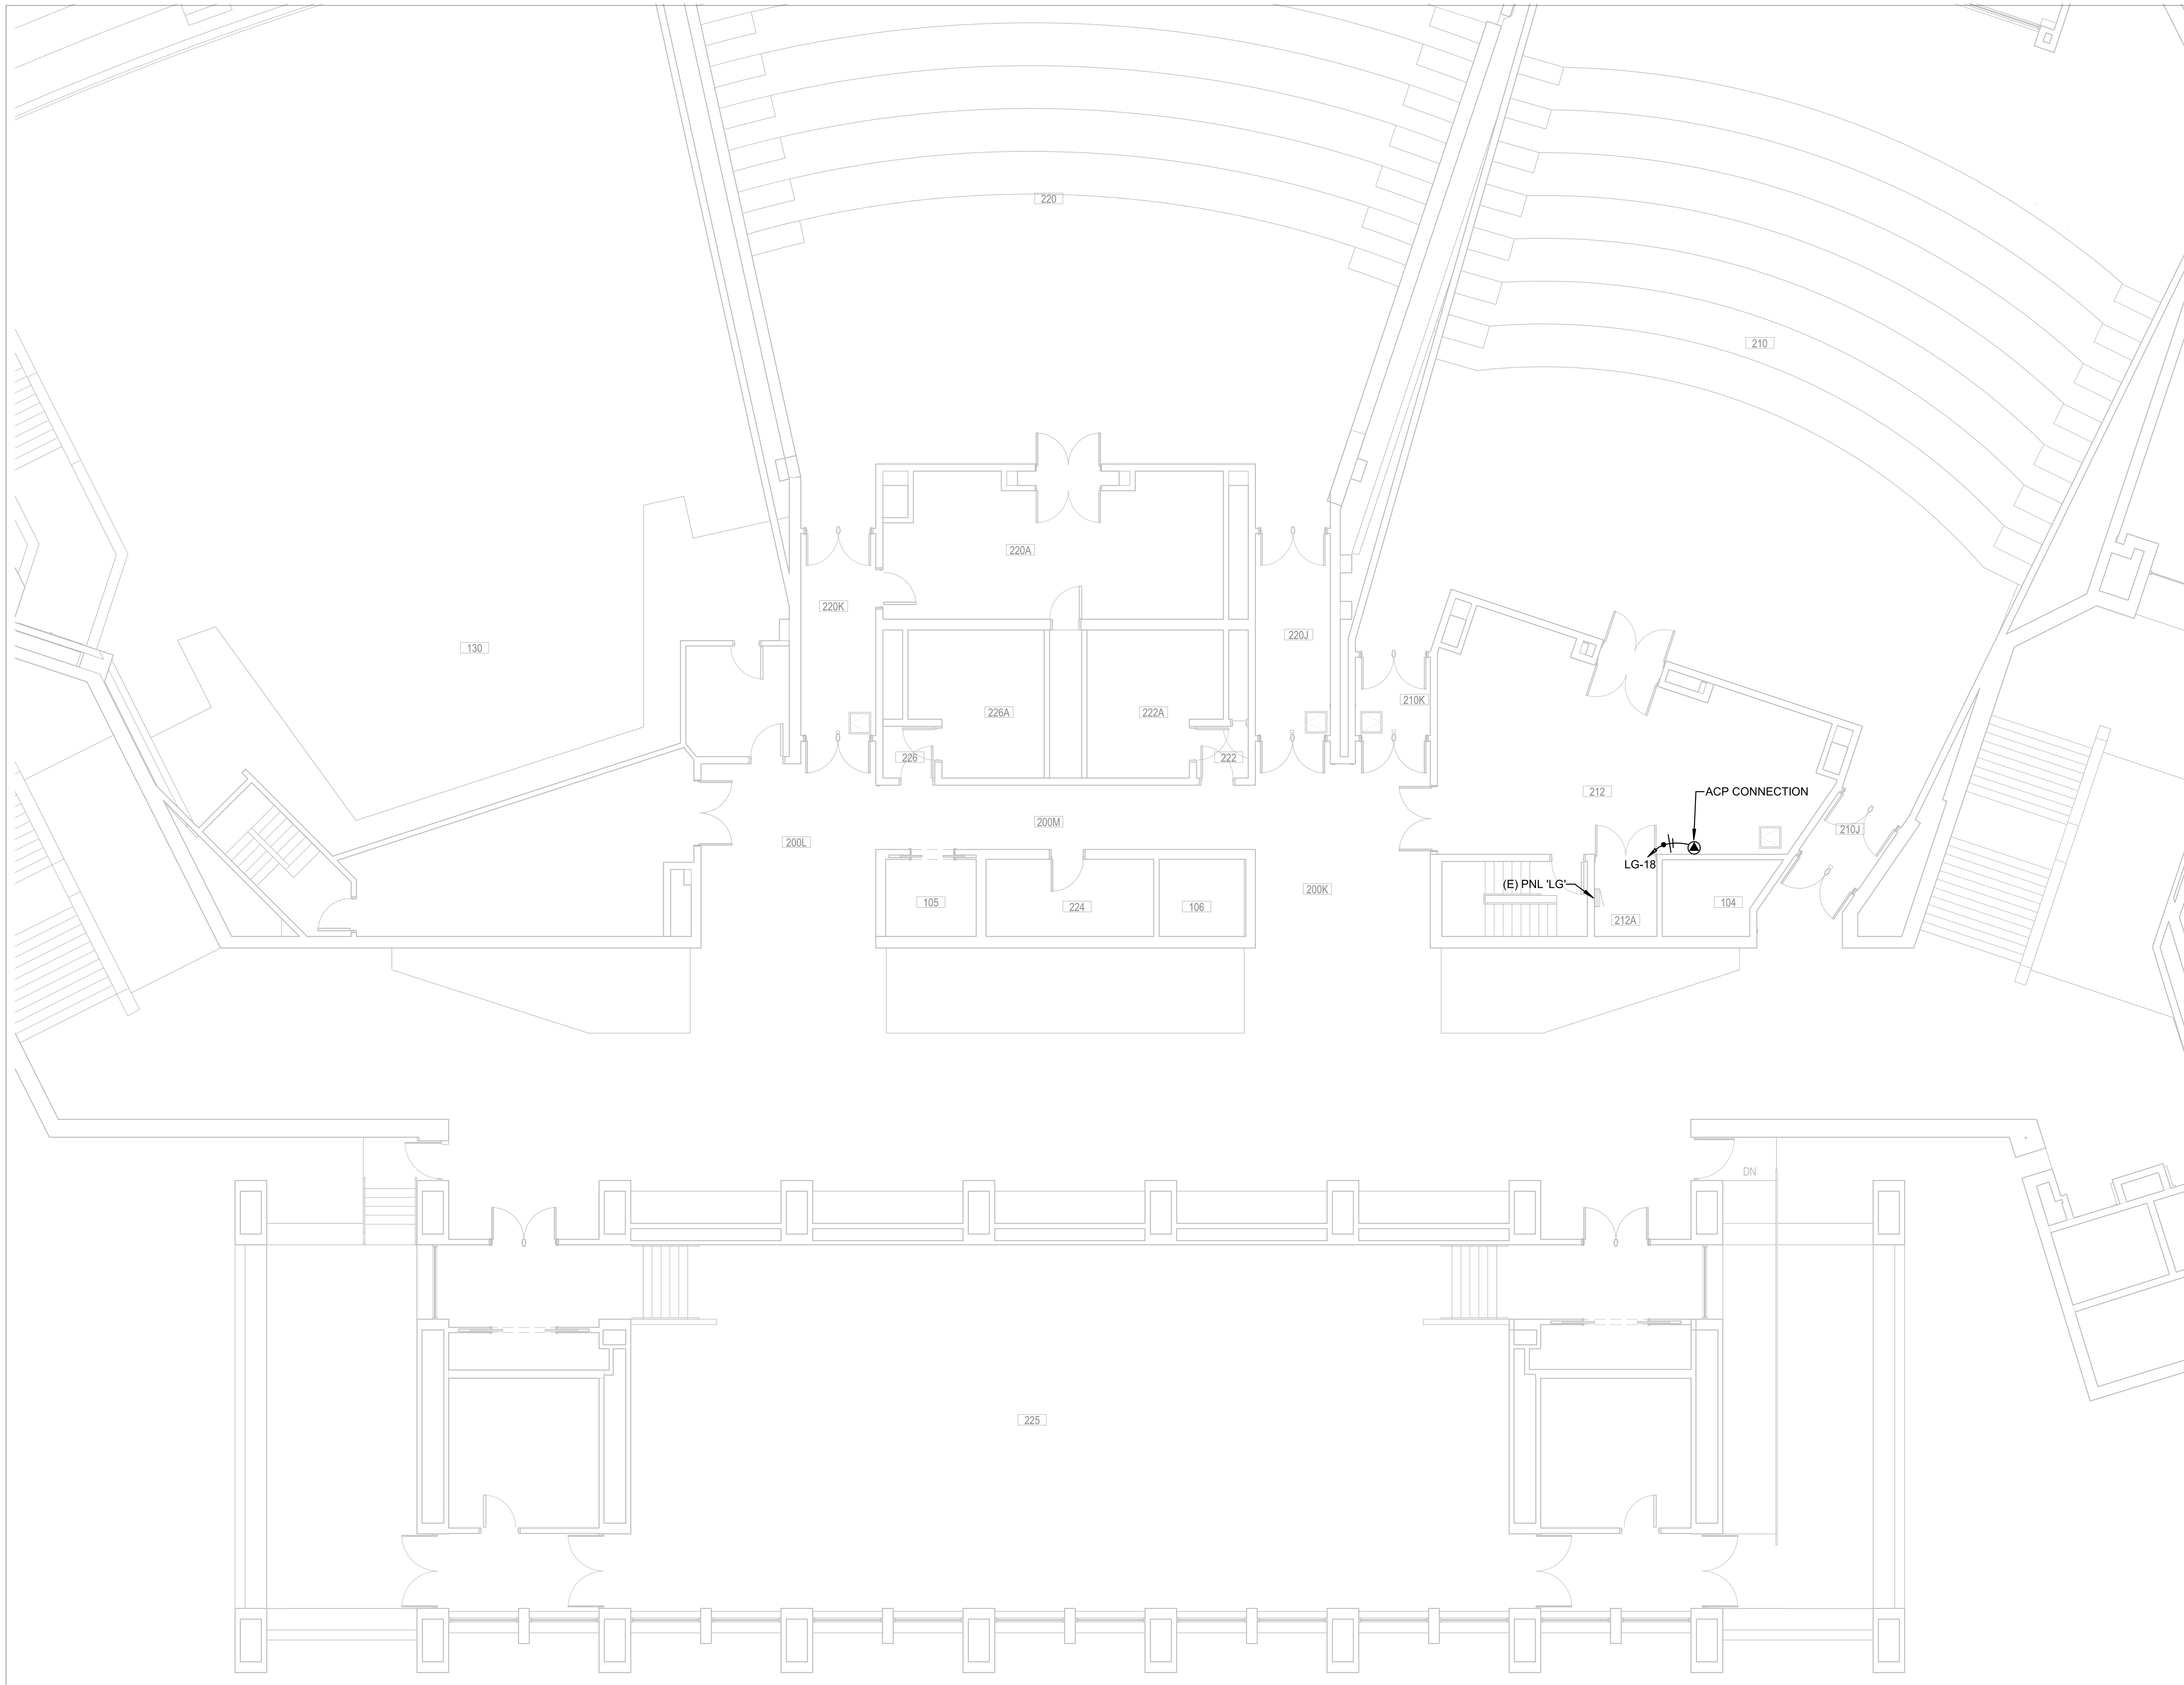

1
E6.4
SECOND FLOOR (LOWER) ELECTRICAL PLAN
SCALE: 1/8" = 1'-0"

SHEET NOTES

1. REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATION OF DEVICES.
2. EXISTING ITEMS SHOWN ARE DIAGRAMMATIC BASED ON AVAILABLE RECORD DRAWINGS AND SITE WALKS DURING THE DESIGN PERIOD. NOT ALL SYSTEM COMPONENTS ARE SHOWN. FIELD VERIFY DEVICE LOCATIONS AND QUANTITIES PRIOR TO COMMENCING WORK.

SCOPE NARRATIVE

PROVIDE 20A CIRCUIT FROM EXISTING SPARE BREAKER IN EXISTING PANEL 'LG' TO THE NEW CAAMS PANEL.

UNIVERSITY OF WASHINGTON

PROJECT TITLE

UW KANE HALL
CAAMS

BID SET

CONSULTANT NAME

shks ARCHITECTS

HARGIS

1201 third avenue, ste 600
seattle, wa 98101
206.448.3376
www. hargis.biz

SEAL

ERIK S. STEARNS
REGISTERED PROFESSIONAL ENGINEER
04/15/26

KEYPLAN

REV	DESCRIPTION	DATE

DATE	04/15/26
PROJECT No.	208570
PROJECT MANAGER	JR
DESIGNER	TV
CHECKED	BH
APPROVED	DS
FACILITY No.	1276
RECORD/SDCI No.	
BLDG ID	KNE

SHEET NAME

SECOND FLOOR (LOWER) ELECTRICAL PLAN

SHEET No.

E6.4

4/10/2026 1:51:48 PM